

AlphaServer DS10L

System Boards	Digital Classic Part
Mother Board, EV6 Tsunami 2M/4M, IBM SRAM BCache	54-30074-22
Mother Board, EV6 Tsunami 2M/4M, Motorola SRAM BCache	54-30074-21

Configuration Code	Digital Classic Part
P1B71	**-.71AAA-**-

Memory	Digital Classic Part
64 MB, 200 Pin, 3.3V, 64M-Bit SDRAM (8MX8), Single Density, 100 MHz	54-25053-BA
128 MB, 200 Pin, 3.3V, 64M-Bit SDRAM (16MX4), Single Density, 100 MHz	54-24941-EA
256 MB, 200 Pin, 3.3V, 64M-Bit SDRAM (16MX4), Double Density, 100 MHz	54-24941-FA
512 MB, 200 Pin, 3.3V, 128M-Bit SDRAM (32MX4), Double Density	54-24941-JA

Miscellaneous	Spare Part	Digital Classic Part
CD/Diskette/Hard Drive Bracket	168658-001	70-40326-01
Fan Assembly, Tube Axial, Dual (front assembly), 12VDC, 40 mm		12-45918-02
Fan Assembly, Tube Axial, Dual (front/rear assembly), 12VDC, 40 mm square, Ballbearing		12-45918-03
Fan Assembly, Heat Sink and Blower for EV6		12-50036-01
Hard Drive Bracket Assembly		70-40328-01
LED Assembly Switch		70-40097-01
Left DIMM Riser		54-30244-01
Miscellaneous Parts Kit		70-XXXXXX-XX
One Slot Riser		54-30242-01
Paddle Module, Slim (IDE/floppy adapter assembly)		54-25649-02
Right DIMM Riser		54-30246-01
Speaker Assembly w/Harness and Connector		12-49797-02
Wire Harness Assembly, 4 Pos, 330 mm (LVD SCSI cable)		17-04472-01

Hard Drives	Digital Classic Part
9.1 GB Ultra2 SCSI, 7200 rpm	DS-RZ2DA-WA
9.1 GB Ultra2 SCSI, 10K rpm	DS-RZ1DD-WA
10.0 GB IDE	3X-RE56A-AA
18.2 GB Ultra2 SCSI, 7200 rpm	DS-RZ2EA-WA
18.2 GB Ultra2 SCSI, 10K rpm	DS-RZ2EF-WA


AlphaServer DS10L

Cables	Digital Classic Part
Cable Assembly, Flat, 34 Cond, w/ 2-Polarized IDC Female SKTS (floppy cable)	17-03970-03
Cable Assembly, Flat, 40 Cond, (2) Receptor Connectors (IDE cable)	17-04803-02
Cable Assembly, Flat, 68 Cond, 30 AWG, (3) Micro D Plug, Term (SCSI cable)	17-04983-01
Power Supply/Battery	Digital Classic Part
Power Supply, Switching, 150 W, PFC	30-56126-01

AlphaServer DS10L


Memory Upgrade Chart

SYSTEM BOARDS
54-30074-22
54-30074-21

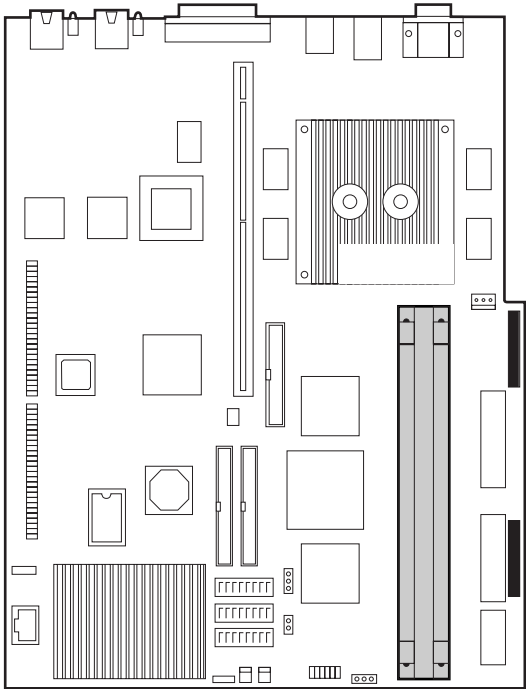

A memory option consists of two DIMMs.
All DIMMs in an option must be the same size.

A MAXIMUM OF 1 GB TOTAL MEMORY



128-MB 100 MHz SDRAM DIMMs	OPTION PN 3X-MS310-BA
256-MB 100 MHz SDRAM DIMMs	OPTION PN 3X-MS310-CA
512-MB 100 MHz SDRAM DIMMs	OPTION PN 3X-MS310-DA