

Deskpro 5120

System Boards	Assembly	Spare Part	System
System Board, PCI, AM ¹ , ENET, w/o Processor	003768-014	172610-001	3x3 ²
	003771-014	172611-001	4x4
	003774-014	172020-001	4x4
System Board	004936-001	173241-001	5x5
System Board, ENET, AM	004936-001	173241-001	4x4
System Board, ENET, AM	005897-101 ³	251556-001	3x3, 4x4

¹ AM = Asset Management.

² 3x3 = 3 bay, 3 slot form factor.

³ Uses EDO and FPM SIMMs.

Configuration Jumpers, Pentium System Boards(003768, 003771, 003774, 004936, 005897)

Jumper	Function	Setting	Description
E5	Internal/External Battery	1 - 2 2 - 3	Internal (on-board) Battery External Battery. Connect at header P3.
E6	Password Enable/Disable	1 - 2 2 - 3	Password Enabled Password Disabled

SW1, Speed Settings, Pentium System Boards (003768², 003771², 003774², 004936, 005897)

BUS Proc. Speed (MHz)	S1	S2	S3	S4
50/125	ON	ON	OFF	ON
50/100	ON	ON	OFF	OFF
50/75	ON	OFF	OFF	OFF
66/133	OFF	ON	ON	OFF
60/120	OFF	ON	OFF	OFF
66/100	OFF	OFF	ON	OFF
60/90, 50/90	OFF	OFF	OFF	OFF
60/150 ¹	OFF	ON	OFF	ON
66/166 ¹	OFF	ON	ON	ON

¹ 005897 system board only.

² System boards with a 2-position switch use columns S1 and S2 only.

Configuration Code ¹	Assembly	System Board Spare Part	Form Factor
HSZ3	003768-101	172610-001	3x3
GSZ3	003768-101	172610-001	3x3
HWV2 ³	005897-101	251556-001	3x3
HSE1	003768-101	172610-001	4x4
HSE2	003768-101	172610-001	4x4
HSE3	003768-101	172610-001	4x4
HSE4 ²	003774-101	172020-001	4x4
HSE4 ²	004936-101	173241-001	4x4
HSE5	003768-101	172610-001	4x4
HSE6	003768-101	172610-001	4x4
HSE7	003771-101	172611-001	4x4
HSE8	004936-101	173241-001	4x4
HSE9	004936-101	173241-001	4x4

Continued

Deskpro 5120

Configuration Code ¹	Assembly	System Board Spare Part	Form Factor
GSE1	003768-101	172610-001	4x4
GSE2	003768-101	172610-001	4x4
GSE3	003768-101	172610-001	4x4
GSE4	003774-101	172020-001	4x4
GSE4 ²	004936-101	173241-001	4x4
GSE5	003768-101	172610-001	4x4
GSE6	003768-101	172610-001	4x4
GSE7	003771-101	172611-001	4x4
GSE8	004936-101	173241-001	4x4
GSE9	004936-101	173241-001	4x4
HXA2 ³	005897-101	251556-001	4X4
HSP2	004936-101	173242-001	5x5
GSP2	004936-101	173242-001	5x5

¹ "G" codes are European models. "H" codes are worldwide.

² Must use assembly number AND configuration code to order spare.

³ Use EDO or FPM SIMMs.

Microprocessors	Spare Part	System
P54C120	213125-001	All

Memory	Assembly	Spare Part	System
4 MB FPM SIMM, 70ns	172707-002	172718-001	All
8 MB FPM SIMM, 70ns	172707-003	172719-001	All
16 MB FPM SIMM, 70ns	172707-004	172938-001	All
32 MB FPM SIMM, 70ns	172707-005	172939-001	All
4 MB EDO SIMM, 70ns ³	185173-001	236656-001	All
8 MB EDO SIMM, 70ns ³	185172-001	236657-001	All
16 MB EDO SIMM, 70ns	185174-001	251577-001	All
32 MB EDO SIMM, 70ns	185207-001	251578-001	All
1 MB Video Memory, VRAM ¹	003971-001	172467-001	All
2 MB Video Memory, VRAM ⁴	004539-001	137895-001	All
2 MB Video Memory, WRAM ²		223339-001	4x4, 5x5
6 MB Video Memory, WRAM ²		223340-001	4x4, 5x5

¹ QVision 1280P+. ² Millennium Graphics Board.

³ 60ns EDO SIMMs are used as alternatives. ⁴ QVision 1280P+.

Miscellaneous	Assembly	Spare Part	System
Backplane	003736-001	172624-001	5x5
		172623-001	4x4
		172622-001	3x3
Backplane (HXA2)	003733-002	172623-002	4x4
Speaker w/ Bracket	141045-001	172831-001	All
WSS Feature Card	004198-001	172078-001	4x4, 5x5

Controller Boards	Assembly	Spare Part	System	Page
IDE Controller	002172-001	171745-001	All	X
6260 SCSI-2 Controller	004004-001	133880-001	All	A-6
Ethernet ISA Controller w/ Slot Bracket	003086-001	147220-001	All	X
QVision 2000+ Graphics, 2 MB	004111-001	137897-001	All	X
SCSI ISA, Plug & Play Controller	184750-001	184751-001	4x4, 5x5	X
Millennium, Graphics, 2 MB	005409-002	223337-001	4x4, 5x5	X

Deskpro 5120

CD-ROM Drive	Spare Part	System
CD-ROM, Internal, Quad Speed, IDE	172717-001	All
CD-ROM, 16X, IDE, Slot Load, 5.25", Half Height	278791-001	All

Hard Drives	Type	Spare Part	System
420 MB, IDE	65	172780-001	All
535 MB SCSI	N/A	148286-001	All
540 MB, IDE, DFP*	65	188666-001	All
630 MB	65	173114-001	All
720 MB, IDE	65	172842-001	All
1.05 GB SCSI	N/A	192799-001	All
1.08 GB, IDE, DFP	65	172941-001	All
1.2 GB, IDE	65	225520-001	3x3, 4x4
2.1 GB Fast SCSI-2	N/A	142272-001	All

* DFP = Drive Fault Prediction.

Tape Drives	Spare Part	System	Tape Cartridge	Spare Part
340/680 MB w/ Comp	187658-001	All	340 MB	184299-001
			680 MB	184300-001
525 MB ACA	142073-201	All	525 MB	119504-001
4 GB TR4, IDE	294126-001		4 GB TR4	294140-001
5.0 GB DAT	142074-201	All	2.0 GB DAT	131148-001
			5.0 GB DDS2	199496-001

Diskette Drives	Spare Part	System
1.44 MB, 3-Mode	160788-201	All

28.8k-bps Modem

Country	Assembly	Spare Part	RJ-11 Phone Cable	Option
U.S.	223610-002	259214-002	127949-001	259213-001

Cables	Spare Part	System
CD-ROM/Hard Drive Cable	172478-001	3x3, 4x4
	172481-001	5x5
Diskette Drive Cable	172477-001	3x3
	172797-001	4x4
	172480-001	5x5
2-Device SCSI, 3-Connector	146997-001	3x3, 4x4, 5x5
Hard Drive Select Cable	172945-001	3x3, 4x4, 5x5
LED Assembly	172531-001	3x3, 4x4
	172530-001	5x5
Monitor ID Cable (asset control)	172482-001	3x3, 4x4, 5x5
Adapter, AUI to BNC E/Net Transceiver, Ext.	192768-001	3x3, 4x4, 5x5
2-Device SCSI, 3-Connector, Plug and Play	184118-001	4x4, 5x5

Deskpro 5120


ROM Information	Spare Part	System
System ROMPaq	148218-001	All

Power Supply/Battery	Spare Part	System
Power Supply, 145 W	172765-001	3x3, 4x4
Power Supply, 185 W	172838-001	5x5
Real-Time Clock Battery (4.5 V Alkaline)	160274-001	3x3, 4x4, 5x5


Deskpro 5120

Memory Upgrade Chart

PROCESSOR BOARD
003768/003771/003774/004936 (FPM only)
005897 (EDO or FPM)
(8 or 16 MB)

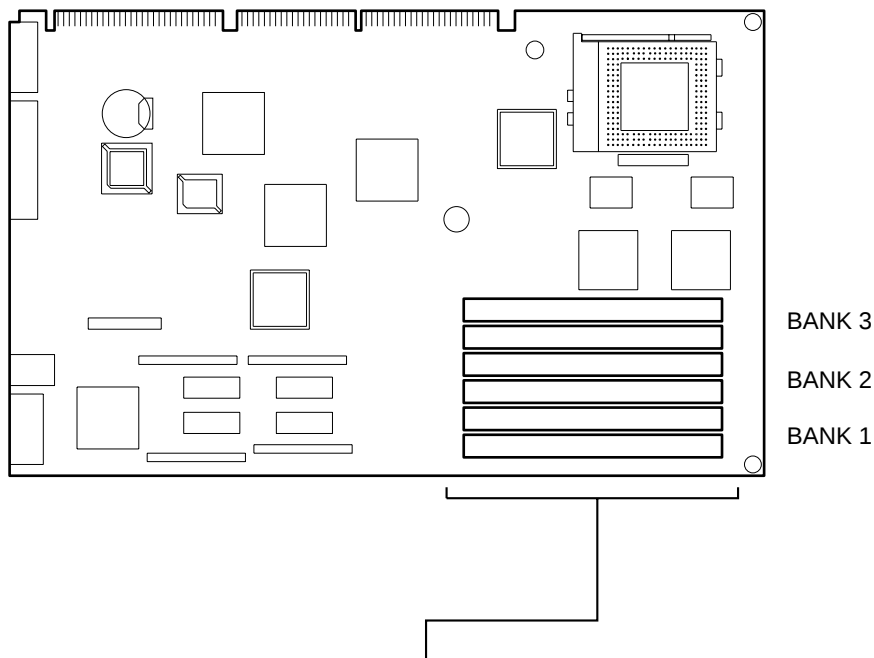

ADD MEMORY MODULES IN MATCHED PAIRS INTO BANKS 1,2 OR 3,
UP TO 192 MEGABYTES TOTAL SYSTEM MEMORY



4-MB FPM 70ns - OPTION PN 172712-001

8-MB FPM 70ns - OPTION PN 172713-001

16-MB FPM 70ns - OPTION PN 172714-001

32-MB FPM 70ns - OPTION PN 172715-001

8-MB EDO 70ns - OPTION PN 243011-001

16-MB EDO 70ns - OPTION PN 243012-001

32-MB EDO 70ns - OPTION PN 243013-001

64-MB EDO 70ns - OPTION PN 243014-001

NOTE: 60ns EDO SIMMS ARE USED AS ALTERNATIVES