

Deskpro XL Family

System Board	Assembly	Spare Part
System Board	004033	148077-001
System Board	005625	210982-001

System Board Switch and Jumper Settings (004033, 005625)

SW1	Position	Function/Description
S1	ON (NO)	Flash ROM Update
	OFF (YES)	Default
S2	ON (YES)	Lock EISA Configuration
	OFF (NO)	Default
S3	ON (YES)	Set Diskette Drive to Read Only
	OFF (NO)	Default
S4	ON (YES)	Override EISA Config Diskette Boot Control
	OFF (NO)	Default
S5	ON (YES)	Clear Power-On Password
	OFF (NO)	Default
S6	ON (YES)	Erase EISA Configuration
	OFF (NO)	Default

Processor Board (004027-102) Jumper Settings

	Setting	External Clock Speed
E1	1 - 2	33 MHz
	2 - 3	25 MHz

Pentium Pro Processor Speed Switch Settings

Proc Speed	Bus Frequency	Switch 2 Settings			Switch 3 Settings		
		S1	S2	S3	S1	S2	S3
150 MHz	60 MHz	OFF	ON	ON	ON	OFF	OFF
180 MHz*	60 MHz	OFF	ON	ON	OFF	ON	OFF
200 MHz	60 MHz	OFF	OFF	OFF	OFF	ON	OFF

* Not a supported Compaq option.

Processor Boards	Assembly	Spare Part
486DX2/50 w/o Processor	004027-102	148075-001
486DX2/66 w/o Processor	004027-101	148154-001
Pentium/60 w/o Processor	004024-102	148238-001
Pentium/66 w/o Processor	004159-101	148073-001
Pentium/75 w/o Processor (16 MB)	003510-102	213114-001
Pentium/90 w/o Processor (16 MB)	003510-101	148151-001
Pentium/100 w/o Processor (16 MB)	003510-104	213115-001
Pentium/120 w/o Processor (16 MB)	004843-107	213126-001
Pentium/133 w/o Processor (16 MB)	005126-101	223309-001
Pentium Pro 200 w/o Processor	004407-101	210911-001

Microprocessors	Spare Part
486DX2/50 Processor	163661-001
486DX2/66 Processor	194395-001
Pentium/60 Processor	148289-001
Pentium/66 Processor	148290-001
Pentium/75 Processor	213112-001
Pentium/90 Processor	192764-001
Pentium/100 Processor	213113-001
Pentium/120 Processor	213125-001
Pentium/133 Processor	223311-001
Pentium Pro 150 w/ 256K Cache	210966-001
Pentium Pro 200 w/ 256K Cache	210998-001
Heat Sink Kit	185960-001

Deskpro XL Family

Memory	Assembly	Spare Part
1 MB SIMM, 70ns		141752-001
2 MB SIMM, 70ns	118666-004	141753-001
4 MB SIMM, 70ns	118665-004	141754-001
8 MB SIMM, 70ns	129041-002	141755-001
16 MB SIMM, 70ns		149947-001
32 MB SIMM, 70ns		149948-001
8 MB DIMM, 60ns*	169230-002	211007-001
16 MB DIMM, 60ns	169231-002	219390-001
16 MB DIMM, 70ns*		210943-001
32 MB DIMM, 60ns	169232-002	219391-001
32 MB DIMM, 70ns*		219391-001
64 MB DIMM, 60ns	169233-002	219392-001
64 MB DIMM, 70ns*		210962-001
Millennium Video Memory, 2 MB		223339-001
Millennium Video Memory, 6 MB		223340-001
QVision 1280P Video Memory, 1 MB	002954-001	139167-001

* Either 60- or 70ns DIMMs can be used on XL6200. No switch settings necessary.

Controller Boards	Assembly	Spare Part
QVision 1280/P Graphics Controller	003554-001	148257-001
QVision 2000 Graphics Cntrl. (ver. 1)	004039-001	148260-001
		*
QVision 2000 Graphics Cntrl. (ver. 2)	004039-002	192780-001
Matrox Millennium 2M Controller	005409-002	223337-001
Token Ring 16TR Controller	004063	142836-001

* Used only on models manufactured prior to serial number range 6446xxxxxxx.

Miscellaneous	Assembly	Spare Part	Page
SpeedPaq 144/I Data and Fax Modem	003002	147453-001	D-5
Keyboard, Space Saver, US	160650-101	160648-001	
Mouse	141649-001	141189-201	

28.8k-bps Modem

Country	Assembly	Spare Part	RJ-11 Phone Cable	Option
U.S.	223610-002	259214-002	127949-001	259213-001

Hard Drives	Type	Interleave	Integrated	Min ROM	Spare Part
170 MB IDE	64	1:1	Y	092893	194367-001
270 MB IDE	65	1:1	Y	092893	197441-001
340 MB IDE	63	1:1	Y	092893	199966-001
525 MB IDE	42	1:1	Y	092893	197014-001
535 MB SCSI	N/A	1:1	Y	092893	148286-001
1.05 GB SCSI	N/A	1:1	Y		192799-001
2.1 GB SCSI	N/A	1:1	Y		142272-001
2.15 GB SCSI	N/A	1:1	Y		223325-001
4.3 GB SCSI	N/A	1:1	Y		199585-001

Deskpro XL Family

Diskette Drives	Spare Part
1.2 MB	Discontinued
1.44 MB, 3-Mode, Beach Grey (light bezel)	144207-201
1.44 MB, 3-Mode, Clam Grey (dark bezel)	144207-001
5.25 Inch Diskette Drive (half height)	Discontinued

Tape Drives	Spare Part	Tape Cartridge	Spare Part
120-/250-MB * (1/2 height)	197490-001	120 MB (DC2120)	116967-001
150/250 MB	115220-001	150 MB (DC600XTD)	113234-001
		250 MB (DC6250)	115298-001
320/525 MB	116804-001	320 MB (DC6320)	119505-001
		525 MB (DC6525)	119504-001
525-MB ACA	142073-001	525 MB (DC6525)	119504-001
4 GB TR4, IDE	294126-001	4 GB TR4	294140-001
5.0-GB DAT	142074-001	1.3/3.3 GB (60 meters)	131167-001
		2.0/5.0 GB (90 meters)	131148-001

* With compression.

CD-ROM Drives	Spare Part
Internal Tray Load, 2X, SCSI, Clam Grey (dark bezel)	142223-001
Internal Tray Load, 2X, SCSI, Beach Grey (light bezel)	142223-201
External Tray Load, 2X, SCSI	199430-001
Power Drive CD-ROM, SCSI	184691-201
Power Drive Caddy	210969-001
Internal, Quad Speed, SCSI	184783-001
Quad Speed, IDE	172717-001
CD-ROM, 16X, IDE, Slot Load, 5.25", Half Height	278791-001

Cables	Spare Part
Hard Drive Signal	148216-001
Diskette/Tape Drive Signal (2 position)	148217-001
Diskette Cable (3 position)	192739-001
VAFC Connector Cable (to VAFC)	148285-001
VAFC Connector Cable (to VESA)	148378-001
CD-ROM Audio	194311-001
2-Peripheral SCSI (w/o terminator)	148351-001
3-Peripheral SCSI (w/ terminator)	148258-001
4-Peripheral SCSI (w/ terminator)	148259-001
AUI-BNC Connector	192768-001
IDE Dual Cable	172945-001
Quad/Power Drive CD Audio Cable Kit	222207-001
Diskette Drive Cable	234540-001

Deskpro XL Family

Clock/CMOS Battery Settings	Pins
Internal Battery	1 - 2
External Battery	2 - 3


ROM Information	Revision	Spare Part
System Flash ROM		148218-001
ROM	031594	148391-001
ROM	032194	148391-002
ROM	041394	148391-003
ROM	080594	148391-004
ROM	080594	148391-006
ROM	012095	148391-011
ROM	032795	148391-013
ROM	062895	148391-014
ROM	083095	148391-015
ROM	092695	148391-016
ROMPaq	102594	181660-001
ROMPaq	032194	148393-001
ROMPaq	041394	148393-002
ROMPaq	100595	148393-003
QVision 1280/P Flash ROM		137891-001
QVision 2000 Video ROM		137890-001

Power Supply/Battery	Spare Part
Power Supply	148119-001
Replacement Battery	160274-001
Clock Battery	234556-001

Deskpro XL Family

Memory Upgrade Chart


486 PROCESSOR BOARDS
004027-101, 004027-102

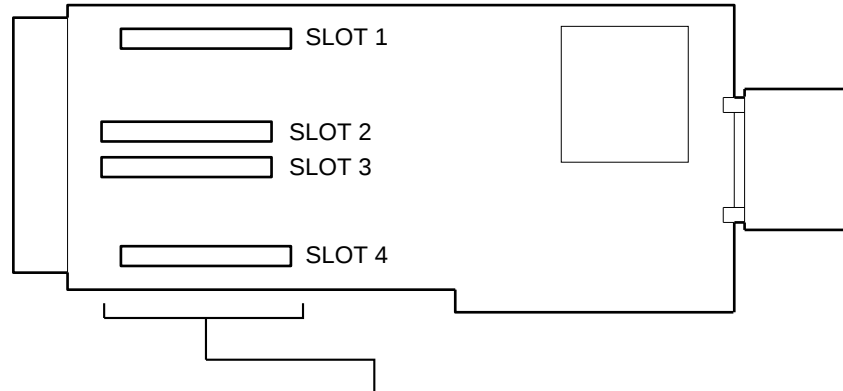

A MAXIMUM OF 128-MB TOTAL

MEMORY MODULES MUST BE INSTALLED TWO AT A TIME
IN SLOTS 1 AND 2, THEN 3 AND 4.

IF FOUR 32-MB SIMMS ARE USED, IT WILL DISABLE
THE 8-MB MEMORY ON THE PROCESSOR BOARD.



4-MB MEMORY KIT (2x2) 70 ns
OPTION PN 148187-001

8-MB MEMORY KIT (2x4) 70 ns
OPTION PN 148188-001

16-MB MEMORY KIT (2x8) 70 ns
OPTION PN 148189-001

32-MB MEMORY KIT (2x16) 70 ns
OPTION PN 148190-001

64-MB MEMORY KIT (2x32) 70 ns
OPTION PN 148191-001

Deskpro XL Family


Memory Upgrade Chart

PENTIUM PROCESSOR BOARDS
003510-101, 003510-102, 003510-104, 004159-101,
004024-102, 004843-107, 005126-107



A MAXIMUM OF 136-MB TOTAL (004024-102)
A MAXIMUM OF 144-MB TOTAL (003510-101, 003510-102,
003510-104, 004159-101, 004843-107, 005126-107)

MEMORY MODULES MUST BE INSTALLED TWO AT A TIME
IN SLOTS 1 AND 3, THEN 2 AND 4.



4-MB MEMORY KIT (2X2) 70 ns
OPTION PN 148187-001

8-MB MEMORY KIT (2X4) 70 ns
OPTION PN 148188-001

16-MB MEMORY KIT (2X8) 70 ns
OPTION PN 148189-001


32-MB MEMORY KIT (2X16) 70 ns
OPTION PN 148190-001

64-MB MEMORY KIT (2X32) 70 ns
OPTION PN 148191-001

Deskpro XL Family


Memory Upgrade Chart

P6 PROCESSOR BOARD
004407-001

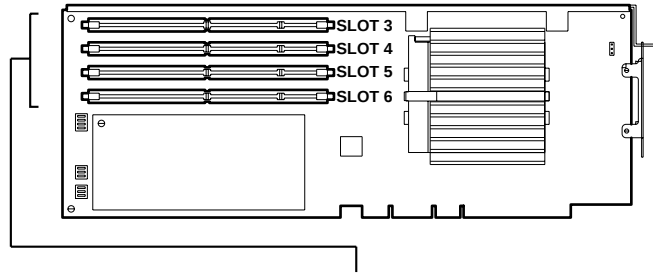

A MAXIMUM OF 512-MB TOTAL

MEMORY MUST BE ADDED IN MATCHED PAIRS
IN SLOTS 3 AND 4 , THEN 5 AND 6



8-MB MEMORY MODULE (60 ns) DIMMs
SPARE PN 211007-001
(No option part for 8-MB)

16-MB MEMORY MODULE (60 ns) DIMMs
OPTION PN 210948-001

32-MB MEMORY MODULE (60 ns) DIMMs
OPTION PN 210949-001

64-MB MEMORY MODULE (60 ns) DIMMs
OPTION PN 210956-001

128-MB MEMORY MODULE (60 ns) DIMMs
OPTION PN 210957-001