

ProLinea 5133

System Boards	Assembly	Spare Part	System
System Board, PCI, w/o Processor	004939-101	173239-001	4x4 ¹
		173240-001	5x5 ²
System Board, PCI, w/o Processor	004940-101	173243-001	4x4
		173244-001	5x5
System Board, PCI, w/o Processor	005900-101 ³	251559-001	4x4
System Board, PCI, w/o Processor	005901-101 ³	251560-001	4x4
System Board, PCI, w/o Processor	005900-101 ³	251570-001	5x5
	005901-101 ³	251571-001	

¹ 4x4 = 4 bay, 4 slot form factor.

² 5x5 = 5 bay, 5 slot form factor.

³ Uses EDO and FPM SIMMs.

Configuration Jumpers, Pentium System Boards (004939, 004940, 005900, 005901)

Jumper	Function	Setting	Description
E5	Internal/External Battery	1 - 2	Internal (on-board) Battery
		2 - 3	External Battery. Connect at header P3.
E6	Password Enable/Disable	1 - 2	Password Enabled
		2 - 3	Password Disabled

SW1, Speed Settings, Pentium System Boards (004939, 004940, 005900, 005901)

BUS Proc. Speed (MHz)	S1	S2	S3	S4
50/125	ON	ON	OFF	ON
50/100	ON	ON	OFF	OFF
50/75	ON	OFF	OFF	OFF
66/133	OFF	ON	ON	OFF
60/120	OFF	ON	OFF	OFF
66/100	OFF	OFF	ON	OFF
60/90, 50/90	OFF	OFF	OFF	OFF
60/150 ¹	OFF	ON	OFF	ON
66/166 ¹	OFF	ON	ON	ON

¹ 005900, 005901 system boards only.

Configuration Code ¹	Assembly Part Number	System Board Spare Part	Form Factor
HSU4	004939-101	173239-001	4x4
HSU5	004940-101	173243-001	4x4
HSU6	004940-101	173243-001	4x4
GSU4	004939-101	173239-001	4x4
GSU5	004940-101	173243-001	4x4
GSU6	004940-101	173243-001	4x4
HSK3	004939-101	173240-001	5x5
HSK4	004940-101	173244-001	5x5
HSK5	004940-101	173244-001	5x5
GSK3	004939-101	173240-001	5x5
GSK4	004940-101	173244-001	5x5
GSK5	004940-101	173244-001	5x5

¹ "G" codes are European models. "H" codes are worldwide.

ProLinea 5133

Configuration Code ¹	Assembly Part Number	System Board Spare Part	Form Factor
HXM2	005900-101	251559-001	3x3
HXS2	005900-101	251559-001	4x4
HXS4	005900-101	251559-001	4x4
HXS5	005901-101	251560-001	4x4
HXW2	005900-101	251570-001	5x5
HXW3	005901-101	251571-001	5x5
HXW4	005900-101	251570-001	5x5

¹ "G" codes are European models. "H" codes are worldwide.

Microprocessors	Spare Part	System
P54C133	223311-001	4x4, 5x5

Memory	Assembly	Spare Part	System
4 MB FPM SIMM, 70ns	172707-002	172718-001	All
8 MB FPM SIMM, 70ns	172707-003	172719-001	All
16 MB FPM SIMM, 70ns	172707-004	172938-001	All
32 MB FPM SIMM, 70ns	172707-005	172939-001	All
4 MB EDO SIMM, 70ns ⁴	185173-001	236656-001	All
8 MB EDO SIMM, 70ns ⁴	185172-001	236657-001	All
16 MB EDO SIMM, 70ns	185174-001	251577-001	All
32 MB EDO SIMM, 70ns	185207-001	251578-001	All
1 MB Video Memory, VRAM ²	003971-001	172467-001	All
1 MB Video Memory, DRAM ¹	004120-001	171044-001	All
2 MB Video Memory, VRAM ⁵	004539-001	137895-001	All
2 MB Video Memory, WRAM ³		223339-001	4x4, 5x5
6 MB Video Memory, WRAM ³		223340-001	4x4, 5x5

¹ Cirrus Logic GD5434.

² QVision 1280P+.

³ Millennium Graphics Board.

⁴ 60ns EDO SIMMs are used as alternatives.

⁵ QVision 2000+.

Miscellaneous	Assembly	Spare Part	System
Backplane	003730-001	172622-001	3x3
Backplane	003733-001	172623-001	4x4
Backplane (HXS2, HXS4, HXS5)	003733-002	172623-002	4x4
Backplane	003736-001	172624-001	5x5
Backplane (HXW2, HXW3)	003736-002	172624-002	5x5
Speaker w/o Bracket		141336-001	5x5

Controller Boards	Assembly	Spare Part	System	Page
IDE Controller	002172-001	171745-001	All	X
6260 SCSI-2 Controller	004004-001	133880-001	All	A-6
Ethernet ISA Controller w/ Slot Bracket	003086-001	147220-001	All	X
QVision 2000+ Graphics, 2 MB	004111-001	137897-001	All	X
SCSI ISA, Plug and Play	184750-001	184751-001	All	X
Millennium, Graphics, 2 MB	005409-002	223337-001	4x4, 5x5	X

ProLinea 5133

Hard Drives	Type	Spare Part	System
535 MB SCSI	N/A	148286-001	All
540 MB, IDE	65	188666-001	All
630 MB	65	173114-001	All
720 MB, IDE	65	172842-001	All
840 MB, IDE	65	214211-001	All
1.05 GB SCSI	N/A	192799-001	All
1.08 GB, IDE, DFP	65	172941-001	All
2.1 GB, IDE	65	225521-001	All
2.1 GB Fast SCSI-2	N/A	142272-001	All

Tape Drives	Spare Part	System	Tape Cart.	Spare Part
340/680 MB w/ Compression	187658-001	All	340 MB	184299-001
			680 MB	184300-001
525 MB ACA	142073-201	All	525 MB	119504-001
4 GB TR4, IDE	294126-001		4 GB TR4	294140-001
5.0 GB DAT	142074-201	All	2.0 GB DAT	131148-001
			5.0 GB DDS2	199496-001

Diskette Drives	Spare Part	System
1.44 MB, 3-Mode	160788-201	5x5

28.8k-bps Modem

Country	Assembly	Spare Part	RJ-11 Phone Cable	Option
U.S.	223610-002	259214-002	127949-001	259213-001

Cables	Spare Part	System
CD-ROM/Hard Drive Cable	172478-001	4x4
	172481-001	5x5
Diskette Drive Cable	172797-001	4x4
	172480-001	5x5
2-Device SCSI, 3-Connector	146997-001	4x4, 5x5
Hard Drive Select Cable	172945-001	4x4, 5x5
LED Assembly	172531-001	4x4
	172530-001	5x5
Monitor ID Cable (asset control)	172482-001	4x4, 5x5
Adapter, AUI to BNC E/Net Transceiver, Ext.	192768-001	4x4, 5x5
2-Device SCSI, 3-Connector, Plug and Play	184118-001	4x4, 5x5


ROM Information	Spare Part	System
System ROMPaq	148218-001	All

Power Supply/Battery	Spare Part	System
Power Supply, 145 W	172765-001	4x4
Power Supply, 185 W	172838-001	5x5
Real-Time Clock Battery (4.5 V alkaline)	160274-001	3x3, 4x4, 5x5


ProLinea 5133

Memory Upgrade Chart

PROCESSOR BOARD
004939, 004940, 005900, 005901
(8 or 16 MB)

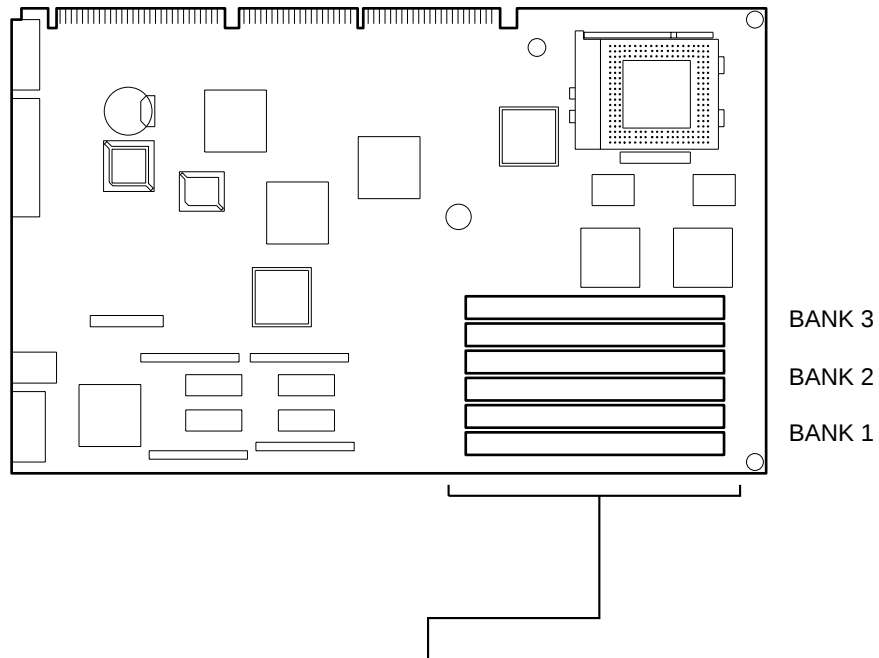

ADD MEMORY MODULES IN MATCHED PAIRS INTO BANKS 1,2 OR 3,
UP TO 192 MEGABYTES TOTAL SYSTEM MEMORY



4-MB FPM 70ns - OPTION PN 172712-001

8-MB FPM 70ns - OPTION PN 172713-001

16-MB FPM 70ns - OPTION PN 172714-001

32-MB FPM 70ns - OPTION PN 172715-001

8-MB EDO 70ns - OPTION PN 243011-001

16-MB EDO 70ns - OPTION PN 243012-001

32-MB EDO 70ns - OPTION PN 243013-001

64-MB EDO 70ns - OPTION PN 243014-001