
SCSI Hard Drive Configuration Charts



SCSI DEFINITIONS



PARK. The jumper option park applies when the jumper is present but not shorting the pins together. In other words, it is positioned off to one side of the pins.

KEY. The jumper option key applies when the pins on the hard drive are clipped off and no jumper can be placed in the position.

SCSI Hard Drive Configuration Charts

Drive Size: **18.2 GB**

Model: **BC01821938**

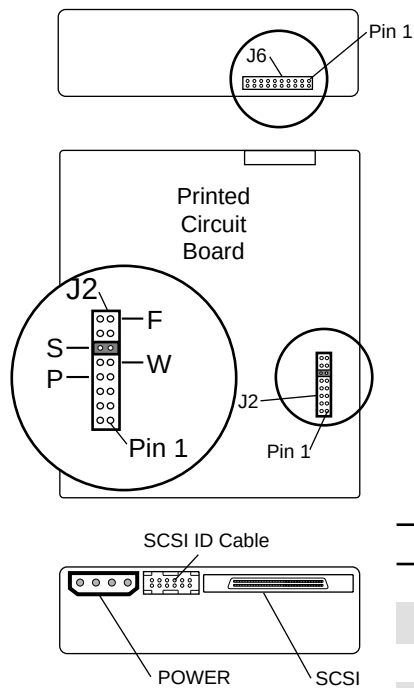

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
 ● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings



Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	○ ○

Key ○ ○ Jumper NOT Installed
 ● ● Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **18.2 GB**

Model: **BB01821AC3**

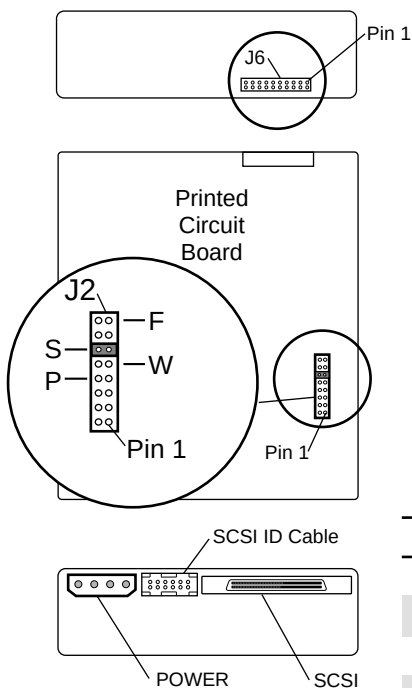

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings




Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **18.2 GB**

Model: **BB018222B8**

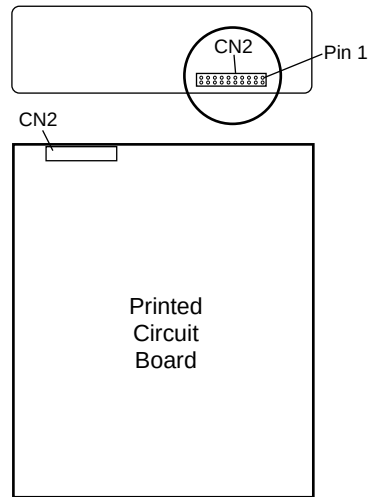

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	oo	oo	oo
1	oo	oo	oo
2	oo	oo	oo
3	oo	oo	oo
4	oo	oo	oo
5	oo	oo	oo
6	oo	oo	oo

Key oo Jumper NOT Installed
 Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.



Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	
P	Parity Enabled	oo
W	Write Protect Disabled	oo
F	Force Single-Ended Mode	oo

Key oo Jumper NOT Installed
 Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **18.2 GB** Model: **BD018222C1**

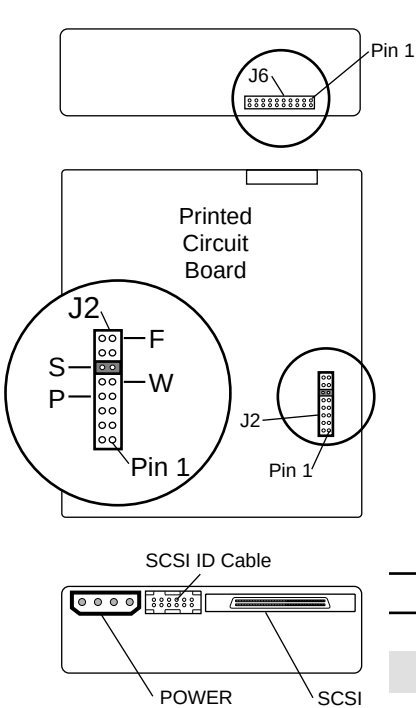

IMPORTANT:
This drive is intended for non-pluggable applications only. Migration to a Pluggable Drive Tray is not supported.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	■ ■
2	○ ○	■ ■	○ ○
3	○ ○	■ ■	■ ■
4	■ ■	○ ○	○ ○
5	■ ■	○ ○	■ ■
6	■ ■	■ ■	○ ○

Key ○ ○ Jumper NOT Installed
■ ■ Jumper Installed

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.

Default Settings


Signal	Description	Jumper
S	Start Unit Command Enabled	■ ■
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode Disabled	○ ○

Key ○ ○ Jumper NOT Installed
■ ■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **18.2 GB**

Model: **BD018222CA**

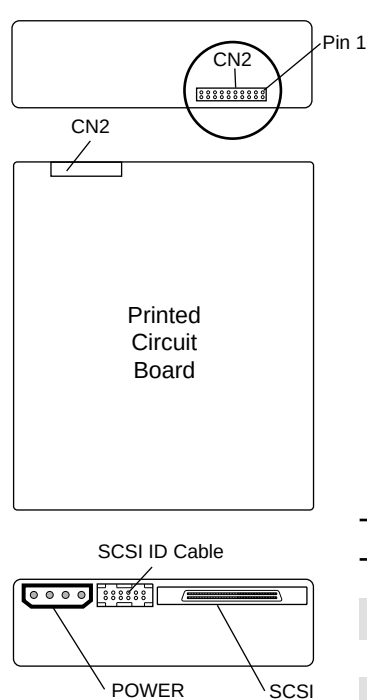

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
 ● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings



Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	○ ○

Key ○ ○ Jumper NOT Installed
 ● ● Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **18.2 GB**

Model: **HC01841729**

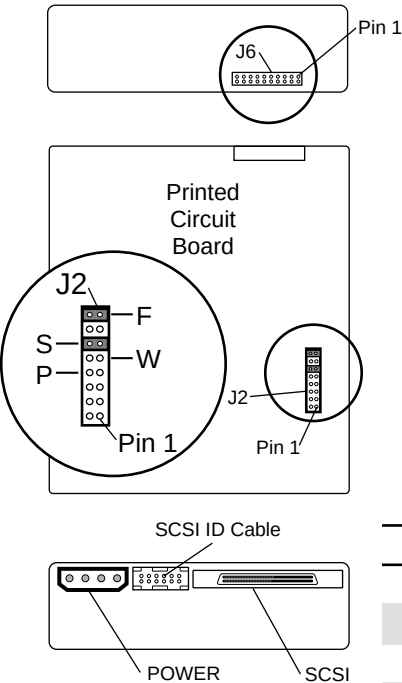

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.


Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	● ●



Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **9.1 GB** Model: **3391NS**



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

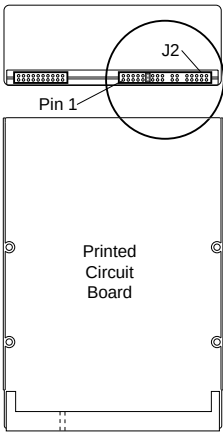

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.



Key ○ Jumper NOT Installed
■ Jumper Installed
** Not Configurable

Default Settings


Signal	Description	Jumper
S	Start Unit Command Enabled	■
	Parity Enabled**	n/a
W	Write Protect Disabled	○
X	Synch Data Transfer Enabled**	○

SCSI Hard Drive Configuration Charts

Drive Size: 9.1 GB **Model: 3391WS**



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

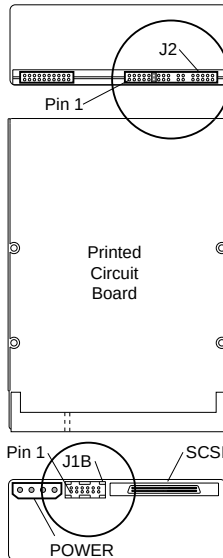

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	■
	Parity Enabled**	n/a
W	Write Protect Disabled	○
X	Synch Data Transfer Enabled**	○



NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
● Jumper Installed
** Not Configurable

Drive Size: **9.1 GB**

Model: **BB00921791**

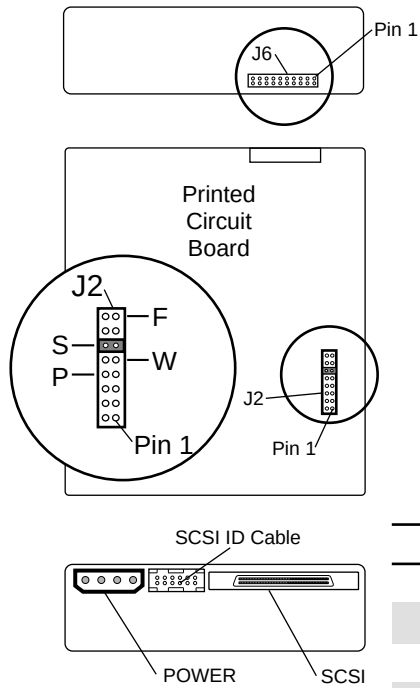

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed



SCSI Hard Drive Configuration Charts

Drive Size:

9.1 GB

Model:

BB00921B91

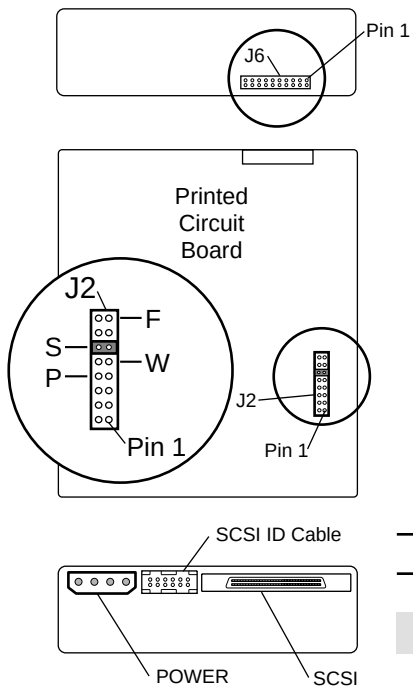

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings




Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **9.1 GB**

Model: **BB009222B5**

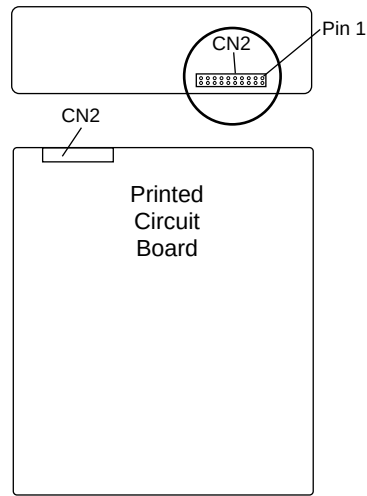

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	oo	oo	oo
1	oo	oo	oo
2	oo	oo	oo
3	oo	oo	oo
4	oo	oo	oo
5	oo	oo	oo
6	oo	oo	oo

Key oo Jumper NOT Installed
 Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	
P	Parity Enabled	oo
W	Write Protect Disabled	oo
F	Force Single-Ended Mode	oo

Key oo Jumper NOT Installed
 Jumper Installed



SCSI Hard Drive Configuration Charts

Drive Size:

9.1 GB

Model:

BD00921937

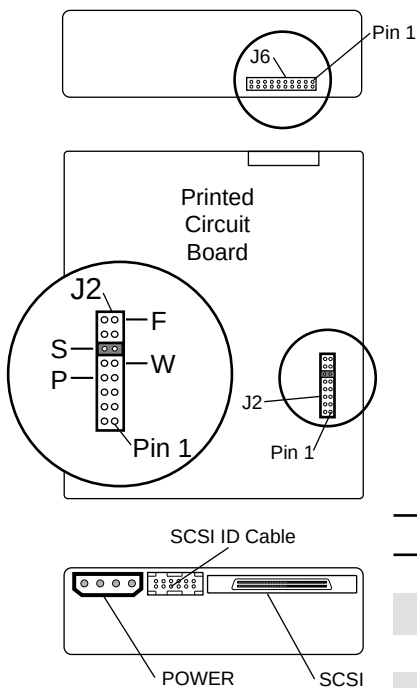

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○○	○○	○○
1	○○	○○	●●
2	○○	●●	○○
3	○○	●●	●●
4	●●	○○	○○
5	●●	○○	●●
6	●●	●●	○○

Key ○○ Jumper NOT Installed
●● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings


Signal	Description	Jumper
S	Start Unit Command Enabled	●●
P	Parity Enabled	○○
W	Write Protect Disabled	○○
F	Force Single-Ended Mode	○○

Key ○○ Jumper NOT Installed
●● Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **9.1 GB**

Model: **BD009222BB**

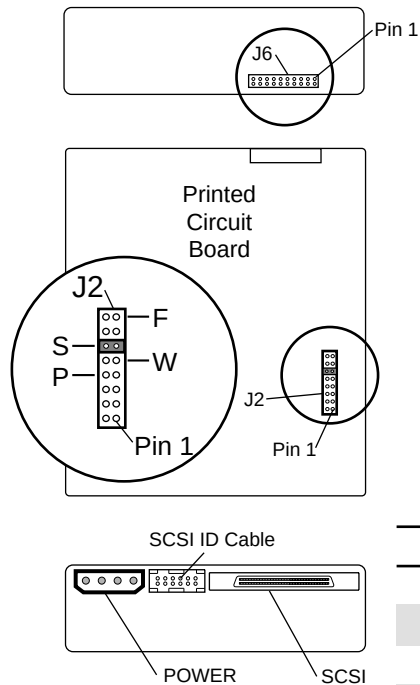

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
 ● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode Disabled	○ ○

Key ○ ○ Jumper NOT Installed
 ● ● Jumper Installed




SCSI Hard Drive Configuration Charts

Drive Size:

9.1 GB

Model:

BD009222C7

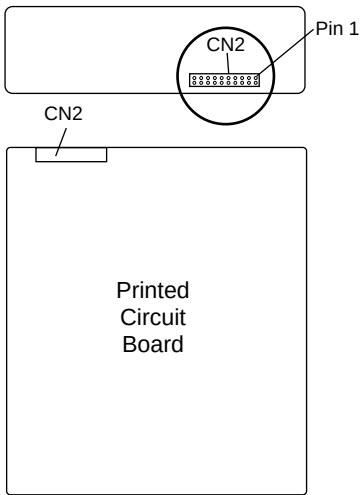

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	■ ■
2	○ ○	■ ■	○ ○
3	○ ○	■ ■	■ ■
4	■ ■	○ ○	○ ○
5	■ ■	○ ○	■ ■
6	■ ■	■ ■	○ ○

Key ○ ○ Jumper NOT Installed
■ ■ Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.



Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	■ ■
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	○ ○


Key ○ ○ Jumper NOT Installed
■ ■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **9.1 GB** Model: **DCHS09U**



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector.

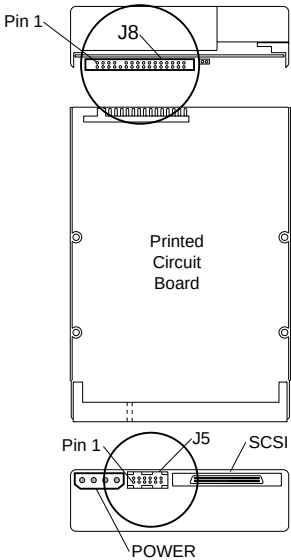

- NOTES:**
- 1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 - 2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
 ● Jumper Installed

SCSI ID Settings


SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Default Settings

Signal	Description	Jumper
S	Autostart Enable	○
P	Parity Disable	○
W	Write Protect Enable	○
X	Synch Data Transfer Disable	○

SCSI Hard Drive Configuration Charts

Drive Size: 9.1 GB **Model: DCHS09Z**

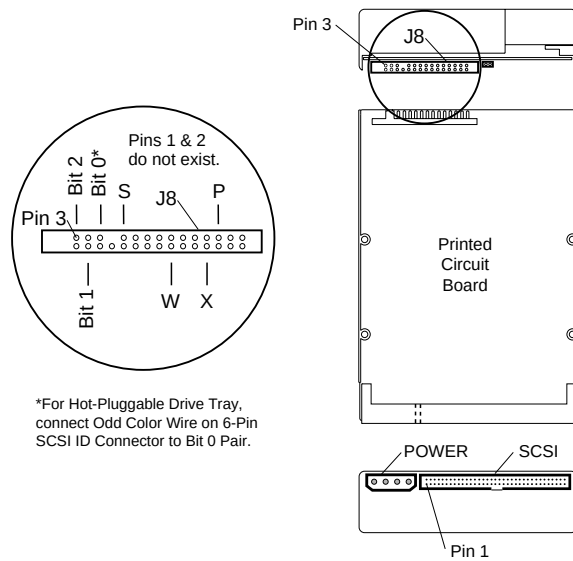

*For Hot-Pluggable Drive Tray, connect Odd Color Wire on 6-Pin SCSI ID Connector to Bit 0 Pair.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings



Signal	Description	Jumper
S	Autostart Enable	○
P	Parity Disable	○
W	Write Protect Enable	○
X	Synch Data Transfer Disable	○

Key ○ Jumper NOT Installed
■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **9.1 GB**

Model: **DDRS-39130**

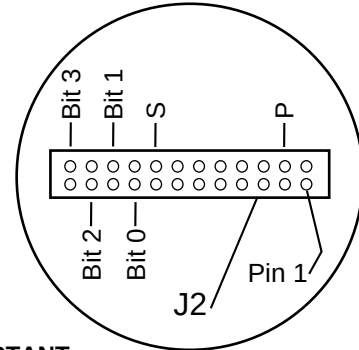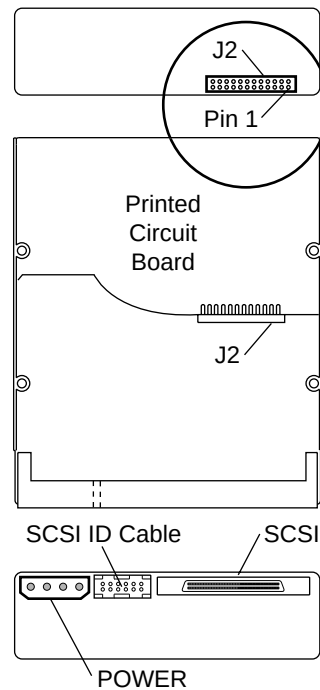

IMPORTANT:

This drive is intended for non-pluggable applications only. Migration to a Pluggable Drive Tray is not supported.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ Jumper NOT Installed
 ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	○ ○
P	Parity Enabled	○ ○
W	Write Protect Disabled	n/a
X	Synch Data Transfer Enabled	n/a



Key ○ Jumper NOT Installed
 ● Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size:

9.1 GB

Model: HD0094172B

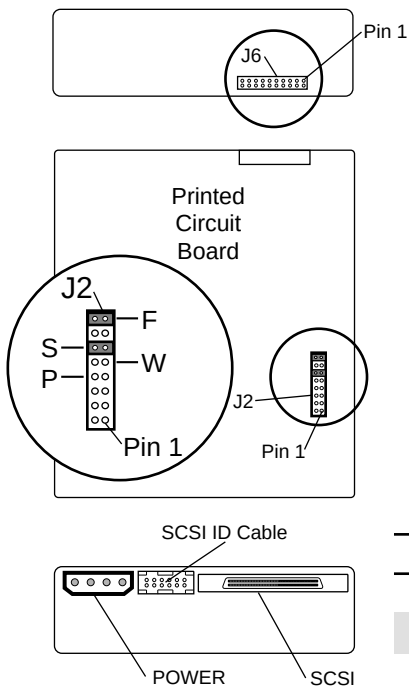

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	● ●

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed



SCSI Hard Drive Configuration Charts

Drive Size:

9.1GB

Model:

MAB3091SP

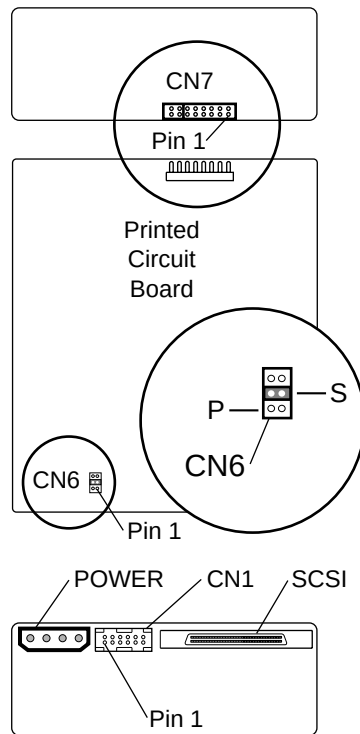

IMPORTANT:

This drive is intended for non-pluggable applications only. Migration to a Pluggable Drive Tray is not supported.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
	Synch Data Transfer Enabled	n/a


CN6 Default Settings

Pins	Description	Jumper
1-2	SCSI Termination Resistor	○ ○
3-4	Start Unit Command Enabled	● ●
5-6	Setting Terminator Power Supplied	○ ○

Key ○ Jumper NOT Installed
● Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: 9.1 GB **Model: ST19101W**

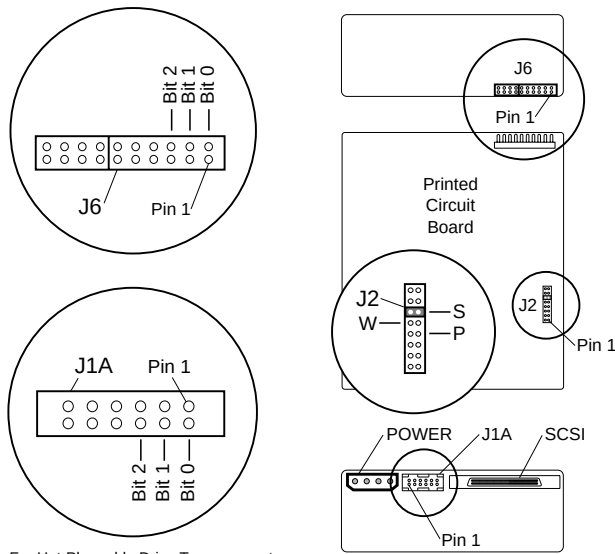

For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	■ ■
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
	Synch Data Transfer Enabled	n/a


NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
 ■ Jumper Installed
 ** Not Configurable

SCSI Hard Drive Configuration Charts

Drive Size: **9.1 GB** Model: **ST19171N**

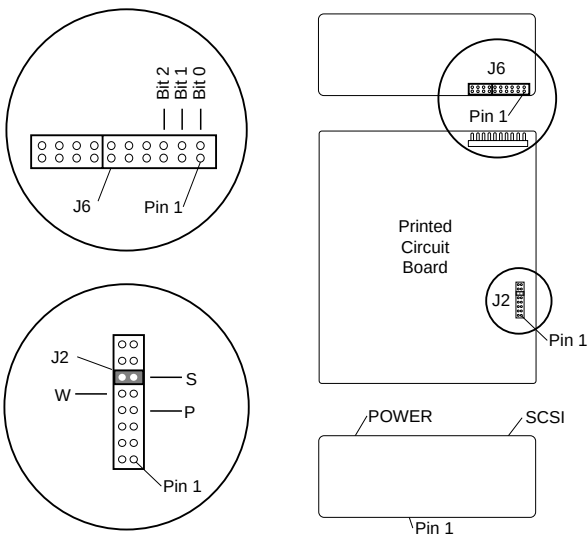

For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

- NOTES:**
- 1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 - 2. Termination default is disabled/removed.



Key ○ Jumper NOT Installed
 ● Jumper Installed

SCSI ID Settings


SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	●●
P	Parity Enabled	○○
W	Write Protect Disabled	○○
	Synch Data Transfer Enabled	n/a



For Pluggable Drive Tray, connect SCSI ID Cable to this Connector.

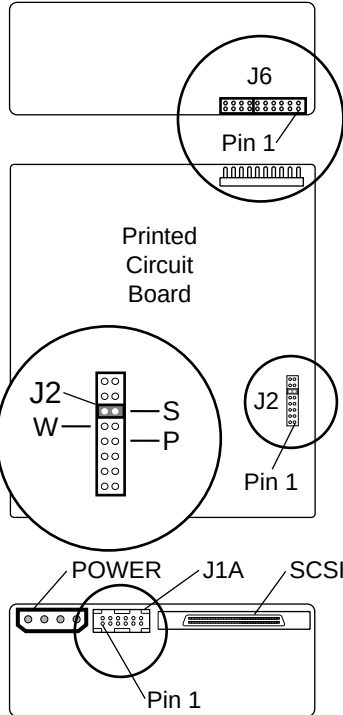

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

Default Settings


Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
	Synch Data Transfer Enabled	n/a

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

- NOTES:**
- All jumper and switch settings are shown in the factory default setting, including those not labeled.
 - Termination default is disabled/removed.

SCSI Hard Drive Configuration Charts

Drive Size: 9.1 GB Model: ST19171WS

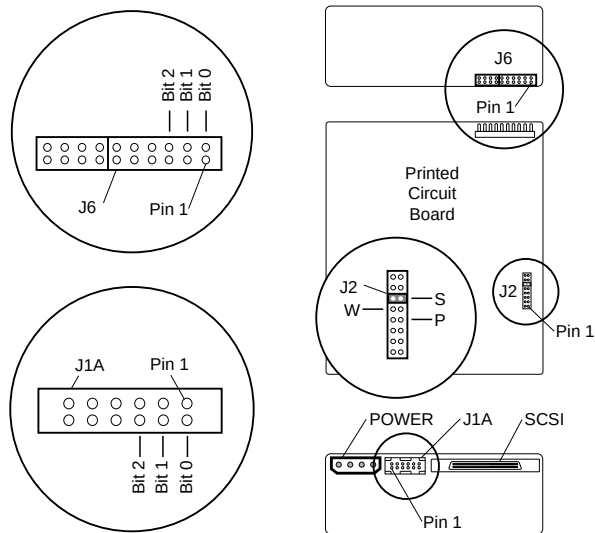

For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.


Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	■ ■
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
	Synch Data Transfer Enabled	n/a




Key ○ Jumper NOT Installed
■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: 4.3 GB Model: 4345NS



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector



SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.



Key ○ Jumper NOT Installed
■ Jumper Installed
** Not Configurable

Default Settings


Signal	Description	Jumper
S	Start Unit Command Enabled	■
	Parity Enabled**	n/a
W	Write Protect Disabled	○
X	Synch Data Transfer Enabled**	○

SCSI Hard Drive Configuration Charts

Drive Size: 4.3 GB **Model:** 4345WS



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

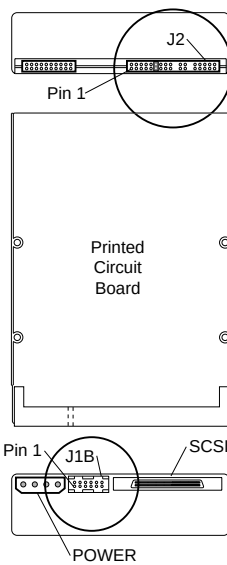

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	■
	Parity Enabled**	n/a
W	Write Protect Disabled	○
X	Synch Data Transfer Enabled**	○

Key ○ Jumper NOT Installed
■ Jumper Installed
** Not Configurable

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.



SCSI Hard Drive Configuration Charts

Drive Size:

4.3 GB

Model:

BB00421793

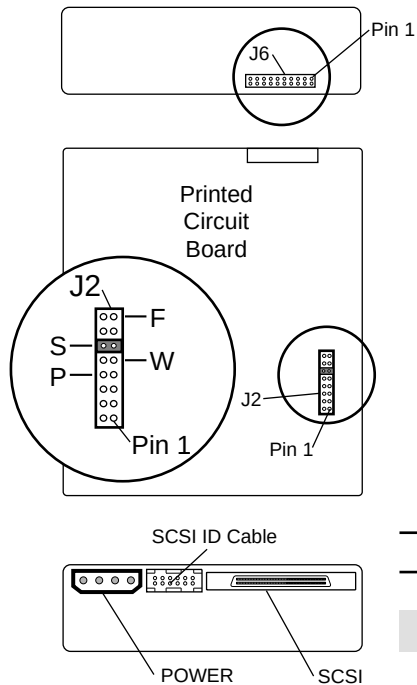

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed


SCSI Hard Drive Configuration Charts

Drive Size:

4.3 GB

Model:

BD00421936

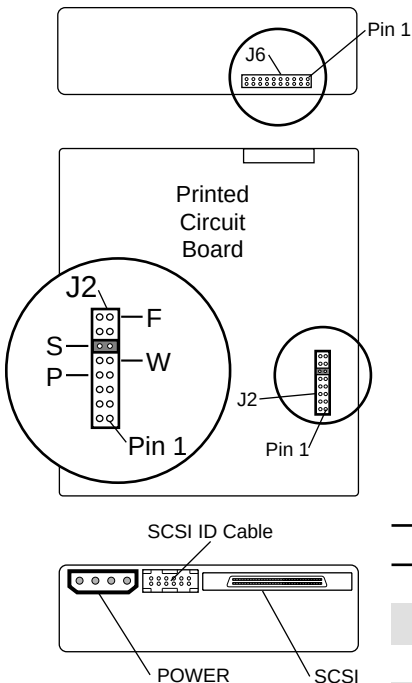

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.



Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	○ ○


Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **4.3 GB** Model: **DCHS04U**



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector.

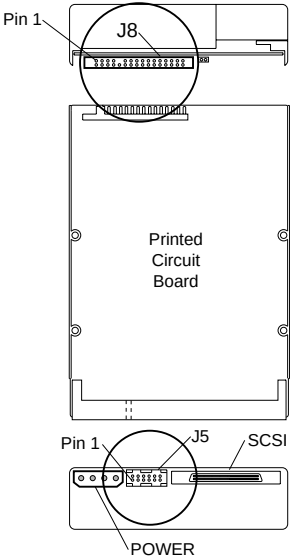

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
 ● Jumper Installed

SCSI ID Settings


SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Default Settings

Signal	Description	Jumper
S	Autostart Enable	○
P	Parity Disable	○
W	Write Protect Enable	○
X	Synch Data Transfer Disable	○

SCSI Hard Drive Configuration Charts

Drive Size: 4.3 GB **Model:** DCHS04Z

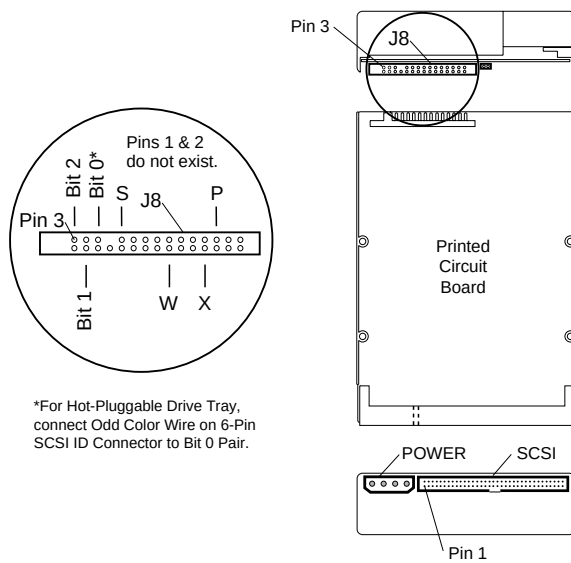

*For Hot-Pluggable Drive Tray, connect Odd Color Wire on 6-Pin SCSI ID Connector to Bit 0 Pair.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings


Signal	Description	Jumper
S	Autostart Enable	○
P	Parity Disable	○
W	Write Protect Enable	○
X	Synch Data Transfer Disable	○

Key ○ Jumper NOT Installed
■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: 4.3 GB

Model: DDRS-34560

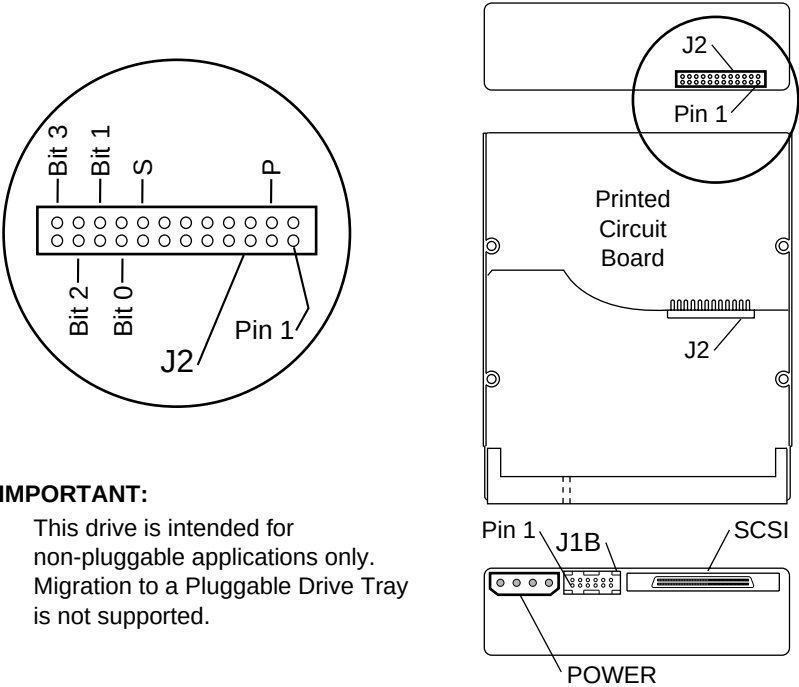

- NOTES:**
- 1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 - 2. Termination default is disabled/removed.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0			
1			
2			
3			
4			
5			
6			

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	
P	Parity Enabled	
W	Write Protect Disabled-	n/a
X	Synch Data Transfer Enabled	n/a



Key

Jumper NOT Installed

Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **4.3 GB** Model: **DFHSS4F**

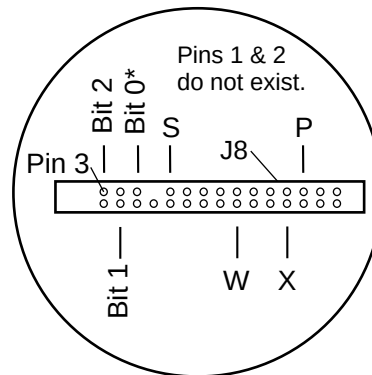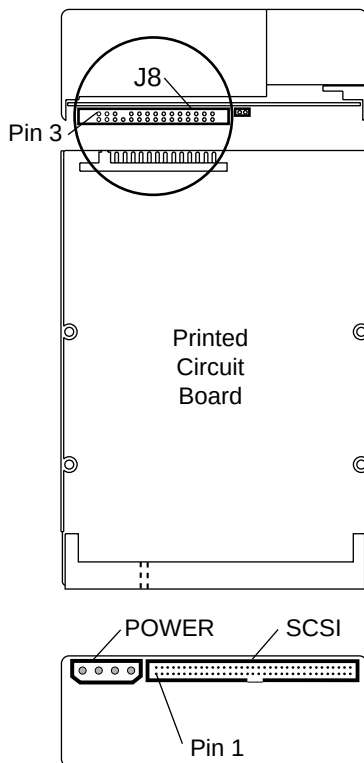

*For Pluggable Drive Tray, connect Odd Color Wire on 6-Pin SCSI ID Connector to Bit 0 Pair.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0			
1			
2			
3			
4			
5			
6			

Key Jumper NOT Installed
 Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings




Signal	Description	Jumper
S	Start Unit Command Enabled	
P	Parity Enabled	
W	Write Protect Disabled	
X	Synch Data Transfer Enabled	

Key Jumper NOT Installed
 Jumper Installed

SCSI Hard Drive Configuration Charts


Drive Size: **4.3 GB**

Model: **DFHSS4W**

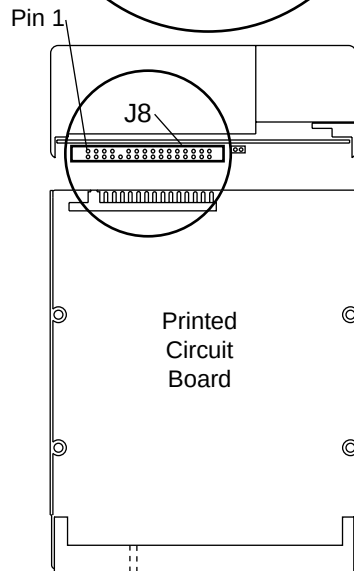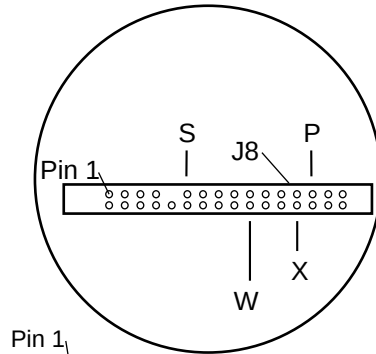

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.



For Pluggable Drive Tray, connect SCSI ID Cable to this Connector.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Key ○ Jumper NOT Installed
● Jumper Installed

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	○
P	Parity Enabled	○
W	Write Protect Disabled	○
X	Synch Data Transfer Enabled	○

Key ○ Jumper NOT Installed
● Jumper Installed



SCSI Hard Drive Configuration Charts

Drive Size:

4.3 GB

Model:

HD00441730

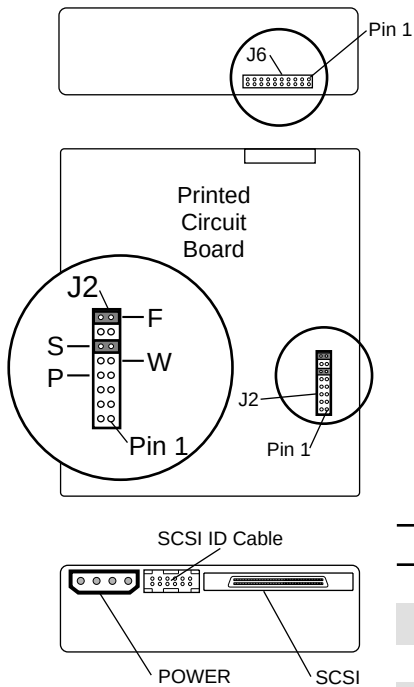

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	■ ■
2	○ ○	■ ■	○ ○
3	○ ○	■ ■	■ ■
4	■ ■	○ ○	○ ○
5	■ ■	○ ○	■ ■
6	■ ■	■ ■	○ ○

Key ○ ○ Jumper NOT Installed
● ■ Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings



Signal	Description	Jumper
S	Start Unit Command Enabled	■ ■
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
F	Force Single-Ended Mode	■ ■

Key ○ ○ Jumper NOT Installed
● ■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **4.3 GB**

Model: **MAB3045SP**

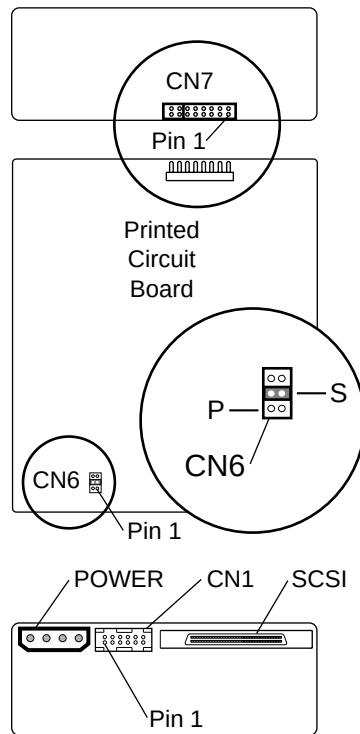

IMPORTANT:

This drive is intended for non-pluggable applications only. Migration to a Pluggable Drive Tray is not supported.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
	Synch Data Transfer Enabled	n/a

CN6 Default Settings



Pins	Description	Jumper
1-2	SCSI Termination Resistor	○ ○
3-4	Start Unit Command Enabled	● ●
5-6	Setting Terminator Power Supplied	○ ○

Key ○ Jumper NOT Installed
● Jumper Installed


SCSI Hard Drive Configuration Charts

Drive Size: **4.3 GB**

Model: **ST15150N**

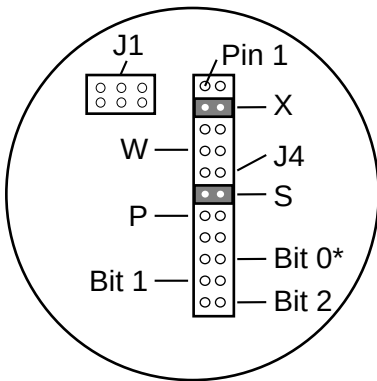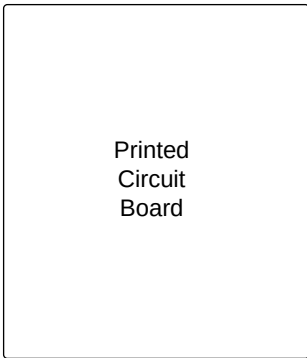

*For Pluggable Drive Tray, connect Odd Color Wire on 6-Pin SCSI ID Connector to Bit 0 Pair.



SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0			
1			
2			
3			
4			
5			
6			

Key Jumper NOT Installed
 Jumper Installed

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.

Default Settings



Signal	Description	Jumper
S	Start Unit Command Enabled	
P	Parity Enabled	
W	Write Protect Disabled	
X	Synch Data Transfer Enabled	

Key Jumper NOT Installed
 Jumper Installed



SCSI Hard Drive Configuration Charts

Drive Size: 4.3 GB

Model: ST15150W



For Pluggable Drive Tray, connect SCSI ID Cable to this Connector.

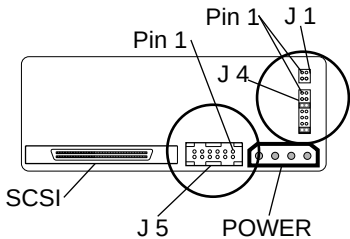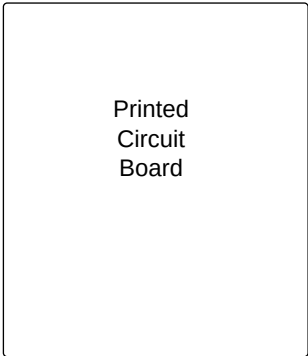

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

Default Settings


Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
X	Synch Data Transfer Enabled	● ●

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.

SCSI Hard Drive Configuration Charts

Drive Size: 4.3 GB **Model: ST34371N**

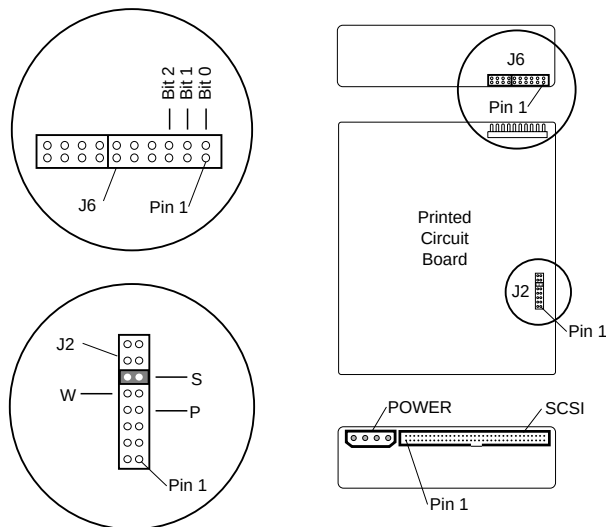

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
● Jumper Installed

SCSI ID Settings


SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	●●
P	Parity Enabled	○○
W	Write Protect Disabled	○○
	Synch Data Transfer Enabled	n/a

SCSI Hard Drive Configuration Charts

Drive Size: **4.3 GB** Model: **ST34371W**

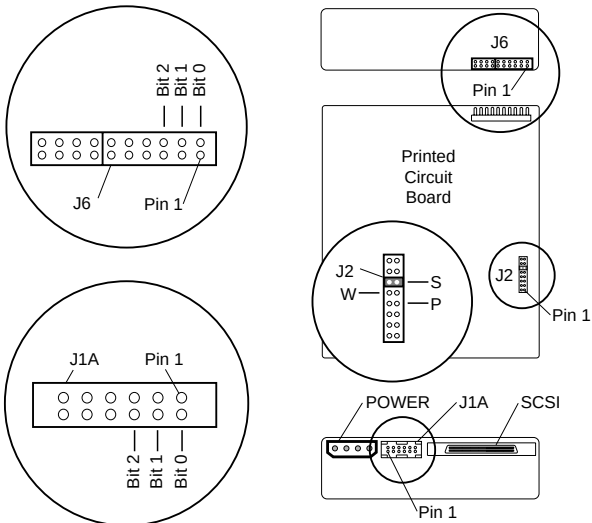

For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
● Jumper Installed

SCSI ID Settings



SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Default Settings




Signal	Description	Jumper
S	Start Unit Command Enabled	●●
P	Parity Enabled	○○
W	Write Protect Disabled	○○
	Synch Data Transfer Enabled	n/a

SCSI Hard Drive Configuration Charts

Drive Size: 4.3 GB **Model:** ST34501W



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector.



SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	■ ■
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○


NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **4.3 GB** Model: **ST34572N**

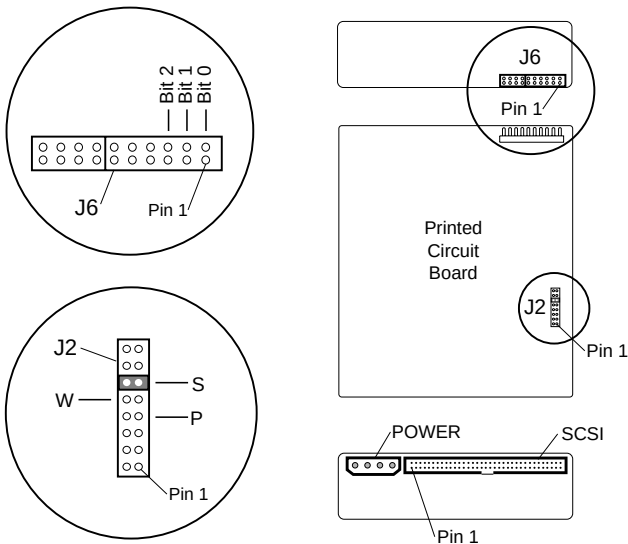

For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
● Jumper Installed

SCSI ID Settings


SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	●●
P	Parity Enabled	○○
W	Write Protect Disabled	○○
	Synch Data Transfer Enabled	n/a

SCSI Hard Drive Configuration Charts

Drive Size: **4.3 GB** Model: **ST34572W**

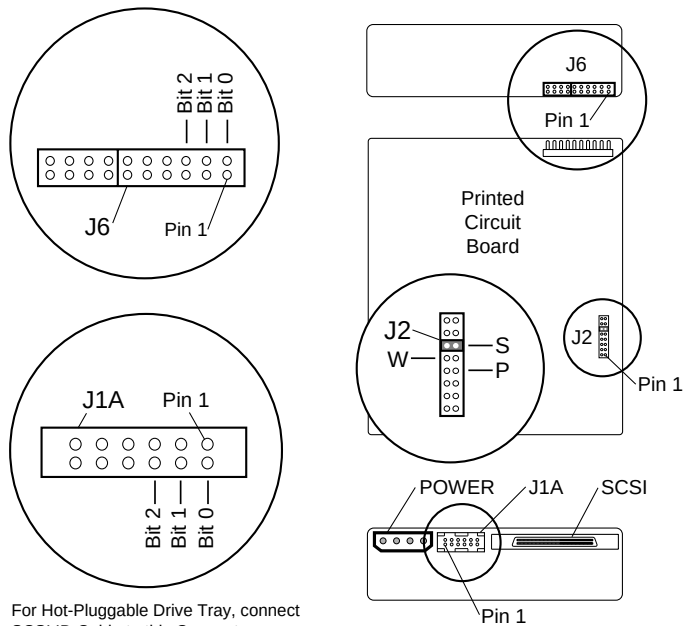

For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.


Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	■ ■
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
	Synch Data Transfer Enabled	n/a


Key ○ Jumper NOT Installed
■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **4.3 GB** Model: **WDE4360**



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

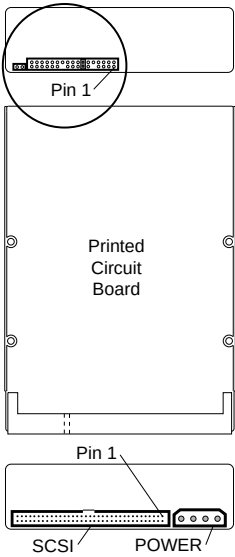

- NOTES:**
- 1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 - 2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
● Jumper Installed
** Not Configurable

SCSI ID Settings			
SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Default Settings		
Signal	Description	Jumper
S	Start Unit Command Enabled	●
	Parity Enabled**	n/a
W	Write Protect Disabled	n/a
X	Synch Data Transfer Enabled	○



SCSI Hard Drive Configuration Charts

Drive Size:


4.3 GB

Model:

XP34300W

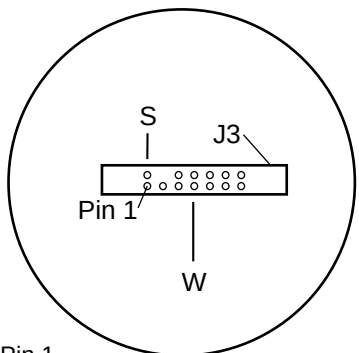

For Pluggable Drive Tray, connect SCSI ID Cable to this Connector.

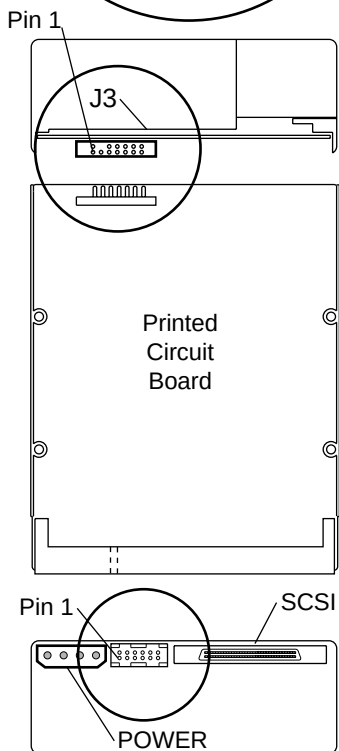

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ Jumper NOT Installed
● Jumper Installed

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	○
	Parity Enabled**	n/a
W	Write Protect Disabled	○
	Synch Data Transfer Enabled**	n/a


Key ○ Jumper NOT Installed ** Not Configurable
● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

SCSI Hard Drive Configuration Charts

Drive Size: **4.2 GB** Model: **CUDA**

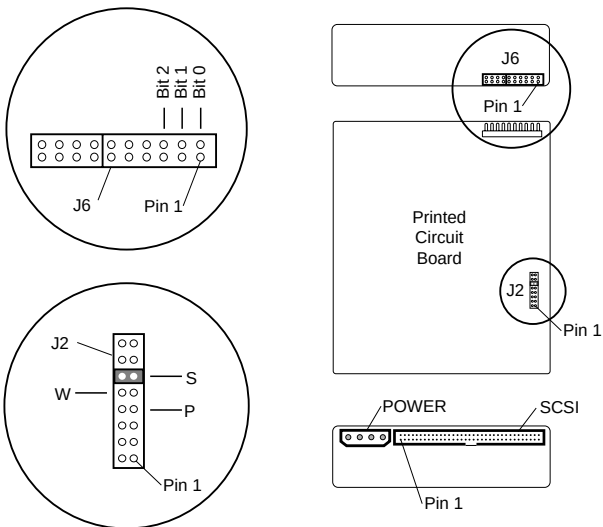

For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
● Jumper Installed

SCSI ID Settings


SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Default Settings


Signal	Description	Jumper
S	Start Unit Command Enabled	●●
P	Parity Enabled	○○
W	Write Protect Disabled	○○
	Synch Data Transfer Enabled	n/a

SCSI Hard Drive Configuration Charts

Drive Size: 2150 MB **Model: ORION**



IBM Drive
Assembly Number 247266



SCSI ID Settings


SCSI ID	Position #					
	6	5	4	3	2	1
0	○	○	○	○	○	○
1	○	○	■	○	○	○
2	○	○	○	■	○	○
3	○	○	■	■	○	○
4	○	○	○	○	■	○
5	○	○	■	○	■	○
6	○	○	○	■	■	○
7	○	○	■	■	■	○

Key ○ Jumper NOT Installed
■ Jumper Installed


SCSI Hard Drive Configuration Charts

Drive Size: **2.15 GB**

Model: **ST32155N**



Seagate Drive
Assembly Number 243019



SCSI ID Settings

SCSI ID	1-2	3-4	5-6	7-8	9-10	11-12
0						
1						
2						
3						
4						
5						
6						
7						

Key Jumper NOT Installed
 Jumper Installed



SCSI Hard Drive Configuration Charts

Drive Size:

2.1 GB

Model:

C2490A

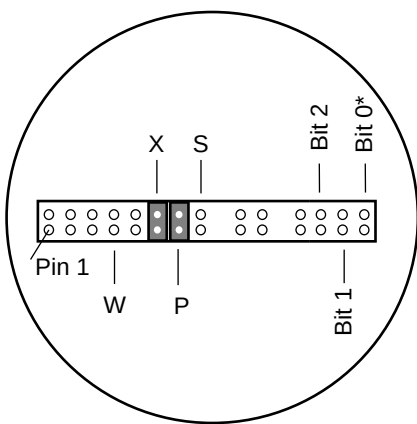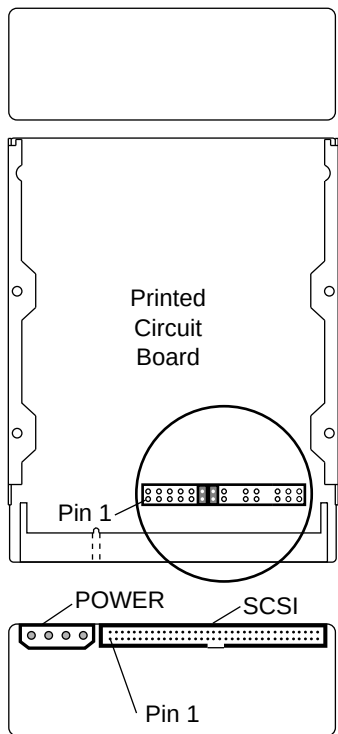

*For Pluggable Drive Tray, connect Odd Wire on 6-Pin SCSI ID Connector to Bit 0 Pair.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0			
1			
2			
3			
4			
5			
6			

Key Jumper NOT Installed
 Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Default Settings



Signal	Description	Jumper
S	Start Unit Command Enabled	
P	Parity Enabled	
W	Write Protect Disabled	
X	Synch Data Transfer Enabled	

Key Jumper NOT Installed
 Jumper Installed


SCSI Hard Drive Configuration Charts

Drive Size: **2.1 GB**

Model: **DFHSS2W**

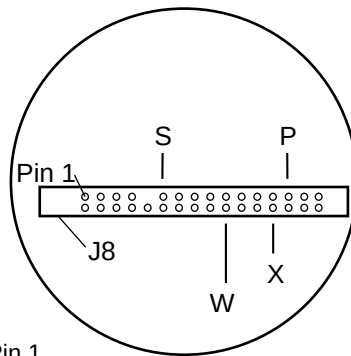

For Pluggable Drive Tray, connect SCSI ID Cable to this Connector.

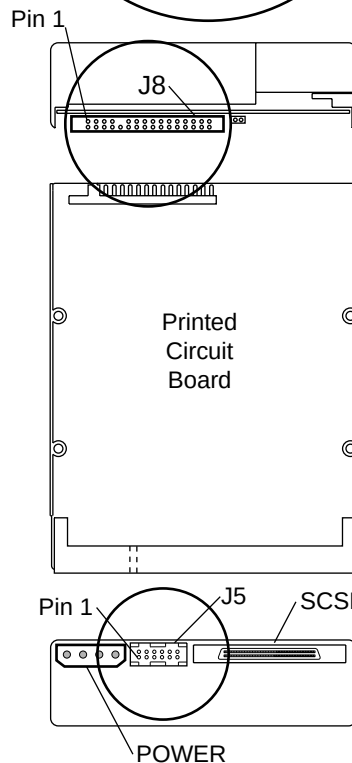

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Key ○ Jumper NOT Installed
 ● Jumper Installed

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	○
P	Parity Enabled	○
W	Write Protect Disabled	○
X	Synch Data Transfer Enabled	○




Key ○ Jumper NOT Installed
 ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

SCSI Hard Drive Configuration Charts

Drive Size: **2.1 GB** Model: **ST12550N**

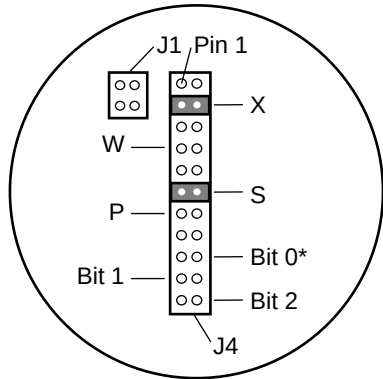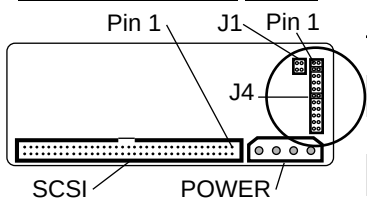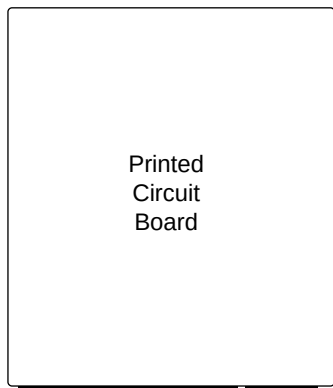

*For Pluggable Drive Tray, connect Odd Color Wire on 6-Pin SCSI ID Connector to Bit 0 Pair.

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0			
1			
2			
3			
4			
5			
6			

Key Jumper NOT Installed
 Jumper Installed

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.



Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	
P	Parity Enabled	
W	Write Protect Disabled	
X	Synch Data Transfer Enabled	


Key Jumper NOT Installed
 Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: 2.1 GB Model: ST32171N



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

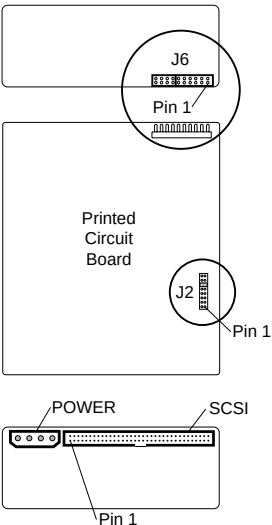

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0			
1			
2			
3			
4			
5			
6			

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.


Key Jumper NOT Installed
 Jumper Installed

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	
P	Parity Enabled	
W	Write Protect Disabled	
	Synch Data Transfer Enabled	n/a

SCSI Hard Drive Configuration Charts

Drive Size: 2.1 GB Model: ST32171W

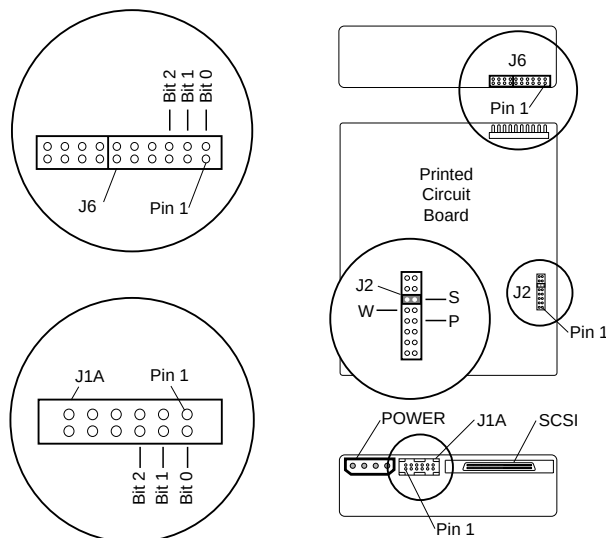

For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.


Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	■ ■
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
	Synch Data Transfer Enabled	n/a

Key ○ Jumper NOT Installed
■ Jumper Installed

SCSI Hard Drive Configuration Charts




Drive Size: **2.1 GB** Model: **ST32430N**



*For Hot-Pluggable Drive Tray, connect Odd Color Wire on 6-Pin SCSI ID Connector to Bit 0 Pair.

NOTES:

- 1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
- 2. Termination default is disabled/removed.

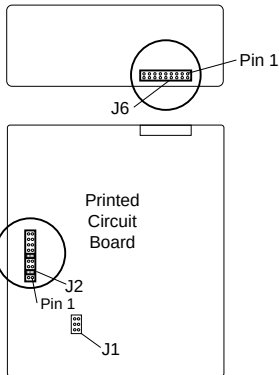

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○



Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	○
P	Parity Enabled	■
W	Write Protect Disabled	○
X	Synch Data Transfer Enabled	■




Key ○ Jumper NOT Installed
■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: **2.1 GB** Model: **ST32550N**



*For Pluggable Drive Tray, connect Odd Color Wire on 6-Pin SCSI ID Connector to Bit 0 Pair.

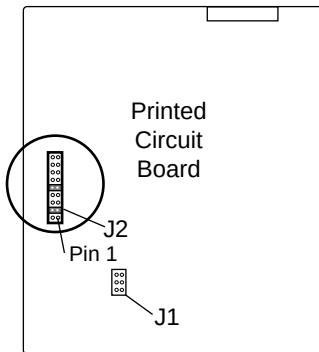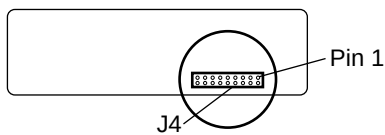

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
X	Synch Data Transfer Enabled	● ●

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed



NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.


SCSI Hard Drive Configuration Charts

Drive Size: **2.1 GB**

Model: **ST32550W**



For Pluggable Drive Tray, connect SCSI ID Cable to this Connector.

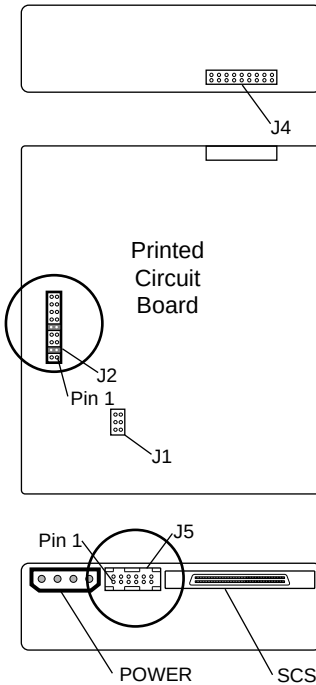

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○ ○	○ ○	○ ○
1	○ ○	○ ○	● ●
2	○ ○	● ●	○ ○
3	○ ○	● ●	● ●
4	● ●	○ ○	○ ○
5	● ●	○ ○	● ●
6	● ●	● ●	○ ○

Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	● ●
P	Parity Enabled	○ ○
W	Write Protect Disabled	○ ○
X	Synch Data Transfer Enabled	● ●


Key ○ ○ Jumper NOT Installed
● ● Jumper Installed

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

SCSI Hard Drive Configuration Charts

Drive Size: **2.1 GB** Model: **WDE2170**

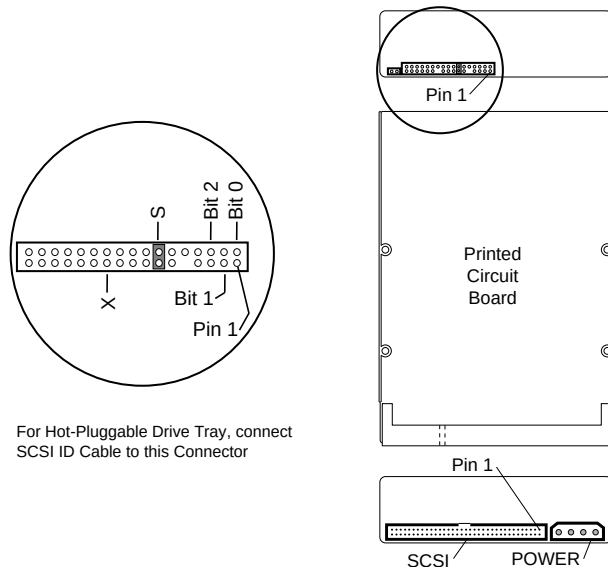

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

Key ○ Jumper NOT Installed
● Jumper Installed
** Not Configurable

SCSI ID Settings


SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	●
2	○	●	○
3	○	●	●
4	●	○	○
5	●	○	●
6	●	●	○

Default Settings


Signal	Description	Jumper
S	Start Unit Command Enabled	●
	Parity Enabled**	n/a
W	Write Protect Disabled	n/a
X	Synch Data Transfer Enabled	○

SCSI Hard Drive Configuration Charts


Drive Size: **2.1 GB** Model: **WDE2170W**



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector



For Hot-Pluggable Drive Tray, connect SCSI ID Cable to this Connector

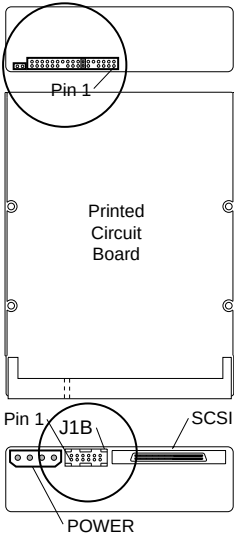

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○

NOTES:

- 1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
- 2. Termination default is disabled/removed.



Default Settings

Signal	Description	Jumper
S	Start Unit Command Enabled	■
	Parity Enabled**	n/a
W	Write Protect Disabled	n/a
X	Synch Data Transfer Enabled	○


Key ○ Jumper NOT Installed
■ Jumper Installed
** Not Configurable

SCSI Hard Drive Configuration Charts

Drive Size: **2.1 GB** Model: **XP32150W**

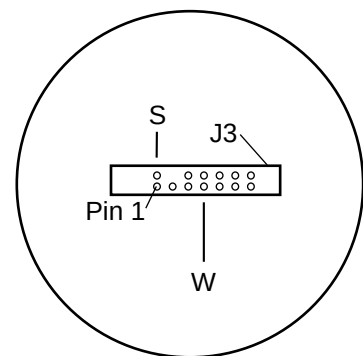

For Pluggable Drive Tray, connect SCSI ID Cable to this Connector.

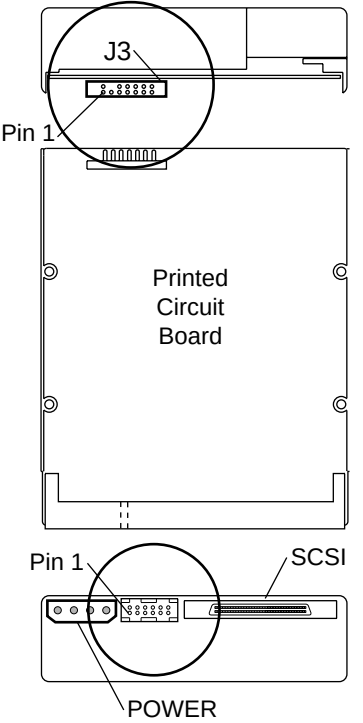

SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0			
1			
2			
3			
4			
5			
6			

Key Jumper NOT Installed
 Jumper Installed

Default Settings



Signal	Description	Jumper
S	Start Unit Command Enabled	
	Parity Enabled**	n/a
W	Write Protect Disabled	
	Synch Data Transfer Enabled**	n/a

Key Jumper NOT Installed **Not Configurable
 Jumper Installed

- NOTES:**
1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
 2. Termination default is disabled/removed.



SCSI Hard Drive Configuration Charts

Drive Size: 1080 MB **Model: ST31055N**

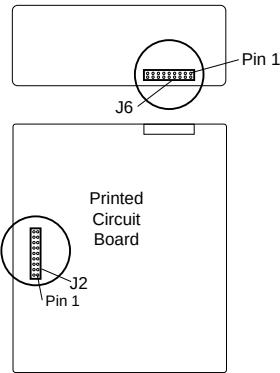

NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.



SCSI ID Settings

SCSI ID	Bit 2	Bit 1	Bit 0
0			
1			
2			
3			
4			
5			
6			

J2 Default Settings


Signal	Description	Jumper
S	Start Unit Command Enabled	
P	Parity Enabled	
W	Write Protect Disabled	

Key Jumper NOT Installed
 Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: 1.05 GB




Model: 640/1280S



*For Hot-Pluggable Drive Tray, connect Odd Color Wire on 6-Pin SCSI ID Connector to Bit 0 Pair.

NOTES:


1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.



SCSI ID Settings

SCSI ID	A2	A1	A0
0	○	○	○
1	○	○	■
2	○	■	○
3	○	■	■
4	■	○	○
5	■	○	■
6	■	■	○
7	■	■	■

Key ○ Jumper NOT Installed
■ Jumper Installed







Default Settings

SCSI ID	A2	A1	A0
6	■	■	○

Key ○ Jumper NOT Installed
■ Jumper Installed

SCSI Hard Drive Configuration Charts

Drive Size: 1.05 GB **Model: Fireball 1080**




NOTES:

1. All jumper and switch settings are shown in the factory default setting, including those not labeled.
2. Termination default is disabled/removed.

SCSI ID Settings

SCSI ID	A2	A1	A0
0			
1			
2			
3			
4			
5			
6			
7			

Key Jumper NOT Installed
 Jumper Installed



Default Settings

SCSI ID	A2	A1	A0
6			

Key Jumper NOT Installed
 Jumper Installed