

Deskpro XE

System Boards	Assembly	Spare Part
5/60 Processor Board	004069-001	142838-001 *
486 Processor Board w/o Chip	003008-011	194362-001** DISCONTINUED
486 DX4/100 Processor Board w/ Chip	003851-001	168718-001** DISCONTINUED

* Used with Pentium system only. 8 MB soldered.

** 4 MB soldered.

SW502 System Maintenance Configuration Settings (Assembly 003008-011, 003851-001, 004069-001)

Switch	Position	Status	
S1	ON	Disabled	Turns off integrated video controller.
	OFF *	Enabled	Enables the video controller.
S2	ON	Enabled	Locks the setup information. Cannot change configuration.
	OFF *	Disabled	Allows configuration changes.
S3	ON	Enabled	Sets the diskette drive for Read only.
	OFF *	Disabled	Allows read/write capability.
S4	OFF *	Disabled	Reserved. Switch remains in OFF position.
S5	ON	Enabled	Clears power-on password and administrator password.
	OFF *	Disabled	Allows power-on password and administrator password security feature.
S6	ON	Disabled	Flash ROM can be updated.
	OFF *	Enabled	Prevents Flash ROM updates.

* Default.

SW500 Processor Configuration Switch Settings (Assembly 003008-011)

Processor	S1	S2	S3	S4
486DX2/50	ON	OFF	ON	ON
486DX2/66	ON	OFF	ON	OFF
486DX4/100	ON	OFF	ON	OFF
486SX33	OFF	OFF	OFF	OFF

Upgrade Switch Settings

Processor	S1	S2	S3	S4
487SX/25	OFF	ON	ON	ON
486DX/33	ON	OFF	ON	OFF
486DX2/50	ON	OFF	ON	ON
486DX2/66	ON	OFF	ON	OFF
33/66 MHz	OFF	ON	ON	OFF
Intel Overdrive Processor*				
25/50 MHz	OFF	ON	ON	ON
Intel OverDrive Processor*				

* Includes the Pentium ODP.

E8 Battery Selection/clear CMOS (Assembly 003008-011, 003851-001)

Jumper	Function	Setting
E8	Internal Battery	1 - 2
	External Battery	2 - 3
	CMOS Erase	Open

Deskpro XE

E2 Battery Selection/clear CMOS (Assembly 004069-001)

Jumper	Function	Setting
E2	Internal Battery	1 - 2
	External Battery	2 - 3
	CMOS Erase	Open

Processor Locations

Processor Type	Location
486 (003008-011)	U1
Pentium (004069-001)	U1

Microprocessors	Spare Part
486DX2/50 Processor	194394-001 DISCONTINUED
486DX2/66 Processor	194395-001
486SX/33 Processor	194393-001 DISCONTINUED

Memory	Assembly	Spare Part
1 MB Memory Module	118666-002	118740-001
	118666-004**	DISCONTINUED
1 MB VRAM Module	002954	139168-001 DISCONTINUED
2 MB Memory Module	118667-002	113923-001 * DISCONTINUED
2 MB Memory Module	118667-004	141753-001 **
4 MB Memory Module	118665-002	118741-001 *
4 MB Memory Module	118665-004	141754-001 **
8 MB Memory Module	129041-001	128954-001 *
8 MB Memory Module	129041-002	141755-001 ***
16 MB Memory Module	137143-003	149947-001 ***
32 MB Memory Module	139973-002	149948-001 ***
64 KB Cache Module	002754	141477-001 DISCONTINUED
256 KB Cache Module	002748	142821-001 *** DISCONTINUED
256 Cache Module	003560	194380-001

* 80 ns.

** 70 ns.

*** Used with Pentium system only (70 ns).

Controller Boards	Assembly	Spare Part
6260 SCSI-2 Controller*	004004	146993-001
Ethernet 16TP Controller	003086-002	147220-001
QVision 1024/I Controller*	002948	148866-001
QVision 1280/I Controller*	002951	139182-001
SCSI, ISA, Plug and Play	184750-001	184751-001
Token Ring 16TR Controller	004063	142836-001 DISCONTINUED

* See Multiproduct Boards Appendix for settings.

Deskpro XE

Miscellaneous	Assembly	Spare Part
14.4 bps Fax/Modem**	193052-002	193080-001
Backplane	003323	194374-001 DISCONTINUED
Serial/Parallel Interface Board*	000570 000990	106886-001
SpeedPac 144/I Data and Fax Modem**	003002	147453-001

* See Multiproduct Boards Appendix for settings.

** See Modem Configuration Appendix for settings.

28.8k-bps Modem

Country	Assembly	Spare Part	RJ-11 Phone Cable
U.S.	223610-002	259214-002	127949-001

Diskette Drives	Spare Part
1.2 MB	DISCONTINUED
1.44 MB	147243-001 DISCONTINUED

Hard Drives	Type	Inter-leave	Inte-grated	Min ROM	Spare Part	Controller Assembly
170 MB	64	1:1	Y	092893	194367-001	
240 MB	1	1:1	Y	092893	129490-001 DISCONTINUED	N/A
270 MB	65	1:1	Y	092893	197441-001	
330 MB SCSI *	N/A	1:1	Y	092893	142037-001	004004
340 MB	63	1:1	Y	092893	199966-001	N/A
525 MB	42	1:1	Y	092893	197014-001	N/A
550 MB SCSI *	N/A	1:1	Y	092893	142038-001	004004
720 MB **						
1.05 GB SCSI *	N/A	1:1	Y	092893	192799-001	004004

* Used as Secondary Drive.

** Europe Only.

CD-ROM Drives	Spare Part
DualSpeed Internal	133881-001 (-002 outside North America)
DualSpeed External	133882-001 (-002 outside North America)
External Tray Load	199430-001
Internal Tray Load	142223-001

Tape Drives	Spare Part	Tape Cartridge	Spare Part
120-/250 MB * (1/2 height)	197490-001 DISCONTINUED	120 MB (DC2120)	116967-001
150-/250 MB	115220-001	150 MB (DC600XTD)	113234-001
		250 MB (DC6250)	115298-001
250-/500 MB	197022-001	320 MB (DC6320)	119505-001
		525 MB (DC6525)	119504-001
525 MB ACA	142073-001	525 MB (DAT)	119504-001
5.0 GB DAT	142074-001	1.3/3.3 GB (60 meters)	131167-001
		2.0/5.0 GB (90 meters)	131148-001

* With compression.

Deskpro XE

Cables	Used With	Spare Part
CD-ROM Audio	Tray Load Drive	194311-001
CD-ROM Data	Tray Load Drive	197842-001
Diskette Signal	1.44 Diskette	141186-001 DISCONTINUED
Hard Drive Signal	All Drives	141187-001 DISCONTINUED
LED Cable	System LED	141346-001
SCSI Signal 3-Connector		146997-001
VESA Connector	System Board Video	139166-001 DISCONTINUED

System ROM Information

Revision	Part Number	System
092893	142854-001	486-based
011294	194399-002	Pentium
ROMPaq (486 board assembly 003008-011)	194314-001	
ROMPaq (Pentium board assembly 004069-001)	142864-001	


Battery/Power Supply

	Spare Part
External Replacement Battery	160274-001
Power Supply (486-based systems)	194352-001 DISCONTINUED
Power Supply (Pentium system)	141337-001 (230 V) DISCONTINUED 137633-001 (115 V) DISCONTINUED


Deskpro XE

486-Based Models Memory Upgrade Chart

PROCESSOR BOARD
Assy # 003008-001

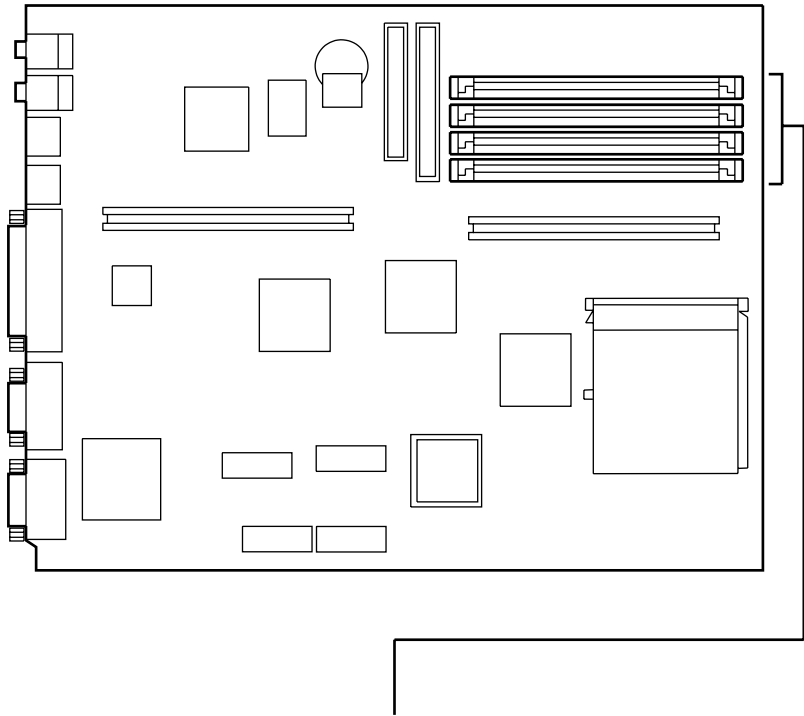

ADD ANY OF THE FOLLOWING
UP TO 32-MB TOTAL SYSTEM MEMORY



1-MB MEMORY MODULE (70/80ns) SPARE PN 118740-001

2-MB MEMORY MODULE (80ns) OPTION PN 118689-001

4-MB MEMORY MODULE (80ns) OPTION PN 118690-001

8-MB MEMORY MODULE (80ns) OPTION PN 128877-001


Deskpro XE

Pentium-Based Models Memory Upgrade Chart

PROCESSOR BOARD


Assy # 004069-001

8 MB

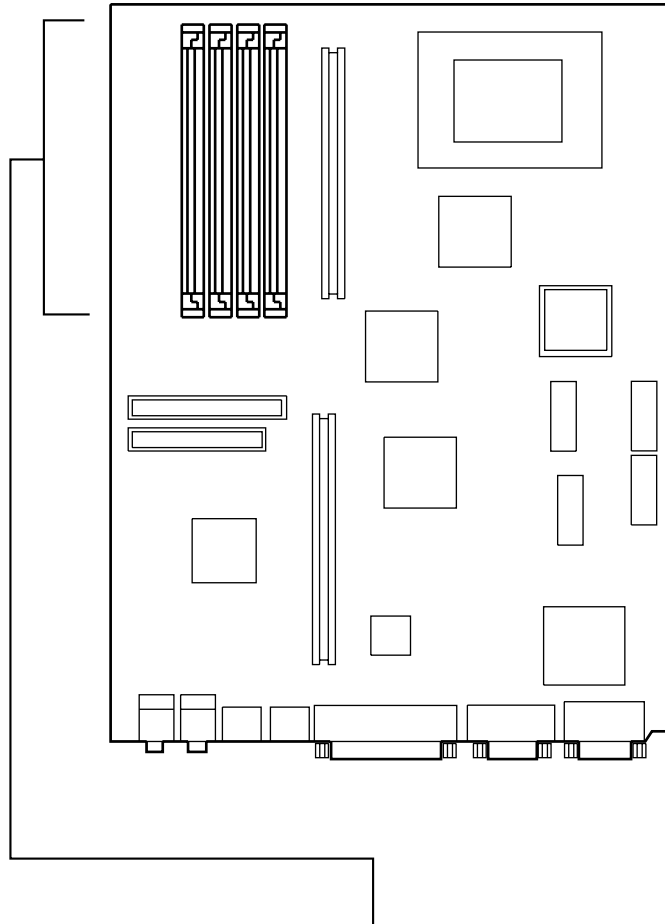

UP TO 136-MB TOTAL SYSTEM MEMORY

ADD 4 OF THE FOLLOWING
ALL FOUR MUST BE THE SAME SIZE



1-MB MEMORY MODULE (70/80ns) SPARE PN 118740-001

2-MB MEMORY MODULE (70ns) OPTION PN 141683-001

4-MB MEMORY MODULE (70ns) OPTION PN 141684-001

MEMORY KITS, EACH CONTAINING 4 MODULES

8-MB MEMORY KIT (70ns) OPTION PN 149911-001

16-MB MEMORY KIT (70ns) OPTION PN 149949-001

32-MB MEMORY KIT (70ns) OPTION PN 149912-001

64-MB MEMORY KIT (70ns) OPTION PN 149913-001

128-MB MEMORY KIT (70ns) OPTION PN 149914-001