

Deskpro 2000

System Boards	Assembly	Spare Part
System Board, DT w/ IO Panel (P54C)	005505-101	243048-001
System Board, DT w/ IO Panel (P55C/MMX)	006761-101	278747-001
System Board, MT w/ Tray (P54C)	005505-101	243099-001
System Board, MT w/ Tray (P55C/MMX)	006761-101	278799-001
System Board, DT w/ IO Panel (Pentium Pro)	005495-101	243049-001
System Board, MT w/ Tray (Pentium Pro)	005495-101	243111-001
System Board, DT w/ IO Panel (Pentium II)	006727-10X	278258-001
System Board, MT w/ Tray (Pentium II)	006727-10X	278259-001

Config. Jumpers, Pentium & Pentium Pro System Boards (005495, 005505)

Jumper	Function	Setting	Description
E9	Internal/External Battery		External Battery. Connect at header P3.
E6	Password Enable/Disable	5 – 6 6 – 7	Password Enabled Password Disabled
E8	Clear CMOS	1-2 2-3	NRM Clear, reinstall after 5 seconds

Config. Jumpers, Pentium II System Boards (006727)

Header	Function	Setting	Description
P2	Internal/External Battery		External Battery. Connect at header P2.
P2	Password Enable/Disable	5 – 6 6 – 7	Password Enabled Password Disabled
P2	Clear CMOS	1 – 2 2 – 3	NRM Clear, reinstall after 5 seconds

SW1, Speed Settings, Pentium System Boards (P54C, 005505)

BUS Proc. Speed (MHz)	S1	S2	S3	S4
66/100	OFF	ON	OFF	OFF
60/120	ON	OFF	ON	OFF
66/133	OFF	ON	ON	OFF
66/166	OFF	ON	ON	ON
66/200	OFF	ON	OFF	ON

SW1, Speed Settings, Pentium System Boards (P55C/MMX, 006761)

BUS Proc. Speed (MHz)	S1	S2	S3	S4
66/166	OFF	ON	ON	ON
66/200	OFF	ON	OFF	ON
66/233	OFF	OFF	OFF	OFF

SW1, Speed Settings, Pentium Pro System Boards (004595)

BUS Proc. Speed (MHz)	S1	S2	S3	S4	S5	S6
66/180	ON	OFF	ON	ON	OFF	ON
66/200	OFF	ON	ON	ON	OFF	ON

SW2, Speed Settings, Pentium II System Boards (006727)

BUS*/Proc. Speed (MHz)	S1	S2	S3	S4
66/233	ON	ON	OFF	OFF
66/266	ON	OFF	ON	ON
66/300	ON	OFF	ON	OFF

* Bus hard wired to 66 MHz.

Deskpro 2000

Configuration Code ¹	Assembly	System Board Spare Part	Form Factor
BK5B	006761-101	278747-001	DT
BK5C	006761-101	278747-001	DT
BK5F	006761-101	278747-001	DT
BK5G	006761-101	278747-001	DT
BK5H	006761-101	278747-001	DT
BK5J	006761-101	278747-001	DT
BK5K	006761-101	278747-001	DT
BK5L	006761-101	278747-001	DT
BK5M	006761-101	278747-001	DT
BK5N	006761-101	278747-001	DT
BK5P	006761-101	278747-001	DT
BK5Q	006761-101	278747-001	DT
BK52	006761-101	278747-001	DT
BK53	006761-101	278747-001	DT
BK54	006761-101	278747-001	DT
BK55	006761-101	278747-001	DT
BK56	006761-101	278747-001	DT
BK57	006761-101	278747-001	DT
BK58	006761-101	278747-001	DT
BK6B	006761-101	278747-001	DT
BK6C	006761-101	278747-001	DT
BK6D	006761-101	278747-001	DT
BK6F	006761-101	278747-001	DT
BK6G	006761-101	278747-001	DT
BK6H	006761-101	278747-001	DT
BK6J	006761-101	278747-001	DT
BK6K	006761-101	278747-001	DT
BK6L	006761-101	278747-001	DT
BK6N	006761-101	278747-001	DT
BK6P	006761-101	278747-001	DT
BK6Q	006761-101	278747-001	DT
BK62	006761-101	278747-001	DT
BK63	006761-101	278747-001	DT
BK64	006761-101	278747-001	DT
BK65	006761-101	278747-001	DT
BK67	006761-101	278747-001	DT
BK69	006761-101	278747-001	DT
BK7B	006761-101	278799-001	MT
BK72	006761-101	278799-001	MT
BK78	006761-101	278747-001	DT
BK82	006761-101	278799-001	MT
BMJB	006727-10X	278258-001	DT
BMJ2	006727-10X	278258-001	DT
BMK2	006727-10X	278258-001	DT
BMLB	006727-10X	278258-001	DT
BMLD	006727-10X	278258-001	DT
BML2	006727-10X	278258-001	DT
BMMB	006727-10X	278258-001	DT
BMMC	006727-10X	278258-001	DT
BMM2	006727-10X	278259-001	MT
BNTB	006761-101	278747-001	DT
BNTC	006761-101	278747-001	DT
BNTD	006761-101	278747-001	DT
BNTP	006761-101	278747-001	DT

Continued

Deskpro 2000

Configuration Code ¹	Assembly	System Board Spare Part	Form Factor
BNTQ	006761-101	278747-001	DT
BNT2	006761-101	278747-001	DT
BNT3	006761-101	278747-001	DT
BNT4	006761-101	278747-001	DT
BNT5	006761-101	278747-001	DT
BR32	006727-10X	278259-001	MT
BT82	006761-101	278747-001	DT
BWHB	005505-101	243048-001	DT
HVQ1 Russia Only	005505-101	243048-001	DT
HVQ2	005505-101	243048-001	DT
HVR3	005505-101	243048-001	DT
HVR5	005505-101	243048-001	DT
HVR6	005505-101	243048-001	DT
HVR7	005505-101	243048-001	DT
HVS3	005505-101	243048-001	DT
HVS4	005505-101	243048-001	DT
HVS5	005505-101	243048-001	DT
HVS6	005505-101	243048-001	DT
HVT2	005505-101	243048-001	DT
HVT3	005505-101	243048-001	DT
HVT4	005505-101	243048-001	DT
HVT5	005505-101	243048-001	DT
HVT6	005505-101	243048-001	DT
HVT7	005505-101	243048-001	DT
HVT8	005505-101	243048-001	DT
HVU2	005505-101	243048-001	DT
HVU3	005505-101	243048-001	DT
HVU4	005505-101	243048-001	DT
HVU5	005505-101	243048-001	DT
HVU6	005505-101	243048-001	DT
HVU7	005505-101	243048-001	DT
HVU8	005505-101	243048-001	DT
HVU9	005505-101	243048-001	DT
HWC2	005505-101	243048-001	DT
HWC3	005505-101	243048-001	DT
HWC4	005505-101	243048-001	DT
HWC6	005505-101	243048-001	DT
HWC8	005505-101	243048-001	DT
HVW2	005495-101	243049-001	DT
HVW3	005495-101	243049-001	DT
HVW4	005495-101 006730-101	243049-001	DT
HVW5	005495-101 006730-101	243049-001	DT
HVV4	005495-101 006730-101	243049-001	DT
HVV5	005495-101 006730-101	243049-001	DT

Continued

Deskpro 2000

Configuration Code ¹	Assembly	System Board Spare Part	Form Factor
HVV6	005495-101	243049-001	DT
HVV7	005495-101	243049-001	DT
HVV8	005495-101	243049-001	DT
HVX6	005505-101	243099-001	MT
HVX7	005505-101	243099-001	MT
HVY6	005505-101	243099-001	MT
HVY7	005505-101	243099-001	MT
HVY8	005505-101	243099-001	MT
HVY9	005505-101	243099-001	MT
HVZ6	005495-101	243111-001	MT
HVZ7	005495-101	243111-001	MT

¹ "H" codes are worldwide.

Microprocessors	Spare Part
P5/90*	287064-001
P5/100 (P54C)	213113-001
P5/120 (P54C)	213125-001
P5/133 (P54C)	243133-001
P5/166 (P54C)	235229-001
P5/200 (P54C)	243118-001
P6/180	234536-001
P6/200	210998-001
P5/166 (P55C/MMX)	240181-001
P5/200 (P55C/MMX)	240181-002
P5/233 (P55C/MMX)	286258-001
233/66, 512K, Pentium II	278262-001
266/66, 512K, Pentium II	278263-001
300/66, 512K, Pentium II	278289-001

* HVQ1 Configuration Code Only.

Memory	Assembly	Spare Part	System
4 MB SIMM, 60ns, EDO	185173-002	236512-001	P54C
8 MB SIMM, 60ns, EDO	185172-002	236513-001	P54C
16 MB SIMM, 60ns, EDO	185174-002	243115-001	P54C
32 MB SIMM, 60ns, EDO	185207-002	243116-001	P54C
16 MB DIMM, SDRAM	278030-002	278066-001	P55C, PII
32 MB DIMM, SDRAM	278031-002	278067-001	P55C, PII
Cache, 256K, DIMM	237716-001	243117-001	P54C models only
Cache, 256K, DIMM	237716-002	278017-001	P55C models only

Miscellaneous	Assembly	Spare Part	System
Backplane, DT Riser	005547-001	243056-001	DT (P54C)
Backplane, DT Riser	007090-001	278006-001	DT (P55C), PII
Backplane, MT Riser	005550-001	243057-001	MT (ALL)
Speaker w/ Bracket*	141045-001	172831-001	P54C, Pentium Pro
Speaker	247356-002	247508-001	P55C, PII
Mouse	141649-001	141189-401	All
Keyboard	166516-001	166514-001	P55C, PII
Power Switch Kit	172862-001	278054-001	P55C, PII
Microphone	278249-001	278266-001	P55C, PII

* Speaker supplied with enhanced audio kit 185430-001.

Deskpro 2000

CD-ROM Drive	Spare Part	System
CD-ROM, Internal, 8X, IDE	185916-201	P54C, Pentium Pro
CD-ROM, Internal, 16X, IDE	278791-001	P55C
CD-ROM, Internal, 24X	278026-001	PII

Controller Boards	Assembly	Spare Part	System
Millennium, Graphics, 2 MB	006443-001	243136-001	P6/200
Cirrus Logic 5446, 1 MB	247279-001	247425-001	P6/180
Audio Board	006047-001	247428-001	P54C
Audio Board	007175-001	278792-001	P55C, PII

Hard Drives	Spare Part	System
630 MB, IDE	173114-001	P54C, Pentium Pro
1.08 GB, IDE	243043-001	P54C, Pentium Pro
1.2 GB, IDE, 3.5"	244669-001	P54C, Pentium Pro
1.6 GB, IDE	247411-001	P54C, Pentium Pro
2.5 GB, IDE, 3.5"	247412-002	P54C, Pentium Pro
2.1 GB, IDE	278745-001	P55C
2.1 GB, UATA	278287-001	PII
3.2 GB, IDE	278746-001	P55C
3.2 GB, UATA	278288-001	PII
3.2 GB, UATA Performance	278297-001	PII

28.8k-bps Modem

Country	Assembly	Spare Part	RJ-11 Phone Cable	Option
U.S.	223610-002	259214-002	127949-001	259213-001

33.6k-bps Data/FAX Modem (All systems)

Country	Assembly	Spare Part	RJ-11 Phone Cable	Option
U.S.	295106-001	259214-002	127949-001	259213-002

Tape Drives	Spare Part	Tape Cartridge	Spare Part
340/680 MB	187658-001	340 MB	184299-001
with Compression		680 MB	184300-001
1.2 GB ACA*	199615-001	1.2 GB	199575-001
2/8 GB DAT	142074-201	2 GB 90mm	131148-001
4 GB TR4, IDE	294126-001	4 GB TR4	294140-001

* Minitower only.

Diskette Drives	Spare Part	System
1.44 MB, 3-Mode	160788-001	All

Cables	Spare Part	System
Diskette Cable	243084-001	All
Cable, IDE HD/CD-ROM	243085-001	All
2-Device SCSI, 3-Connector	146997-001	All
LED Assembly DT	243095-001	DT
LED Assembly MT	243110-001	MT
CD ROM Audio Cable	171109-001	All
Dual IDE	247568-001	P55C, PII
SCSI, 4-Pos	148259-001	P55C, PII
Dual Ultra ATA	278296-001	PII

Deskpro 2000

ROM Information	Spare Part	System
System ROMPaq	183986-001	All


Power Supply/Battery	Spare Part	System
Power Supply	242908-001	P54C
Power Supply *	242908-002	
Power Supply	278756-001	P55C, PII
Real-Time Clock Battery (4.5 V Alkaline)	160274-001	All

* HVQ1 Configuration Code Only.


Deskpro 2000

MEMORY UPGRADE CHART

I/O BOARD
005505-101,005495-101

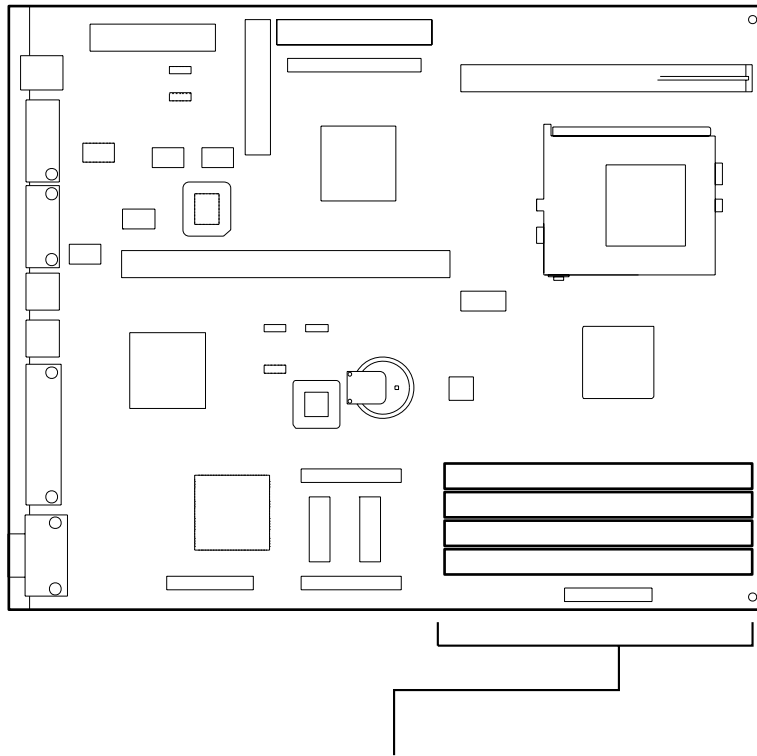

MAXIMUM SYSTEM MEMORY IS:
P5 (005505) 128 MB
P6 (005495) 192 MB





- 8-MB 60ns - OPTION PN 243011-002
- 16-MB 60ns - OPTION PN 243012-002
- 32-MB 60ns - OPTION PN 243013-002
- 64-MB 60ns - OPTION PN 243014-002

Deskpro 2000


MEMORY UPGRADE CHART

I/O BOARD

16 MB EDO (006761-101, 006727-10X)

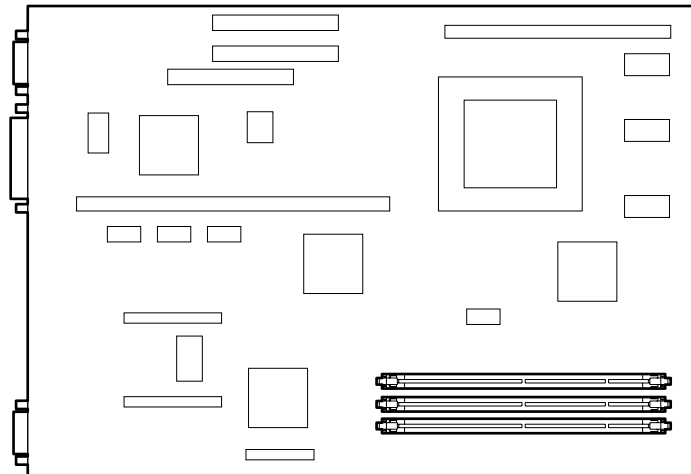

A MAXIMUM OF 384 MB TOTAL MEMORY



8-MB SDRAM 66MHz DIMMS - OPTION PN 242802-B21

16-MB SDRAM 66MHz DIMMS - OPTION PN 242803-B21

32-MB SDRAM 66MHz DIMMS - OPTION PN 242804-B21

64-MB SDRAM 66MHz DIMMS - OPTION PN 242805-B21

128-MB SDRAM 66MHz DIMMS - OPTION PN 242812-B21