

Deskpro 575

System Boards	Assembly	Spare Part	System
System Board, QVMX, AM ² , w/o Processor	003771-101 ¹	172611-001	3x3 ³ , 4x4 ⁴
System Board, QVMX, AM, ENET, w/o Processor	003768-101 ¹	172610-001	3x3, 4x4
System Board, AM, ENET, w/o Processor	004912-101	214873-001	3x3
System Board, QVMX, AM, w/o Processor	003771-101 ¹	172613-001	5x5 ⁵
System Board, QVMX, AM, ENET, w/o Processor	003768-101 ¹	172612-001	5x5
System Board, PCI, AM, ENET, w/o Processor	003774-101 ¹	172020-001	4x4
System Board, PCI, AM, ENET, w/o Processor	003774-101 ¹	172615-001	5x5
Sys Bd, PCI, AM, ENET, w/o Proc	004936-101	173241-001	4x4
Sys Bd, PCI, AM, ENET, w/o Proc	004936-101	173242-001	5x5
Sys Bd, DRAM, AM, ENET, w/o Proc	005897-101 ⁶	251556-001	4x4, 3x3

¹ Spare system boards ship without memory. Memory must be transferred from old board. Memory must be installed in pairs (use two 4 MB SIMMs for 8 MB memory or two 8 MB SIMMs for 16 MB).

² AM = Asset Management ³ 3x3 = 3 bay, 3 slot form factor

⁴ 4x4 = 4 bay, 4 slot form factor ⁵ 5x5 = 5 bay, 5 slot form factor

⁶ Uses EDO and FPM SIMMs

Configuration Jumpers, Pentium System Boards (003768, 003771, 003774, 004912, 004936, 005897)

Jumper	Function	Setting	Description
E5	Internal/External Battery	1 - 2 2 - 3	Internal (on-board) Battery External Battery. Connect at header P3.
E6	Password Enable/Disable	1 - 2 2 - 3	Password Enabled Password Disabled

SW1, Speed Settings, Pentium System Boards (003768², 003771², 003774², 004912, 004936, 005897)

BUS Proc. Speed (MHz)	S1	S2	S3	S4
50/125	ON	ON	OFF	ON
50/100	ON	ON	OFF	OFF
50/75	ON	OFF	OFF	OFF
66/133	OFF	ON	ON	OFF
60/120	OFF	ON	OFF	OFF
66/100	OFF	OFF	ON	OFF
60/90, 50/90	OFF	OFF	OFF	OFF
60/150 ¹	OFF	ON	OFF	ON
66/166 ¹	OFF	ON	ON	ON

¹ 005897 system board only

² System boards with a 2-position switch use columns S1 and S2 only.

Deskpro 575

Configuration Code *	Assembly	System Board Spare Part	Form Factor
HWT2 ¹	005897-101	251556-001	3x3
HMW1	003768-101	172610-001	3x3
HMW2	003768-101	172610-001	3x3
HMW3	003771-101	172611-001	3x3
HMW4	003768-101	172610-001	3x3
HMW5	003771-101	172611-001	3x3
HMW6	003768-101	172610-001	3x3
HMW7	003768-101	172610-001	3x3
HMW8	004912-101	214873-001	3x3
HMW9 **	003768-101	172610-001	3x3
GMW2	003768-101	172610-001	3x3
GMW3	003771-101	172611-001	3x3
GMW4	003768-101	172610-001	3x3
GMW5	003771-101	172611-001	3x3
GMW6	003768-101	172610-001	3x3
GMW7	003768-101	172610-001	3x3
HMX1	003768-101	172610-001	4x4
HMX2	003768-101	172610-001	4x4
HMX3	003771-101	172611-001	4x4
HMX4	003768-101	172610-001	4x4
HMX5	003771-101	172611-001	4x4
HMX6	003768-101	172610-001	4x4
HMX7***	003774-101	172020-001	4x4
HMX7***	004936-101	173241-001	4X4
HMX8	003768-101	172610-001	4x4
GMX2	003768-101	172610-001	4x4
GMX3	003771-101	172611-001	4x4
GMX4	003768-101	172610-001	4x4
GMX5	003771-101	172611-001	4x4
GMX6	003768-101	172610-001	4x4
GMX7***	003774-101	172020-001	4x4
GMX7***	004936-101	173241-001	4X4
GMX8	003768-101	172610-001	4x4
HMY1	003768-101	172612-001	5x5
HMY2	003768-101	172612-001	5x5
HMY3	003771-101	172613-001	5x5
HMY4	003768-101	172612-001	5x5
HMY5***	003774-101	172615-001	5x5
HMY5***	004936-101	173242-001	5x5
HMY6	003768-101	172612-001	5x5
HMY7	003768-101	172612-001	5x5
GMY2	003768-101	172612-001	5x5
GMY3	003771-101	172613-001	5x5
GMY4	003768-101	172612-001	5x5
GMY5***	004936-101	173242-001	5x5
GMY5***	003774-101	172615-001	5x5

¹ Use EDO or FPM SIMMs

Continued

Deskpro 575

Configuration Code *	Assembly	System Board Spare Part	Form Factor
GMV6	003768-101	172612-001	5x5
GMV7	003768-101	172612-001	5x5
HSY2	003768-101	172612-001	5x5
HSY3***	003774-101	172615-001	5x5
HSY3***	004936-101	173242-001	5x5
HSY4***	003774-101	172615-001	5x5
HSY4***	004936-101	173242-001	5x5
GSY2	003768-101	172612-001	5x5
GSY3***	003774-101	172615-001	5x5
GSY3***	004936-101	173242-001	5x5
GSY4***	003774-101	172615-001	5x5
GSY4***	004936-101	173242-001	5x5
HSJ2	003768-101	172610-001	4x4
HSJ3***	003774-101	172020-001	4x4
HSJ3***	004936-101	173241-001	4x4
HSJ4	003768-101	172610-001	4x4
HSJ5	004912-101	214873-001	4x4
GSJ2	003768-101	172610-001	4x4
GSJ3	003774-101	172020-001	4x4
GSJ3***	004936-101	173241-001	4x4
GSJ4	003768-101	172610-001	4x4
GSJ5	004912-101	214873-001	4x4
HWY2	005897-101	251556-001	4x4

* "G" codes are European models. "H" codes are worldwide.

** Europe and APD only.

*** Must use assembly number AND configuration code to order spare.

Microprocessors	Spare Part	System
P54C75	213112-001	3x3, 4x4, 5x5

Memory	Assembly	Spare Part	System
4 MB FPM SIMM, 70ns	172707-002	172718-001	All
8 MB FPM SIMM, 70ns	172707-003	172719-001	All
16 MB FPM SIMM, 70ns	172707-004	172938-001	All
32 MB FPM SIMM, 70ns	172707-005	172939-001	All
4 MB EDO SIMM, 70ns ³	185173-001	236656-001	All
8 MB EDO SIMM, 70ns ³	185172-001	236657-001	All
16 MB EDO SIMM, 70ns	185174-001	251577-001	All
32 MB EDO SIMM, 70ns	185207-001	251578-001	All
1 MB Video Memory, VRAM ¹	003971-001	172467-001	3x3, 4x4, 5x5
2 MB Video Memory, VRAM ⁴	004539-001	137895-001	4x4, 5x5
2 MB Video Memory, WRAM ²		223339-001	4x4, 5x5
6 MB Video Memory, WRAM ²		223340-001	4x4, 5x5

¹ QVision 1280P+ ² Millennium Graphics Board

³ 60ns EDO SIMMs are used as alternatives

⁴ QVision 2000+

Deskpro 575

Miscellaneous	Assembly	Spare Part	System
Backplane	003730-001	172622-001	3x3
Backplane	003733-001	172623-001	4x4
Backplane (HWY2)	003733-002	172623-002	4x4
Backplane	003736-001	172624-001	5x5
Speaker w/o Bracket	141045-001	141336-001	3x3, 4x4
Speaker w/ Bracket	141045-001	172831-001	5x5
WSS Feature Card	004198-001	172078-001	4x4, 5x5

Controller Boards	Assembly	Spare Part	System	Page
IDE Controller	002172-001	171745-001	3x3, 4x4, 5x5	X
Token Ring Controller w/ Cable & Bracket		172194-001	3x3, 4x4, 5x5	X
Token Ring Controller w/o Cable & Bracket		172885-001	3x3, 4x4, 5x5	X
6260 SCSI-2 Controller	004004-001	133880-001	3x3, 4x4, 5x5	A-6
Ethernet ISA Controller w/ Slot Bracket	003086-001	147220-001	3x3, 4x4, 5x5	X
QVision 2000+ Graphics, 2 MB	004111-001	137897-001	4x4, 5x5	X
SCSI ISA, Plug and Play	184750-001	184751-001	4x4, 5x5	X
Millenium Graphics, 2 MB	005409-002	223337-001	4x4, 5x5	X

CD-ROM Drive	Spare Part	System
CD-ROM, Internal, Quad Speed, IDE	172717-001	3x3, 4x4, 5x5
CD-ROM, 16X, IDE, Slot Load, 5.25", Half Height	278791-001	All

Hard Drives	Type	Spare Part	System
270 MB, IDE, DFP*	65/66	172778-001	3x3
420 MB, IDE	65	172780-001	3x3, 4x4, 5x5
535 MB SCSI	N/A	148286-001	3x3, 4x4, 5x5
540 MB, DFP	65	188666-001	3x3, 4x4, 5x5
720 MB	65	172842-001	4x4, 5x5
840 MB, IDE	65	214211-001	3x3, 4x4
1.08 GB, IDE, DFP	65	172941-001	3x3, 4x4, 5x5
1.05 GB SCSI	N/A	192799-001	3x3, 4x4, 5x5
2.1 GB fast SCSI-2	N/A	142272-001	3x3, 4x4, 5x5

* DFP = Drive Fault Prediction.

Tape Drives	Spare Part	System	Tape Cart.	Spare Part
340/680 MB w/ Comp	187658-001	3x3, 4x4, 5x5	340 MB 680 MB	184299-001 184300-001
525 MB ACA	142073-201	3x3, 4x4, 5x5	525 MB	119504-001
4 GB TR4, IDE	294126-001		4 GB TR4	294140-001
5.0 GB DAT	142074-201	3x3, 4x4, 5x5	2.0 GB DAT 5.0 GB DDS2	131148-001 199496-001

Deskpro 575

Diskette Drives	Spare Part	System
1.44 MB, 3-Mode	160788-201	3x3, 4x4, 5x5

SpeedPac 144/I Internal FAX/Modem

Country	Assembly	Spare Part	System	Page
U.S.	003002-001	147453-001	3x3, 4x4, 5x5	D-5

28.8k-bps Modem

Country	Assembly	Spare Part	RJ-11 Phone Cable	Option
U.S.	223610-002	259214-002	127949-001	259213-001

Cables

Cables	Spare Part	System
Kit: IDE CD-ROM/HD Cable (2); Audio Cables (2)	172478-001	3x3, 4x4
CD-ROM/HD Cable	172481-001	5x5
Diskette Drive Cable (3x3)	172477-001	3x3
Diskette Drive Cable (4x4)	172797-001	4x4
Diskette Drive Cable (5x5)	172480-001	5x5
2-Device SCSI, 3-Connector	146997-001	3x3, 4x4, 5x5
Hard Drive Select Cable	172945-001	3x3, 4x4, 5x5
LED Assembly	172531-001	3x3, 4x4
LED Assembly	141346-001	5x5
Monitor ID Cable (asset control)	172482-001	3x3, 4x4, 5x5
Token Ring Cable	172844-001	3x3, 4x4, 5x5
Adapter, AUI to BNC E/Net Transceiver, External	192768-001	3x3, 4x4, 5x5
2-Device, 3-Connector, Plug and Play	184118-001	3x3, 4x4, 5x5

ROM Information

ROM Information	Spare Part	System
System ROMPac	148218-001	3x3, 4x4, 5x5


Power Supply/Battery

Power Supply/Battery	Spare Part	System
Power Supply, 145 W, US	172765-001	3x3, 4x4
Power Supply, 145 W, PFC, Outside US	172766-001	3x3, 4x4
Power Supply, 185 W	172838-001	5x5
Power Supply, 185 W, PFC	172839-001	5x5
Real-Time Clock Battery (4.5 V Alkaline)	160274-001	3x3, 4x4, 5x5


Deskpro 575

Memory Upgrade Chart

PROCESSOR BOARD
003768/003771/003774/004912 (FPM only)
005897 (EDO or FPM)
(8 or 16 MB)

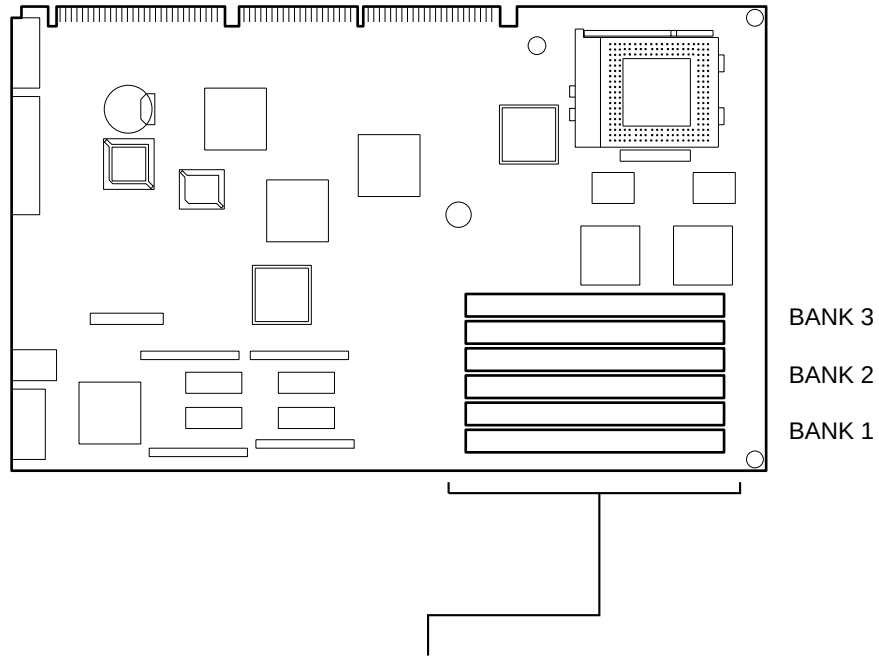

ADD MEMORY MODULES IN MATCHED PAIRS INTO
BANKS 1,2 OR 3, UP TO 192 MEGABYTES TOTAL SYSTEM MEMORY



4-MB FPM 70ns - OPTION PN 172712-001

8-MB FPM 70ns - OPTION PN 172713-001

16-MB FPM 70ns - OPTION PN 172714-001

32-MB FPM 70ns - OPTION PN 172715-001

8-MB EDO 70ns - OPTION PN 243011-001

16-MB EDO 70ns - OPTION PN 243012-001

32-MB EDO 70ns - OPTION PN 243013-001

64-MB EDO 70ns - OPTION PN 243014-001

NOTE: 60ns EDO SIMMS ARE USED AS ALTERNATIVES