

DESKPRO 286N

System Boards	Assembly	Spare Part
80286 System Board	001448	118738-001

System Board Switch Settings (001448)

Switch	Setting	Function
SW1-1	ON*	Enable Integrated VGA
SW1-1	OFF	Disable Integrated VGA
SW1-2	ON*	Enable SETUP
SW1-2	OFF	Disable SETUP
SW1-3	ON*	Enable external boot
SW1-3	OFF	Disable external boot
SW1-4	ON*	Enable power-on password
SW1-4	OFF	Disable power-on password
SW1-5	ON*	8-MHz 80287 coprocessor or coprocessor not installed
SW1-5	OFF	12-MHz 80C287 coprocessor
SW1-6	ON*	Enable diskette write
SW1-6	OFF	Disable diskette write

* Default.

Memory Boards	Assembly	Spare Part
Memory Expansion Board	001457	118739-001
4 MB Memory Module	137930-001 137930-002	137965-001
1 MB Memory Module	118666-001	113911-001

Miscellaneous	Assembly	Spare Part
Serial/Parallel Interface Board *	000570	106886-001
Serial/Parallel Interface Board *	000990	106886-001
2400-Baud Internal Modem	001070	Not Available
Backplane Board	001451	118742-001
9600/2400 Fax Modem **		197458-001

* See Volume 2 Appendix, Multiproduct Boards, for settings.

** See Volume 2 Appendix, Modem Configuration Information.

Hard Drives

Size	Type	Inter-leave	Inte-grated	Minimum ROM	Spare Part
20 MB	2	1:1	Y	032690	Not Available
40 MB	22	1:1	Y	032690	Not Available
40 MB	17	1:1	Y	032690	Not Available
60 MB	55	1:1	Y	032690	Not Available
84 MB	27	1:1	Y	032690	Not Available
120 MB	50	1:1	Y	032690	113962-001 ¹ 111910-001 ²

¹ Except Europe.

² Europe only.

Diskette Drives	Spare Part
1.2 MB	112566-001
1.44 MB	113958-001
Diskette Drive Adapter Kit	118686-001

DESKPRO 286N

Cables	Used With	Spare Part
Diskette Signal Cable	1.2 MB Diskette	113938-001
Diskette Power Cable	1.2 MB Diskette and Hard Drives	113939-001
Diskette Signal/Power Cable	1.44 MB Diskette	113930-001
Mass Storage Power Cable	All Hard Drives	113927-001
Mass Storage Signal Cable	All Hard Drives	113928-001
Serial Diagnostic Cable	Remote Unit	118773-001

Fan Jumper	Function
E1 - 1 to E1 - 2	Full
E1 - 2 to E1 - 3	Auto

Processor/Coprocessor	Location
Processor (80286-12)	Not field replaceable
Coprocessor (80287-8 or 80C287-12)	U60

System ROM Information	Location
	U81


System ROM Revisions (Spare Part 118756-001)

Revision	Number on ROM
032690	118717-002
040590	118717-003
042590	118717-004
050390	118717-005
080290	118717-006
031991	118717-007


Power Supply/Battery	Spare Part
Power Supply	118743-001
Battery/Clock Module	107872-001

DESKPRO 286N


Memory Upgrade Chart

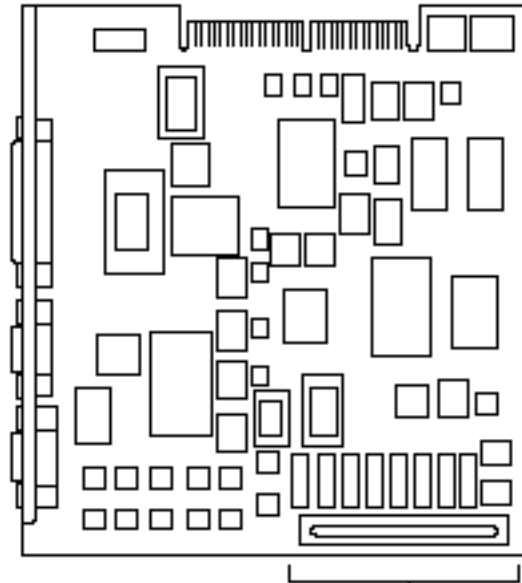

MEMORY EXPANSION BOARD
SPARE PN 118739-001

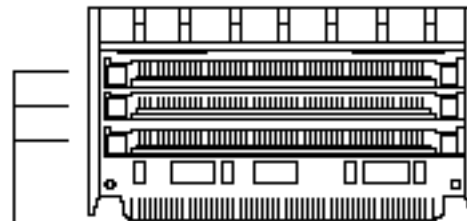

1-MB MEMORY MODULE
SPARE PN 113911-001



4-MB MEMORY MODULE
OPTION PN 137935-001

INSTALL MEMORY MODULES IN ANY COMBINATION
AND IN ANY ORDER ON THE MEMORY EXPANSION BOARD

INSTALL MEMORY EXPANSION BOARD ON SYSTEM BOARD

MAXIMUM MEMORY: 13 MEGABYTES