

Presario 5500

System Boards	Assembly	Spare Part
System Board, P586, w/ MPEG Down*	004797-101	214249-001
System Board, P586, w/o MPEG Down**	004794-101	214107-001
* 5522, 5526, 5528, 5536	** 5524, 5530, 5534	

Jumper Settings (Assembly 004794, 004797)

Jumper	Function	Pins	Description
P1	CMOS Clear	1-2 (default) Open	Secure CMOS Power Remove jumper for 10 seconds. Reinstall to clear CMOS
P2	CPU Clock Multiplier	A1-A2 B1-B2	1.5x
		A2-A3 B1-B2	2.0x
		A2-A3 B2-B3	2.5x
		A1-A2 B2-B3	3.0x
P3	Bus Speed Select	1-2	50 MHz CPU Ext. Bus Freq.
		2-3	40 MHz CPU Ext. Bus Freq.
		3-4	60 MHz CPU Ext. Bus Freq.
		4-5	66 MHz CPU Ext. Bus Freq.

Memory SIMMs	Spare Part
Video Memory	213859-001

Microprocessor	Spare Part
P586/75 *	172760-003
P586/90 **	172760-002
* 5522, 5524, 5526, 5528	** 5530, 5534, 5536

Miscellaneous Internal	Assembly	Spare Part
Monitor Assembly, NA, POL*		214137-001
Monitor Assembly, S/H		214137-003
Monitor Assembly, N/H, CE		214137-004
MPEG Controller		213857-001
WaveTable Controller		213858-001
Speaker Assembly		214345-001
Logo Kit **		214338-001
Backplane	004215-001	214109-001

* POL = Polished Glass.

** Order when the monitor is replaced.

Hard Drives	Cable Select*	Spare Part
630 MB	Yes	214209-001
840 MB	Yes	214211-001
1.05 GB	Yes	214213-001

* "Hard Drive Select" cable required.

CD-ROM Drives	Assembly	Spare Part
CD-ROM, IDE, 4 speed	172854-001	172864-301

Presario 5500

Diskette Drives	Spare Part
1.44 MB (three-mode)	160788-301

19.2k-bps Modem, w/DAA, D/F/TAM

Country	Assembly	Spare Part	Cable Spare Part
Australia	176550-011	176561-011	165224-011
Belgium	176550-181	176561-181	165224-181
Denmark	176550-081	176561-081	165224-081
Finland	176550-351	176561-351	165224-351
France	176550-051	176561-051	135716-001
Germany	176550-041	176561-041	165224-041
Italy	176550-061	176561-061	165224-061
Japan	004706-191	213006-191	137256-001
Malaysia	176550-AF1	176561-AF1	165224-001
Netherlands	176550-331	176561-331	165224-331
New Zealand	176550-AP1	176561-AP1	165221-API
Norway	176550-091	176561-091	165224-091
Portugal	176550-131	176561-131	165224-071
Singapore	176550-AF1	176561-AF1	165224-001
Sweden	176550-101	176561-101	165224-101
Switzerland	176550-111	176561-111	165224-111
United Kingdom	176550-031	176561-031	165221-001
U.S./Canada/Latin America	004706-001	213006-001	127949-001

Cable Information	Spare Part
Diskette Data/Power Cables	177071-001
HD/CD ROM Power, Data, Audio Cables	214335-001

System ROM	Spare Part
ROMPaq	148218-001

Modem ROM	Number on ROM	Location	Spare Part
19.2 k bps ¹	3.13	U31	213018-001
19.2 k bps ²	2.53	U31	217808-001
19.2 k bps ³		U31	213019-001

¹ North America.

² Outside North America.

³ Japan.


Miscellaneous External	Spare Part
Keyboard, NA English	160648-001
Mouse, Ivory	196694-001

Power Supply/Battery	Spare Part
Real-Time Clock Battery 4.5 Volts, 600 mA	160274-001


Presario 5500

Memory Upgrade Chart

586 SYSTEM BOARD
004794, 004797
(8 MB)

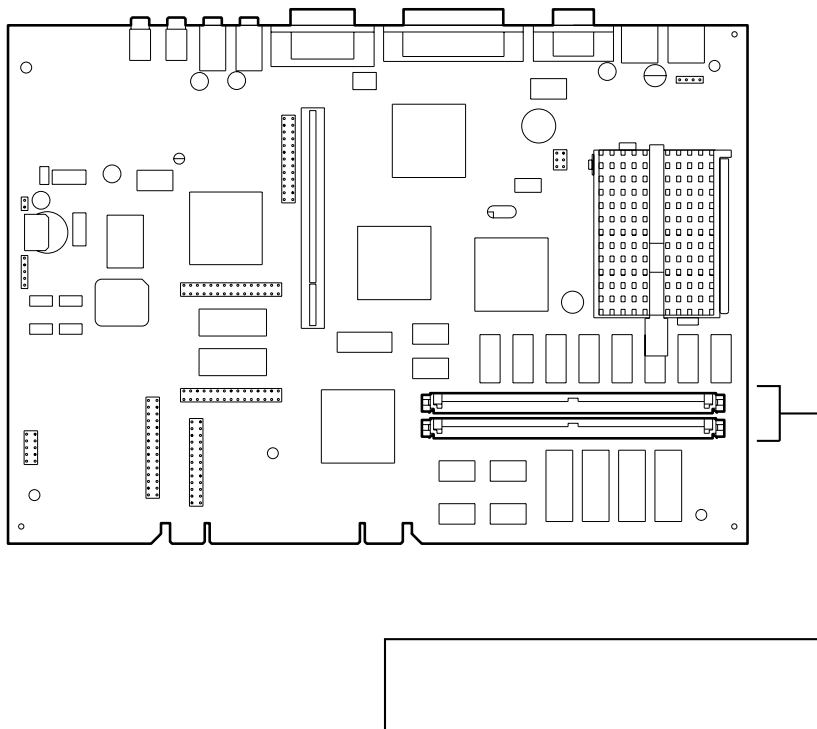

ADD ANY COMBINATION OF MEMORY MODULES UP TO 72 MEGABYTES
TOTAL SYSTEM MEMORY. MUST BE UPGRADED IN IDENTICAL PAIRS
USING INDUSTRY STANDARD 70ns SIMMS WITH TIN/LEAD CONTACTS ONLY.



MEMORY MODULES NOT AVAILABLE