

Professional Workstation AP400

Processor/System Boards	Assembly	Spare Part
Processor Board, w/Tray, w/o Proc. (350, 400, 450 MHz)	008130-001	317706-001
System Board, 500/100, SL1 (350, 400, 450, 500 Mhz)	010279-101	402124-001

Configuration Jumper E1 (008130)

Jumper	Function	Settings	Description
J5	Battery	6 - 7	Internal (on-board) Battery Jumper (Default)
		5 - 6	External Battery Jumper
		1 - 4	External Battery Connection

SW1 Switch Settings (008130)

Frequency	S1	S2	S3	S4	S5	S6
350/100 MHz	OFF	ON	OFF	OFF	OFF	OFF
400/100 MHz	OFF	OFF	ON	ON	OFF	OFF
450/100 MHz	OFF	OFF	ON	OFF	OFF	OFF

Configuration Code	Assembly	System Bd Spare Part	Form Factor ¹
BZY1	008130-101	317706-001	DT
BZY2	010279-101	402124-001	DT
BZY4	008130-101	317706-001	DT
BZY5	010279-101	402124-001	DT
BZY6	008130-101	317706-001	DT
BZY7	010279-101	402124-001	DT
CF31	008130-101	317706-001	DT
CF32	010279-101	402124-001	DT
CF33	008130-101	317706-001	DT
CF34	010279-101	402124-001	DT
CF35	008130-101	317706-001	DT
CF36	010279-101	402124-001	DT
CMD1	010279-101	402124-001	DT
CMD2	010279-101	402124-001	DT
CMD3	010279-101	402124-001	DT
CMD4	010279-101	402124-001	DT
CMD5	010279-101	402124-001	DT

¹ DT = Desktop.

Professional Workstation AP400

Microprocessors	Assembly	Spare Part
350/100, w/ Heat Sink	278309-001	327647-001
400/100, w/ Heat Sink	278309-002	327648-001
450/100, w/ Heat Sink	270309-003	328785-001
500/100, w/ Heat Sink	352772-001	116402-001
	400244-001	
	400250-001	
Heat Sink Bridge	317716-001	327658-001

Memory	Assembly	Spare Part
32 MB 100MHz, SDRAM	306430-001	317747-001
	306430-002	
64 MB 100MHz, SDRAM	333143-001	317745-001
	333143-002	
128 MB 100MHz, SDRAM	306431-001	317756-001
	306431-002	
256 MB 100MHz, SDRAM	306432-001	317749-001
	306432-002	

Miscellaneous	Assembly	Spare Part
Backplane Board	008133-001	317707-001
Keyboard, Spacesaver	166516-XX6	269513-001
Speaker	317727-001	327656-001
Mouse, 3-Button, Opal	269210-006	327716-001
Processor Power Module/Voltage Regulator (350, 400, 450 MHz)	327563-001	327660-001
	354488-001	
	328689-001	
Processor Power Module/Voltage Regulator (350, 400, 450, 500 MHz)	320266-001	329267-001
	330638-001	
Power Switch and LEDs, w/ Cable	299242-001	327655-001
Adapter, 50/60 POS, FEM, SCSI	199618-001	189638-001
Plastics Kit	296713-001	297518-001
	247120-002	
Fan	281811-001	297515-001
Front Bezel	317717-001	327645-001
10K rpm Hard Drive Mounting Bracket w/ Fans	330574-001	329176-001
	330403-001	
	115294-001	
	330565-001	
	144145-002	

Graphic Boards	Assembly	Spare Part
MGA Millennium II Graphics, 2D	270243-002	270242-001
Graphics, 3D+, High End (Fire GL 4000)	298642-001	298797-001
Graphics, PowerStorm 300	338522-001	338539-001
	387236-001	
Graphics, MVP Pro-128 (4-Port)	352430-001	327657-001
Graphics, GLoria Synergy+ (AGP)	327532-001	327599-001
Graphics, 3D High End (GLoria XL)	229371-001	297520-001
Graphics, AGP Matrox	358231-001	294409-001
Graphics, G100	401226-001	101239-001
4MB WRAM, MGA Millennium II	270309-001	270260-001
12MB WRAM, MGA Millennium II	270310-001	270262-001
Memory Module, 4MB (Gloria Synergy+)	327534-001	327600-001

Professional Workstation AP400

CD-ROM Drives	Assembly	Spare Part
CD-ROM, 32X, IDE	179137-701	327659-001
CD-ROM, DVD	401335-712	105771-001

Hard Drives	Assembly	Spare Part
4 GB, Wide-Ultra, SCSI	339512-001 295156-001	339514-001
4 GB, 68 Pin (10K rpm)	336377-001	336383-001
6.4 GB, Ultra ATA (IDE)	298066-001	166973-001
8.4 GB, Ultra ATA (IDE)	334179-001	166981-001
9.1 GB, Wide-Ultra SCSI	339513-001 313721-001	339515-001
9.1 GB, 68-Pin (10K rpm)	336378-001	336384-001
10 GB, Ultra ATA (IDE)	178548-001	320662-001
10 GB, IBM, Titan (7200 rpm)	356046-001	330520-001

Diskette Drives	Assembly	Spare Part
1.44 MB, S-BTN, Opal	141087-702 141087-703 141087-705 141087-706	179161-001
Zip Drive	401474-001	401624-001


Cables	Assembly	Spare Part
Cable, Switch w/LED	299242-002	327655-001
CD-ROM, Audio	171891-001	171139-001
Kit, Signal, Miscellaneous	269166-002 242947-011 242947-012 270847-008 269166-003 171891-009 269159-004 270847-009	327649-001
4-Port, Splitter (Video)	269626-001	299386-001
SCSI	269157-002	297511-001
4 Device, Ultra2 SCSI Cable	269157-004	402226-001

Power Supply/Battery	Assembly	Spare Part
Power Supply, 200 W	350683-002 299310-003	327651-001
Battery, Alk, 4.5v, 600mA	160225-001	160274-001


Professional Workstation AP400

Memory Upgrade Chart

SYSTEM BOARD
008130-101

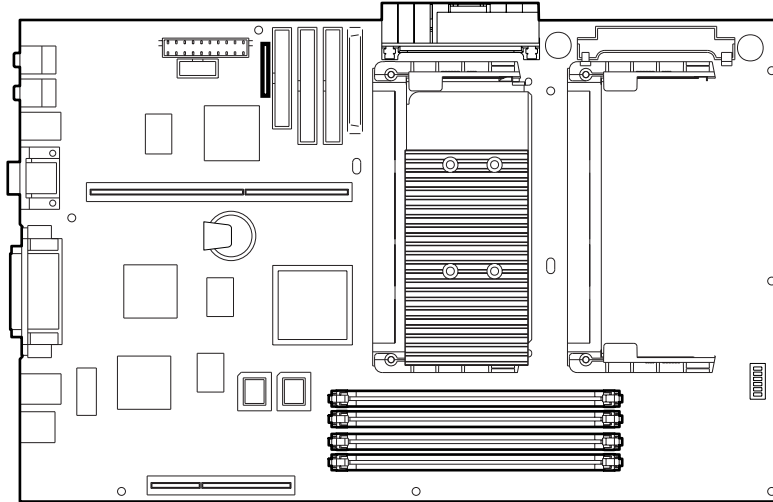

A MAXIMUM OF 1 GB TOTAL MEMORY



32-MB 100MHz SDRAM (registered) - OPTION PN 317736-B21

64-MB 100MHz SDRAM (registered) - OPTION PN 317737-B21

128-MB 100MHz SDRAM (registered) - OPTION PN 317738-B21

256-MB 100MHz SDRAM (registered) - OPTION PN 317739-B21