
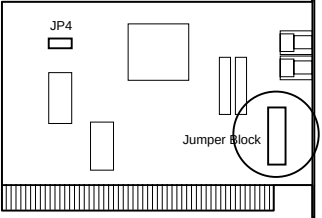


Modem Configuration

Modem Speed: **14.4K** Model: **FAX**

Spare Part Number (US) 188812-001



Jumper Block Settings

COM PORT	IRQ	1-2	3-4	5-6	7-8	9-10	11-12
1 (default)	4						
2	3						
3	5						
	4*						
4	2						
	3*						


Key  Jumper NOT Installed
 Jumper Installed

* Use these IRQs only if your software can not address IRQ5 or IRQ2
** When using Windows with the modem set for IRQ2, select IRQ9 in Control Panel

Modem Configuration

Modem Speed: 14.4K **Model: FAX**


Spare Part Number (US) 176821-001
Assembly Number 176813-001

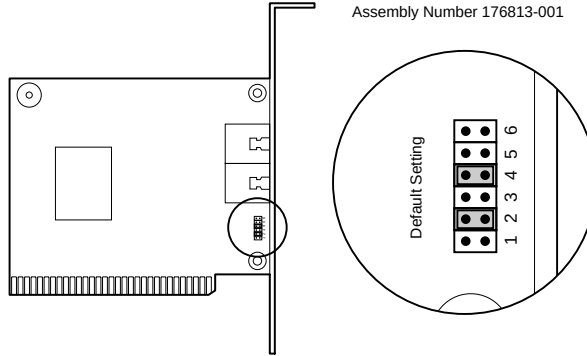

Jumper Block Settings

COM PORT	IRQ	1	2	3	4	5	6
1	4	●	●	○	○	●	○
2 (defaults)	3	○	●	○	●	○	○
3	5	●	○	○	○	○	●
	4*	●	○	○	○	●	○
4	2	○	○	●	○	○	○

* Use these IRQs only if your software cannot address IRQ 5 or IRQ 2.



NOTES:

When using Windows with the modem set for IRQ 2, select IRQ 9 in Control Panel.

Jumper Block Settings


COM PORT	SW1	SW2	SW3	SW4	SW5	SW6
1	●	●	○	○	●	○
2 (defaults)	○	●	○	●	○	○
3	●	○	○	○	●	○
4	○	○	○	●	○	○

Key ○ Jumper NOT Installed
● Jumper Installed

Modem Configuration

Modem Speed: **28.8K** Model: **FAX**

Spare Part Number (NA): 259214-002

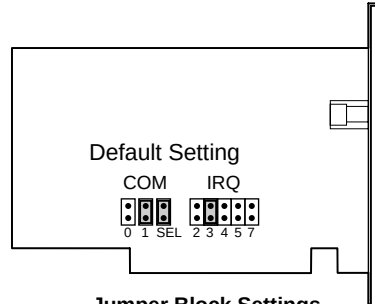

Jumper Block Settings


COM PORT	IRQ	0	1	SEL	2	3	4	5	7
1	4								
2	3								
3	4								
4	3								
Plug & Play									

Key Jumper NOT Installed
 Jumper Installed

Modem Configuration

Modem Speed: 28.8K **Model: FAX**

Spare Part Number (EMEA) 223607-031, -041, -051

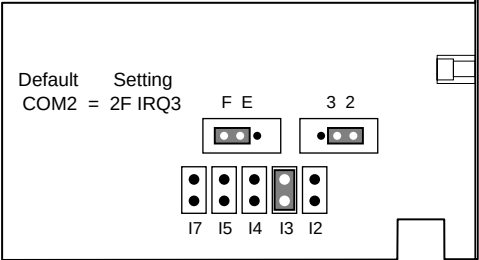


Jumper Block Settings

COM PORT	FE	32	12 IRQ 2	13 IRQ 3	14 IRQ 4	15 IRQ 5	17 IRQ 7
1							
2							
3							
4							

Key Jumper NOT Installed
 Jumper Installed

Modem Speed: 33.6/14.4K **Model: DATA/FAX**

REPLACES 28.8 MODEM Option Part Number 259213-002

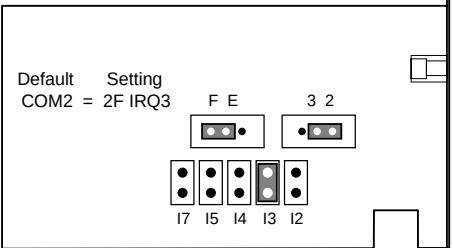

Jumper Block Settings

COM PORT	FE	32	12 IRQ 2	13 IRQ 3	14 IRQ 4	15 IRQ 5	17 IRQ 7
1							
2							
3							
4							

Key Jumper NOT Installed
 Jumper Installed

Modem Configuration

Country-Specific Modem Part Numbers

2400-Baud Internal Modems for: Compaq LTE, LTE/286, SLT/286, SLT 386s/20

Country	LTE and LTE/286		SLT/286 SLT and 386s/20	
	Assembly	Spare Part	Assembly	Spare Part
Australia	300167-001	150688-001	110411-001	150618-001
Finland	300170-001	150688-004	110407-001	150622-001
France	117132-005	150688-005	110401-001	150625-001
Italy	117132-007	150688-007	110402-001	150628-001
Netherlands	300174-001	150688-008	110410-001	150626-001
New Zealand	300175-001	150688-009	110412-001	150619-001
Norway	300176-001	150688-010	110405-001	150621-001
Sweden	300178-001	150688-012	110406-001	150620-001
Switzerland	300179-001	150688-013	110408-001	150623-001
United Kingdom	117132-014	150688-014	110399-001	150617-001

Enhanced 2400-Baud Modem for LTE 386s/20, LTE Lite Family, Contura Family Modem Engine Assembly 124642-001 (Spare Part 121308-002)

Country	DAA		Telephone Cable Spare Part
	Assembly	Spare Part	
Australia	124611-011	121317-001	126750-001
Austria	124611-341	121320-001	127947-001
Denmark	124611-081	121322-001	127945-001
Finland	124611-351	121324-001	127943-001
France	124611-051	121331-001	Not Available
Germany	124611-041	121323-001	127944-001
Italy	124611-061	121325-001	127942-001
Netherlands	124611-331	121326-001	127941-001
New Zealand	124611-361	121319-001	127948-001
Norway	124611-091	121327-001	127940-001
Spain	124611-071	121318-001	127841-001
Sweden	124611-101	121329-001	127939-001
Switzerland	124611-111	121330-001	126751-001
United Kingdom	124611-031	121322-001	127948-001
North America	124611-001	127831-001	127841-001