

Deskpro 466

System Boards	Assembly	Spare Part	System
System Board, PCI, AM ⁴ , 8 MB, ENET, w/o Processor	003786-101	173146-001	3x3 ¹ , 4x4 ²
System Board, PCI, AM ⁴ , 8 MB, ENET, w/o Processor	003786-101	173147-001	5x5 ³
System Board, PCI, AM, 8 MB, ENET, w/o Processor	003904-101	172168-001	3x3, 4x4
System Board, AM, PCI, 8 MB, ENET, w/o Processor	003904-101	172621-001	5x5
System Board, AM, PCI, 8 MB, w/o Processor	003907-101	172169-001	3x3, 4x4
System Board, AM, PCI, 8 MB, w/o Processor	003907-101	172165-001	5x5

¹ 3x3 = 3 bay, 3 slot form factor.

² 4x4 = 4 bay, 4 slot form factor.

³ 5x5 = 5 bay, 5 slot form factor.

⁴ AM = Asset Management.

Configuration Jumpers, 486-Based System Boards (003786, 003904, 003907)

Jumper	Function	Setting	Description
E5	Internal/External Battery	1 – 2	Internal (on-board) Battery
		2 – 3	External Battery. Connect at header P3.
E6	Password Enable/Disable	1 – 2	Password Enabled
		2 – 3	Password Disabled

SW1, Speed Settings, 486-Based System Boards (003786, 003904, 003907)

CPU Type/Operation	S1	S2	S3	S4
486DX2/50	ON	ON	OFF	OFF
486DX2/66	ON	OFF	OFF	OFF
486DX4/100	ON	OFF	OFF	OFF

Configuration Code *	Assembly	System Board Spare Part	Form Factor
HKS1***	003904-101	172168-001	3x3
HKS1***	003786-101	173146-001	3x3
HKS2***	003904-101	172168-001	3x3
HKS2***	003786-101	173146-001	3x3
HKS3	003907-101	172169-001	3x3
HKS4***	003904-101	172168-001	3x3
HKS4***	003786-101	173146-001	3x3
HKS5	003907-101	172169-001	3x3
HKS6 **	003786-101	173146-001	3x3
GKS2***	003904-101	172168-001	3x3
GKS2***	003786-101	173146-001	3x3
GKS3	003907-101	172169-001	3x3
GKS4***	003904-101	172168-001	3x3
GKS4***	003786-101	173146-001	3x3
GKS5	003907-101	172169-001	3x3
GKS6 **	003786-101	173146-001	3x3

Continued

Deskpro 466

Configuration Code *	Assembly	System Board Spare Part	Form Factor
HKU1***	003904-101	172168-001	4x4
HKU1***	003786-101	173146-001	4x4
HKU2***	003904-101	172168-001	4x4
HKU2***	003786-101	173146-001	4x4
HKU3	003907-101	172169-001	4x4
HKU4***	003904-101	172168-001	4x4
HKU4***	003786-101	173146-001	4x4
HKU5***	003904-101	172168-001	4x4
HKU5***	003786-101	173146-001	4x4
HKU6	003907-101	172169-001	4x4
HKU7 **	003786-101	173146-001	4x4
HKU8 **	003786-101	173146-001	4x4
GKU2***	003904-101	172168-001	4x4
GKU2***	003786-101	173146-001	4x4
GKU3	003907-101	172169-001	4x4
GKU4***	003904-101	172168-001	4x4
GKU4***	003786-101	173146-001	4x4
GKU5***	003904-101	172168-001	4x4
GKU5***	003786-101	173146-001	4x4
GKU6	003907-101	172169-001	4x4
GKU7 **	003686-101	173146-001	4x4
GKU8 **	003686-101	173146-001	4x4
HLE1***	003904-101	172621-001	5x5
HLE1***	003786-101	173147-001	5x5
HLE2***	003904-101	172621-001	5x5
HLE2***	003786-101	173147-001	5x5
HLE3	003907-101	172165-001	5x5
HLE4***	003904-101	172621-001	5x5
HLE4***	003786-101	173147-001	5x5
HLE5***	003904-101	172621-001	5x5
HLE5***	003786-101	173147-001	5x5
HLE6 **	003786-101	173147-001	5x5
GLE2***	003904-101	172621-001	5x5
GLE2***	003786-101	173147-001	5x5
GLE3	003907-101	172165-001	5x5
GLE4***	300904-101	172621-001	5x5
GLE4***	003786-101	173147-001	5x5
GLE5***	003904-101	172621-001	5x5
GLE5***	003786-101	173147-001	5x5
GLE6 **	003768-101	173147-001	5x5

* "G" codes are European models. "H" codes are worldwide.

** Can use Intel or AMD processors.

*** Must use assembly number AND configuration code to order spare.

Microprocessors	Spare Part	System
486DX2/50	172937-001	3x3, 4x4
486DX2/66	194395-001	4x4, 5x5
P24C-100/33	172673-001	3x3, 4x4, 5x5

Deskpro 466

Memory	Assembly	Spare Part	System
4 MB SIMM, 70ns	172707-002	172718-001	3x3, 4x4, 5x5
8 MB SIMM, 70ns	172707-003	172719-001	3x3, 4x4, 5x5
16 MB SIMM, 70ns	172707-004	172938-001	3x3, 4x4, 5x5
32 MB SIMM, 70ns	172707-005	172939-001	3x3, 4x4, 5x5
128K Cache Memory	003868-001	172085-001	3x3, 4x4, 5x5
256K Cache Memory	004416-001	172894-001	3x3, 4x4, 5x5
1 MB Video Memory, DRAM ¹	004120-001	171044-001	3x3, 4x4, 5x5
1 MB Video Memory, VRAM ²	003971-001	172467-001	3x3, 4x4, 5x5

¹ Cirrus Logic GD 5434.

² Qvision 1280P+.

Miscellaneous	Assembly	Spare Part	System
Backplane	003730-001	172622-001	3x3
Backplane	003733-001	172623-001	4x4
Backplane	003736-001	172624-001	5x5
Speaker w/o Bracket	141045-001	141336-001	3x3, 4x4
Speaker w/ Bracket	141045-001	172831-001	5x5
WSS Feature Card	004198-001	172078-001	4x4, 5x5

Controller Boards	Assembly	Spare Part	System
6260 SCSI-2 Controller*	004004-001	133880-001	3x3, 4x4, 5x5
Ethernet ISA Controller w/ Slot Bracket	003086-001	147220-001	3x3, 4x4, 5x5
IDE Controller	002172-001	171745-001	3x3, 4x4, 5x5
SCSI, ISA, Plug and Play	184750-001	184751-001	3x3, 4x4, 5x5
Token Ring Controller w/ Cable & Bracket		172194-001	3x3, 4x4, 5x5
Token Ring Controller w/o Cable & Bracket		172885-001	3x3, 4x4, 5x5

* See Multiproduct Boards Appendix for settings.

CD-ROM Drive	Spare Part	System
CD-ROM, 16X, IDE, Slot Load, 5.25", Half Height	278791-001	All
CD-ROM, Internal, QuadSpeed, IDE	172717-001	3x3, 4x4, 5x5

Hard Drives	Type	Spare Part	System
270 MB, IDE, DFP*	65/66	172778-001	3x3, 4x4, 5x5
420 MB, IDE	65	172780-001	3x3, 5x5
535 MB SCSI	N/A	148286-001	3x3, 4x4, 5x5
540 MB, DFP	65	188666-001	3x3, 4x4, 5x5
1.08 GB, IDE, DFP	65	172941-001	3x3, 4x4, 5x5
1.05 GB SCSI	N/A	192799-001	3x3, 4x4, 5x5
2.1 GB Fast SCSI-2	N/A	142272-001	3x3, 4x4, 5x5

* DFP = Drive Fault Prediction.

Deskpro 466

Tape Drives	Spare Part	System	Tape Cartridge	Spare Part
340/680 MB w/ Comp	187658-001	3x3, 4x4, 5x5	340 MB	184299-001
			680 MB	184300-001
525 MB ACA	142073-201	3x3, 4x4, 5x5	525 MB	119504-001
4 GB TR4, IDE	294126-001		4 GB TR4	294140-001
5.0 GB DAT	142074-201	3x3, 4x4, 5x5	2.0 GB DAT	131148-001
			5.0 GB DDS2	199496-001

Diskette Drives	Spare Part	System
1.44 MB, 3-Mode	160788-201	3x3, 4x4, 5x5

SpeedPaq 144/I Internal Fax/Modem

Country	Assembly	Spare Part	System
U.S.*	003002-001	147453-001	3x3, 4x4, 5x5

* See Modem Configuration Appendix for settings.

28.8k-bps Modem

Country	Assembly	Spare Part	RJ-11 Phone Cable
U.S.	223610-002	259214-002	127949-001

Cables	Spare Part	System
2-Device SCSI, 3-Connector	146997-001	3x3, 4x4, 5x5
Adapter, AUI to BNC E/Net Transceiver, External	192768-001	3x3, 4x4, 5x5
CD-ROM/HD Cable	172481-001	5x5
Diskette Drive Cable (3x3)	172477-001	3x3
Diskette Drive Cable (4x4)	172797-001	4x4
Diskette Drive Cable (5x5)	172480-001	5x5
Hard Drive Select Cable	172945-001	3x3, 4x4, 5x5
Kit: IDE CD-ROM/HD Cable (2); Audio Cables (2)	172478-001	3x3, 4x4
LED Assembly	172531-001	3x3, 4x4
LED Assembly	141346-001	5x5
Monitor ID Cable (asset control)	172482-001	3x3, 4x4, 5x5
Token Ring Cable	172844-001	3x3, 4x4, 5x5


ROM Information	Spare Part	System
System ROMPaq	148218-001	3x3, 4x4, 5x5

Battery/Power Supply	Spare Part	System
Battery, Clock, Real-Time (4.5 V Alkaline)	160274-001	3x3, 4x4, 5x5
Power Supply, 145 W, U.S.	172765-001	3x3, 4x4
Power Supply, 145 W, PFC, Outside U.S.	172766-001	3x3, 4x4
Power Supply, 185 W	172838-001	5x5
Power Supply, 185 W, PFC	172839-001	5x5


Deskpro 466

Memory Upgrade Chart

PROCESSOR BOARD
003786/003904/003907
(8 MB)

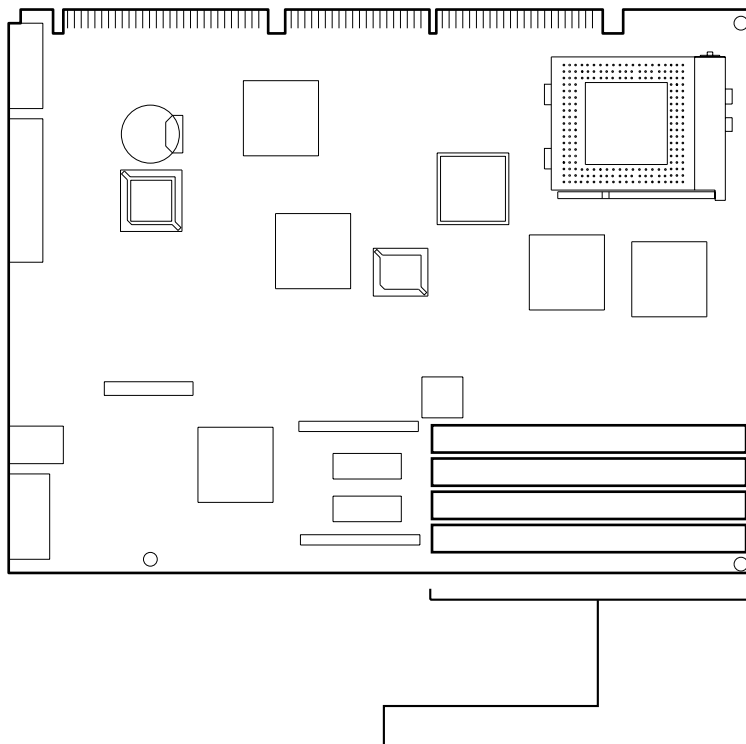

ADD ANY COMBINATION OF THE FOLLOWING MEMORY MODULES,
UP TO 136 MEGABYTES TOTAL SYSTEM MEMORY



4-MB 70ns - OPTION PN 172712-001

8-MB 70ns - OPTION PN 172713-001

16-MB 70ns - OPTION PN 172714-001

32-MB 70ns - OPTION PN 172715-001