

Deskpro EC

Not Offered in NA and EMEA

System/Processor Boards	Assembly	Spare Part
System Board w/ Tray, Intel BX Chipset	144393-X01	136339-001
System Board w/ Tray, Intel 810e Chipset	010697-X01	187672-001

Note: To avoid injury from electric shock and/or hot surfaces, unplug the AC power cord from the wall outlet and allow the internal components of the PC to cool before servicing the unit.

Configuration (144393)

Jumper	Function	Setting	Description
E50	Normal (default)	1-2	To clear CMOS, move jumper from pins "1-2" to pins "2-3" for 60 seconds. Then, return jumper to original location.
	Clear CMOS*	2-3	

*Power must be disconnected. Unplug AC power cord prior to clearing CMOS.

BIOS Setup Configuration Jumper Settings

Function/Mode	Jumper Setting	Configuration
Normal	1-2	BIOS uses current configuration information and passwords for booting.
Configure	2-3	After the POST runs, Setup runs automatically. The maintenance menu is displayed.
Recovery	none	BIOS attempts to recover the BIOS configuration. A recovery diskette is required.

Configuration Code	Assembly	System Board Spare Part
DJ**	144393-X01	136339-001
DR**	010697-X01	187672-001
DS**	010697-X01	187672-001
DY**	010697-X01	187672-001

**Denotes any combination precluded by the indicated initial two characters, that are EC units.

Microprocessors	Spare Part
433/66 MHz uP w/ Heat Sink, Celeron	152296-001
466/66 MHz uP w/ Heat Sink, Celeron	174742-001
500/66 MHz uP w/ Heat Sink, Celeron	166366-001
500/100 MHz uP w/ Heat Sink, Pentium, CuMine	166365-001
533/100 MHz uP w/ Heat Sink, Pentium, CuMine	174743-001

Memory	Spare Part
32 MB Memory Module, DIMM	166890-001
64 MB Memory Module, DIMM	179190-001
128 MB Memory Module, DIMM	166966-001

CD-ROM Drive	Spare Part
CD-ROM, 32X	327659-001

Hard Drives	Spare Part
4.3 GB, 3.5"	128474-001
8.4 GB, 3.5", DPS	163804-001
10.0 GB, 3.5", 7200 rpm, U66, DPS	135364-001

Deskpro EC

Not Offered in NA and EMEA

Diskette Drive	Assembly	Spare Part
1.44 MB	136239-001	136338-001

Miscellaneous	Assembly	Spare Part
Video Card, ATI Rage Pro, 1X, 4 MB	009799-002	166871-001
Hood Assembly	144445-001	149800-001
Front Bezel Assembly	144446-002	159705-001
I/O Panel	146041-001	149805-001
HDD Cable	108950-001	146019-001
HDD Bracket	146040-001	149807-001
Power/LED Cable	136240-001	136340-001
Keyboard	314036-001	269513-XXX
Mouse	141649-006	166861-001


Power Supply	Assembly	Spare Part
Power Supply	136238-001	136337-001

Deskpro EC


Not Offered in NA and EMEA

Memory Upgrade Chart

PROCESSOR BOARD
144393-X01, 010697-X01

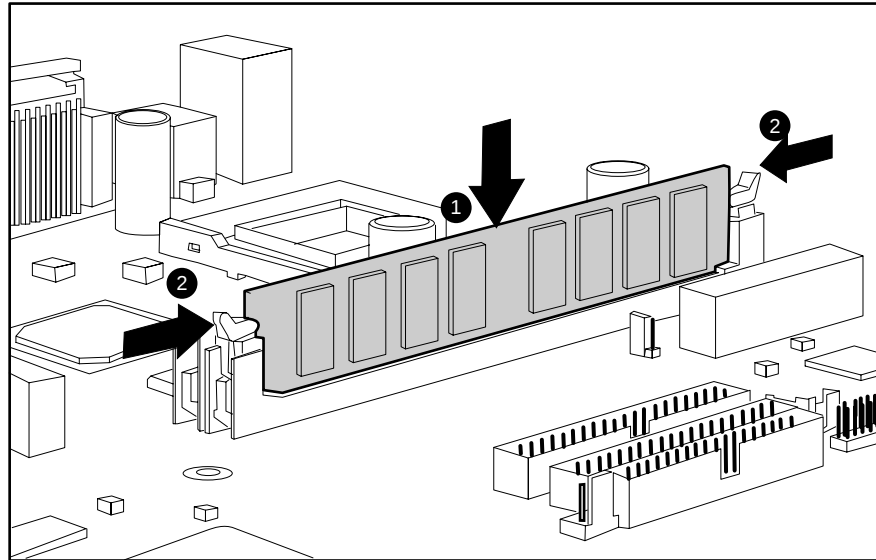

A MAXIMUM OF 256 MB TOTAL MEMORY.



32-MB 66 MHz SDRAM DIMMs - OPTION PN 242804-B21

64-MB 66 MHz SDRAM DIMMs - OPTION PN 270859-B21

128-MB 66 MHz SDRAM DIMMs - OPTION PN 270812-B21

64-MB 100 MHz SDRAM DIMMs - OPTION PN 166613-B21

128-MB 100 MHz SDRAM DIMMs - OPTION PN 166614-B21