

Professional Workstation 5000

System Boards	Assembly	Spare Part
System Board, P6/200 w/ Tray, w/o Proc.	006340-101	269259-001

Configuration Jumper E1 (006340)

Jumper	Function	Settings	Description
E1	Battery	6 - 7	Internal (on-board) Battery Jumper (Default)
		5 - 6	External Battery Jumper
		1 - 4	External Battery Connection

SW1 Switch Settings (006340)

	S1	S2		S3	S4	S5	S6
Power-On Password	Enabled *	OFF					
	Disabled	ON					
CPU Bus Frequency	60 MHz	OFF					
	66 MHz *	ON					
Bus/CPU Core Freq. Ratio							
2/4				ON	ON	ON	ON
2/5				ON	ON	ON	OFF
2/6 *				ON	ON	OFF	ON
2/7				ON	ON	OFF	OFF
2/8				ON	OFF	ON	ON
2/9				ON	OFF	ON	OFF
2/10				ON	OFF	OFF	ON
2/11				ON	OFF	OFF	OFF

* Default.

Configuration Code	Assembly	System Bd Spare Part	Form Factor ¹
BJS2	006340-101	269259-001	DT
BJS3	006340-101	269259-001	DT
BJS4	006340-101	269259-001	DT
BJT3 (Dual Processors)	006340-101	269259-001	DT
BJS6	006340-101	269259-001	DT
BJT2 (Dual Processors)	006340-101	269259-001	DT

¹ DT = Desktop.

Microprocessors	Spare Part
P6/200 w/256k Cache	273759-001
Heat Sink w/ Clip, Thermal	269262-001

Memory	Assembly	Spare Part
16 MB DIMM, 60ns	247287-002	269414-001
32 MB DIMM, 60ns	247288-002	269263-001
64 MB DIMM, 60ns	247289-002	269264-001
128 MB DIMM, 60ns	247269-002	269266-001
2 MB DRAM, 50ns, EDO	185055-003	269411-001
2MB WRAM, Millennium	223335-001	223339-001
6MB WRAM, Millennium	223336-001	223340-001

Professional Workstation 5000

Miscellaneous	Assembly	Spare Part
Backplane, 1-1-3	006343-001	269257-001
Keyboard, Space Saver	235212-101	235496-101
Keyboard, Erase Eze	247430-xxx	247432-xx1
Speaker	247356-001	247508-001
Mouse, 2-Button	161649-004	141189-401
Mouse, 3-Button	269210-001	269278-001
Mic, GEM	142862-001	194376-001
Regulator Module	225431-001	225529-001
Keyboard, Erase-Ease	247430-101	247432-001

Graphic Boards	Assembly	Spare Part
Millennium Graphics, PCI	006443-001	243136-001
Graphics, 500TX	270118-002	269277-001

CD-ROM Drive	Assembly	Spare Part
CD-ROM, Internal, 8X, IDE		185916-201
PD/CD-ROM, SCSI		184691-201
PD/CD Media		186075-001
CD-ROM, DVD	401335-712	105771-001

Hard Drives	Spare Part
4.3 GB, Wide-SCSI 1.6"	269387-001
4.3 GB, Ultra SCSI (1")	269272-001
2.15 GB, Ultra SCSI, SMART*	247409-001
2.1 GB, Wide-SCSI	269415-001
2.0 GB, Ultra SCSI	269271-001
9.1 GB Wide-Ultra SCSI	199886-001

* SMART = Self-Monitoring Analysis and Reporting Technology.

Tape Drives	Spare Part	Tape Cartridge	Spare Part
2/4-GB DAT	142074-201	1.3 GB 60 M DDS1	131167-001
		2.0 GB 90 M DDS1	131148-001
		DDS1 Cleaning Cart	131194-001
4-/8-GB, DAT	295163-001	4.0 GB 120M DDS2	199496-001
		DDS2 Cleaning Cart	242618-001
4-/16-GB TurboDAT	199464-201	4.0 GB 120M DDS2	199496-001
		DDS2 Cleaning Cart	242618-001

Diskette Drives	Spare Part
1.44 MB, 3-Mode	160788-201

33.6k-bps Modem				
Country	Assembly	Spare Part	RJ-11 Phone Cable	Option
U.S.	295106-001	259214-002	127949-001	259213-002

Professional Workstation 5000


Cables	Spare Part
Hard Drive, SCSI, Wide	269268-001
Diskette Drive	269412-001
CD-ROM	269269-001
CD-AUDIO	171139-001
SCSI Adapter	189638-001
Voltage Adapter, PCI	269419-001
Dual, HD/PWR	269441-001
Adapter, Connector 50-pin	147237-001
SCSI, 4-Drive	148259-001
Single VD, 15P-15P, D	210430-001
RJ11	127949-001
External, Wide-to-Narrow SCSI, 6'	189636-002

Power Supply/Battery	Spare Part
Power Supply, 240 W, w/ Switch	269249-001
Battery, Alk, 4.5v	160274-001


Professional Workstation 5000

Memory Upgrade Chart

PROCESSOR I/O BOARD
006340

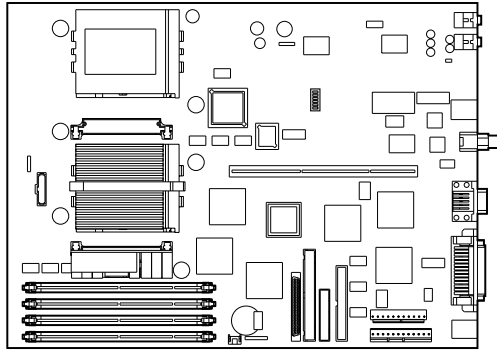

A MAXIMUM OF 512-MB TOTAL MEMORY



16-MB EDO DRAM 60ns DIMMS
OPTION PN 225481-001

32-MB EDO DRAM 60ns DIMMS
OPTION PN 225482-001

64-MB EDO DRAM 60ns DIMMS
OPTION PN 225483-001

128-MB EDO DRAM 60ns DIMMS
OPTION PN 225484-001