

Deskpro 4000N

System Boards	Assembly	Spare Part	System
Board w/o Processor	007602-101	306425-001	<Date 1997
Board w/o Processor	008074-101	288507-001	>Date 1998
Board w/o Processor, Brazil	007602-201	306425-201	<Date 1997
New PCA	008074-101	288507-001	>Date 1998
New PCA, Brazil	008074-201	288507-201	>Date 1998

Configuration Jumper, System Board (007602-001, 008074-101)

Jumper	Function	Setting	Description
P14	Battery; Clear CMOS	1 – 2	Internal Battery Jumper (Default)
		2 – 3	Clear CMOS*
		9 – 12	External Battery Header**

* A/C must also be removed.

** Connecting the external battery automatically disconnects the internal battery.

SW1, Speed Settings, System Board (007602-001, 008074-101)

BUS Proc. Speed	S1	S2	S3	S4	S5	S6
166 MHz	*	ON	ON	OFF	ON	**
200 MHz	*	OFF	ON	OFF	ON	**
233 MHz	*	OFF	OFF	OFF	ON	**

* S1 = Power-On Password Feature. ON = Disable: OFF = Enable.

Computer is shipped in the OFF/Enabled position.

** S1 = A/C ON Feature. ON = Enable: OFF = Disable.

Computer is shipped in the OFF/Disabled position.

CONFIGURATION CODE TABLE			
Configuration Code	Assembly	System Bd Spare Part	System
BQ22	*	*	5200MMX
BQZ2	*	*	5166MMX
BQZ3	*	*	5166MMX
BSS2	*	*	5233MMX
BSS3	*	*	5233MMX
BQ23	*	*	5200MMX

* See System Board Table above to order the correct system board.

Microprocessors	Spare Part	System
586, 166/66	288460-001	P55C/166
586, 200/66	288459-001	P55C/200
586, 233/66	286258-001	P55C/233
Heat Sink w/ Clip and Pad	288473-001	All

Memory	Spare Part	Option	System
8 MB, SDRAM, DIMM	288438-001	242802-B21	All
16 MB, SDRAM, DIMM	278066-001	242803-B21	All
32 MB, SDRAM, DIMM	278067-001	242804-B21	All
64 MB, SDRAM, DIMM	278095-001	242805-B21	All
128 MB, SDRAM, DIMM	278096-001	270812-B21	All
16 MB, SDRAM, DIMM, ECC	278097-001	270840-B21	All
32 MB, SDRAM, DIMM, ECC	288440-001	270841-B21	All
64 MB, SDRAM, DIMM, ECC	278098-001	270842-B21	All
128 MB, SDRAM, DIMM, ECC	278099-001	270843-B21	All

Deskpro 4000N

Miscellaneous	Assembly	Spare Part	System
Backplane w/ Bracket	007495-001	306426-001	All
Mouse, Two-Button	141649-004	141189-401	All
Mounting Bracket, System		288461-001	All
Keyboard, Spacesaver	166516-001	166514-001	All
Hood Assembly		308348-001	All

Controller Boards	Assembly	Spare Part	System
Netelligent NIC, 10/100 TX, PCI, UTP (option)	005139-001	169849-001	All
Netelligent NIC, 10 Base T, PCI, UTP (option)	006064-001	242501-001	All
Netelligent 16/4 TR Adapter, PCI, STP/UTP (option)	199764-001	199764-001	All
USCSI, PCI, Plug and Play	185202-001	247399-001	All
Controller	296628-001	296478-001	All
PCI NIC, Token Ring (option)		268010-001	All
AUI/BNC Adapter	142858-002	192768-001	All

Hard Drives	Spare Part	System
1.6 GB, IDE	308347-001	All
2.1 GB, IDE	288449-001	All
2.4 GB, Ultra ATA (option)	296679-001	All
4.3 GB, Ultra ATA (option)	294191-001	All

Cables	Spare Part	System
Hard Drive Cable	288442-001	All
SCSI, LED, SH	247485-001	All
2-Dev w/ Term, A	184118-001	All
Audio, SoundBlaster	294170-001	All
RJ 45 Connector	290663-001	All
Null Modem Cable	118773-001	All

ROM Information (All systems)


System ROMPaq

Power Supply/Battery	Spare Part	System
Power Supply, 76 W	288329-001	All
Battery, Alk, 4.5v, 600ma, RTC	160274-001	All


Deskpro 4000N

MEMORY UPGRADE CHART

SYSTEM BOARD
006582-101, 007602-101

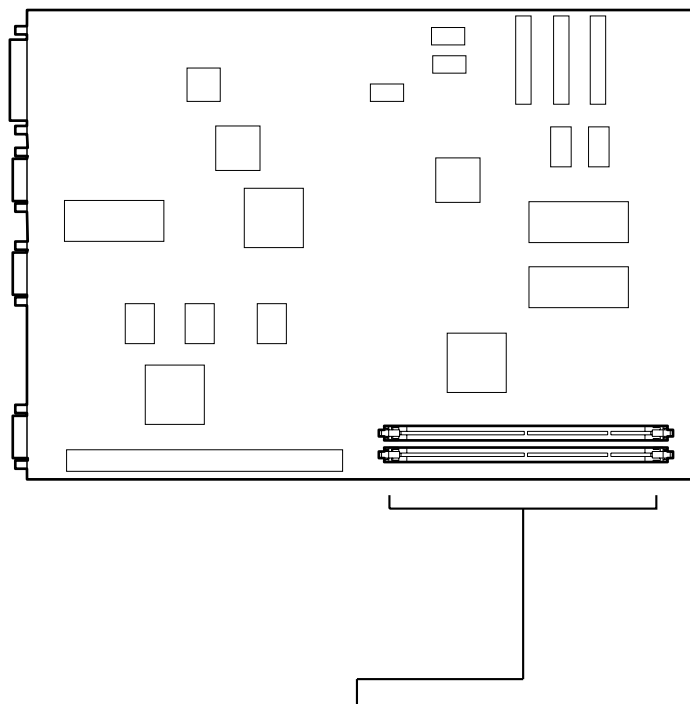

A MAXIMUM OF 256 MB TOTAL MEMORY



8-MB 66MHz DIMMS, SDRAM - OPTION PN 242802-B21

16-MB 66MHz DIMMS, SDRAM- OPTION PN 242803-B21

32-MB 66MHz DIMMS, SDRAM - OPTION PN 242804-B21

64-MB 66MHz DIMMS, SDRAM - OPTION PN 242805-B21

128-MB 66MHz DIMMS, SDRAM - OPTION PN 270812-B21