

PROLIANT 1000

System Boards	Assembly	Spare Part
486DX2/66 System I/O	003251	149337-001
5/60 System I/O Board	004007	190043-001

SW1 Switch Settings (003251)

Function	S1	S2	S3
486DX2/66	ON	OFF	ON
Overdrive Processor *	OFF	ON	ON

* When available.

SW2 Switch Settings (003251, 004007)

SW	Function	Position	Status
S1	VIDEO DISABLE	OFF (default)	ENABLED
	If ROM detects optional video bd, this sw is ignored and integrated video disabled.	ON	DISABLED
S2	CONFIGURATION LOCK	OFF (default)	DISABLED
	System Configuration cannot be changed when S2 is on (enabled).	ON	ENABLED
S3	RESERVED	OFF (default)	
S4	DISKETTE BOOT ENABLE	OFF (default)	DISABLED
	When S4 ON, system can be booted from diskette no matter what configuration reads.	ON	ENABLED
S5	POWER-ON PASSWORD DEFEAT	OFF (default)	DISABLED
	Password set in configuration.	ON	ENABLED
S6	NV RAM	OFF (default)	DISABLED
	Invalidates NV RAM and configuration is cleared when S6 is ON (enabled)	ON	ENABLED

Memory Modules	Speed	Assembly	Spare Part
1 MB Memory Module	70 ns	118666-004	141752-001
1 MB Memory Module	80 ns	118666-002	118740-001
2 MB Memory Module	70 ns	118667-004	141753-001
2 MB Memory Module	80 ns	118667-002	113923-001
4 MB Memory Module	70 ns	118665-004	141754-001
4 MB Memory Module	80 ns	118665-002	118741-001
8 MB Memory Module	70 ns	129041-002	141755-001
8 MB Memory Module	80 ns	129041-001	128954-001
16 MB Memory Module	70 ns	137143-003	149947-001
16 MB Memory Module	80 ns	137143-002	139143-001
32 MB Memory Module	70 ns	139973-002	149948-001
32 MB Memory Module	80 ns	139973-001	139949-001

PROLIANT 1000

Controller Boards	Assembly	Spare Part
SMART Controller	002969	142130-001
	003596	181132-001
Fast SCSI-2 Controller	002682	142040-001
Fast-Wide SCSI-2/E Controller	003529	199634-001
NetFlex Controller	002709	142041-001
NetFlex Controller Token Ring Module	142035	142042-001
NetFlex-2 ENET-TR Controller	003382	142222-001
NetFlex-2 DualPort ENET Controller	003101	142151-001
NetFlex-2 TR Controller	003647	199521-001
NetFlex-2 DualPort TR Controller	003104	142195-001
NetFlex-3/E Controller	004162	169801-001
NetFlex-3/P Controller	004165	169811-001
NetFlex-3 100 Base-TX Upgrade Module	004183	169805-001
NetFlex-3 100 VG-AnyLAN Upgrade Module	004189	169803-001

Miscellaneous Internal	Assembly	Spare Part
2400 Baud Modem ¹	001768-002	121308-002
2400 Baud Modem ²	001732-002	121250-001
SpeedPaq 144 Modem Engine ⁴	002449-001	199906-001
Serial/Parallel Interface Board ³	000990-001	106886-001
SpeedPaq 144/I Data/Fax Modem ⁴	003002	147453-001
Hot-Pluggable Drive Backplane	003621-001	148579-001
Hot-Pluggable Drive Tray	146729-003	146781-001

¹ Outside North America.

² North America.

³ See Volume 2 Appendix, Multiproduct Boards, for settings.

⁴ See Volume 2 Appendix, Modem Configuration Information.

Miscellaneous External

See "ProLiant Storage System" section for information on:

- * External hot-pluggable hard drives
- * Stand-By Recovery Server Option and cables
- * On-Line Recovery Server Option and cables

See "SCSI Storage Expander" section for information on:

- * External non-pluggable hard drives
- * External tape drives

Hard Drives	Spare Part
550 MB Pluggable Fast SCSI-2	146799-001
1.05 GB Pluggable Fast SCSI-2	146717-001
2.1 GB Pluggable Fast SCSI-2	199428-001
2.1 GB Pluggable Fast-Wide SCSI-2	199643-001 ¹
4.3 GB Pluggable Fast SCSI-2	199584-001
4.3 GB Pluggable Fast-Wide SCSI-2	199598-001 ¹

¹ Requires Optional Fast-Wide SCSI-2 Backplane Upgrade.

CD-ROM Drives	Spare Part
Tray Load, Internal	142223-001
Tray Load, External	199430-001
Caddy Load	133881-001

PROLIANT 1000

Diskette Drives	Spare Part
1.2 MB	112566-001
1.44 MB (standard)	144207-001
1.44 MB (optional)	112565-001

Tape Drives	Spare Part	Tape Cartridge	Spare Part
525-MB ACA	142073-001	525 MB QIC Cartridge	119504-001
1.2 GB Tape Drive	199615-001	1.2 GB QIC Cartridge	199625-001
2/8-GB DAT	142074-001	1.3 GB 60M DDS1	131167-001
		2.0 GB 90 M DDS1	131148-001
		DAT Cleaning Cartridge	131194-001
4-/16-GB TurboDAT	199464-001	4.0 GB120M DDS 2	199496-001
TurboDAT	199466-001	4 Cartridge Magazine	199467-001
Autoloader (internal)		12 Cartridge Magazine	199468-001
10/20 Table Top DLT	199676-001	10/20 GB Data Cartridge	199703-001
		DLT Cleaning Cartridge	199705-001

Cables	Spare Part
Internal SCSI HDD	148589-001
External SCSI Signal	146776-001
Internal SCSI 2-device	148728-001
LED Cables	148585-001
Diskette Drive Signal	190746-001
DualPort Ethernet Loopback	142254-001
Dual AUI Breakout	197134-001
DLT, 6', Standard to Centronix	199714-001
DLT, 6', Wide to Centronix	199780-001
DLT, 18", Daisy Chain (Table Top)	199713-001
DLT Active Terminator	199715-001
50-pin to 68-pin Adapter	189638-001


ROM Information	Spare Part
System ROMPaq	143198-001
Option ROMPaq	142207-001
Drive Backplane ROM	146705-001

Power Supply/Battery	Spare Part
Clock/Battery	149344-001
Power Supply	190144-001
488 Watt Redundant Power Supply	163828-001


PROLIANT 1000

MEMORY UPGRADE CHART 486DX2/66 (ASSEMBLY 003251)

PROCESSOR BOARD - 003251
(16 MB)

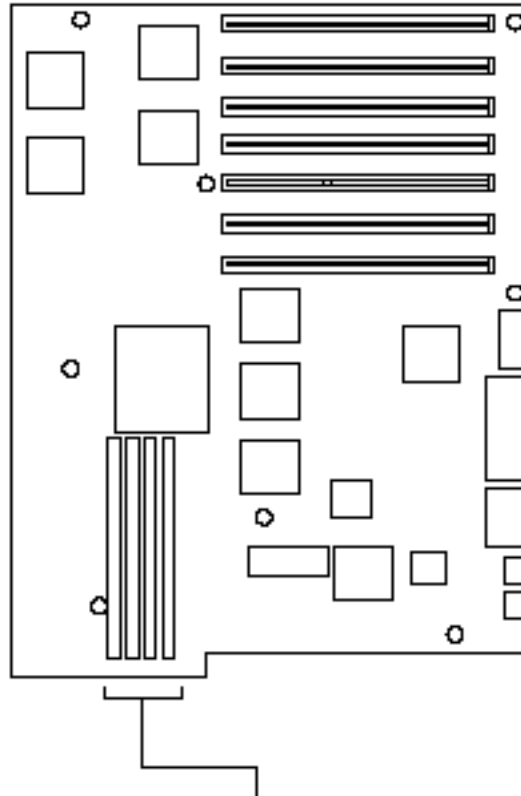

ADD ANY COMBINATION OF THE FOLLOWING MEMORY MODULES,
UP TO 128 MEGABYTES TOTAL SYSTEM MEMORY




- 2-MB 70ns - OPTION PN 141683-001
- 2-MB 80ns - OPTION PN 118689-001
- 4-MB 70ns - OPTION PN 118690-001
- 4-MB 80ns - OPTION PN 136817-001
- 8-MB 70ns - OPTION PN 141685-001
- 8-MB 80ns - OPTION PN 128877-001
- 16-MB 70ns - OPTION PN 190747-001
- 16-MB 80ns - OPTION PN 149320-001
- 32-MB 70ns - OPTION PN 190748-001
- 32-MB 80ns - OPTION PN 149147-001


PROLIANT 1000

MEMORY UPGRADE CHART 5/60 SYSTEM I/O BOARD (ASSEMBLY 004007)

PROCESSOR BOARD - 004007
(16 MB)

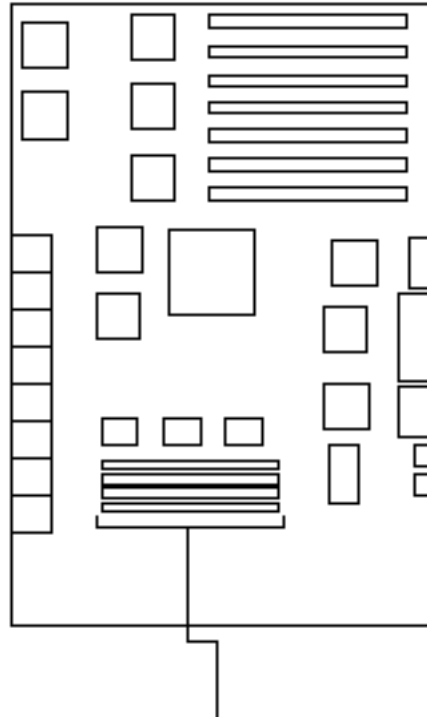

SIMMS MUST BE ADDED IN SETS OF 4 OF THE SAME SIZE AND SPEED
UP TO 144 MEGABYTES TOTAL SYSTEM MEMORY

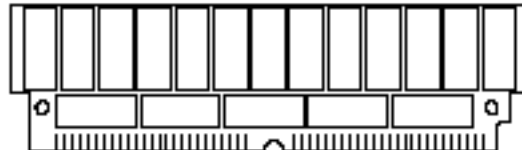

16-MB 70ns (4 x 4MB) - OPTION PN 149949-001

16-MB 80ns (4 x 4MB) - OPTION PN 136816-001

32-MB 70ns (4 x 8MB) OPTION PN 149912-001

32-MB 80ns (4 x 8MB) OPTION PN 136817-001

64-MB 70ns (4 x 16MB) OPTION PN 149913-001

64-MB 80ns (4 x 16MB) OPTION PN 149341-001

128-MB 70ns (4 x 32MB) OPTION PN 149914-001

128-MB 80ns (4 x 32MB) OPTION PN 139918-001