

# Presario 5200

| System Board               | Assembly   | Spare Part | System                                                                       |
|----------------------------|------------|------------|------------------------------------------------------------------------------|
| Processor Board, FP, N/NIC | 352728-101 | 480075-001 | 5202, 04, 20, 21, 22, 25, 40                                                 |
| Processor Board, FP, N/NIC | 320446-101 | 320645-001 | 5201, 02, 04, 22, 23, 25, 30, 35, 40, 41, 42, 43, 45, 48, 50, 53, 80, 82, 83 |
| Processor Board, FP/BX     | 352727-101 | 480077-001 | 5210, 30, 60, 70                                                             |
| Processor Board, FP, N/NIC | 352727-102 | 480078-001 | 5206, 60, 70                                                                 |

## Jumper Settings

| Jumper | Function             | Pins                  | Description                                                                |
|--------|----------------------|-----------------------|----------------------------------------------------------------------------|
| P1     | CMOS Clear           | 1-2 (default)<br>Open | Secure CMOS Power<br>Remove jumper for 10 seconds. Reinstall to clear CMOS |
| P2     | CPU Clock Multiplier | A1-A2<br>B1-B2        | 1.5x                                                                       |
|        |                      | A2-A3<br>B1-B2        | 2.0x                                                                       |
|        |                      | A2-A3<br>B2-B3        | 2.5x                                                                       |
|        |                      | A1-A2<br>B2-B3        | 3.0x                                                                       |
|        |                      |                       |                                                                            |
| P3     | Bus Speed Select     | 1-2                   | 50 MHz CPU Ext. Bus Freq.                                                  |
|        |                      | 2-3                   | 40 MHz CPU Ext. Bus Freq.                                                  |
|        |                      | 3-4                   | 60 MHz CPU Ext. Bus Freq.                                                  |
|        |                      | 4-5                   | 66 MHz CPU Ext. Bus Freq.                                                  |

| Configuration Code | Assembly   | System Board Spare Part | Model |
|--------------------|------------|-------------------------|-------|
| CD94               | 320446-101 | 480075-001              | 5204  |
| CD96               | 320446-101 | 480075-001              | 5202  |
| CFB2               | 352727-102 | 480078-001              | 5206  |
| CFC2               | 352727-101 | 480077-001              | 5210  |
| CFD2               | 320446-101 | 320645-001              | 5253  |
| CFD5               | 320446-101 | 320645-001              | 5248  |
| CFD7               | 320446-101 | 320645-001              | 5250  |
| CFDB               | 320446-101 | 320645-001              | 5230  |
| CFDC               | 320446-101 | 320645-001              | 5245  |
| CFDG               | 320446-101 | 320645-001              | 5242  |
| CFDH               | 320446-101 | 320645-001              | 5240  |
| CFDJ               | 320446-101 | 320645-001              | 5241  |
| CFF3               | 352727-101 | 480077-001              | 5260  |
|                    | 352727-102 | 480078-001              |       |
| CFF4               | 352727-101 | 480077-001              | 5260  |
|                    | 352727-102 | 480078-001              |       |
| CFF5               | 352727-101 | 480077-001              | 5260  |
|                    | 352727-102 | 480078-001              |       |

Continued

# Presario 5200

| Configuration Code | Assembly   | System Board Spare Part | Model |
|--------------------|------------|-------------------------|-------|
| CFG2               | 352727-101 | 480077-001              | 5270  |
|                    | 352727-102 | 480078-001              |       |
| CFG3               | 352727-101 | 480077-001              | 5270  |
|                    | 352727-102 | 480078-001              |       |
| CFG4               | 352727-101 |                         | 5270  |
|                    | 352727-102 | 480078-001              |       |
| CGC3               | 352727-101 | 480077-001              | 5210  |
| CGP2               | 352728-101 | 480075-001              | 5221  |
| CGP3               | 320446-101 | 320645-001              | 5223  |
| CGP4               | 320446-101 | 480075-001              | 5225  |
| CGP5               | 352728-101 | 480075-001              | 5220  |
| CGP6               | 320446-101 | 480075-001              | 5222  |
| CGP7               | 352728-101 | 480075-001              | 5220  |
| CJ62               | 320446-101 | 320645-001              | 5201  |
| CJ68               | 352727-101 | 480077-001              | 5230  |
| CJD2               | 320446-101 | 320645-001              | 5283  |
| CJD3               | 320446-101 | 320645-001              | 5282  |
| CJD4               | 320446-101 | 320645-001              | 5280  |
| GVG3               | 005490-101 | 234707-001              | 5220  |
| GVG4               | 005490-101 | 234707-001              | 5220  |
| GVG8               | 005490-101 | 234707-001              | 5220  |
| GVG9               | 005490-101 | 234707-001              | 5220  |
| GVH3               | 005490-101 | 234707-001              | 5226  |
| HVG2               | 005490-101 | 234707-001              | 5220  |
| HVH2               | 005490-101 | 234707-001              | 5226  |

| Memory               | Assembly   | Spare Part | System                                                                                   |
|----------------------|------------|------------|------------------------------------------------------------------------------------------|
| Video Memory, 4 MB   | 320821-002 | 400431-001 | 5221, 40, 42, 43, 45, 80, 82 (Option – 5202, 04, 20, 22, 25, 40, 42, 45, 48, 50, 70, 80) |
| Video Memory, 4 MB   | 341749-001 | 400431-001 | 5260                                                                                     |
| 32 MB DIMM, 100 MHz  | 320767-101 | 319326-001 | 5235, 41, 45, 60                                                                         |
| 64 MB DIMM, 100 MHz  | 320768-101 | 320670-001 | 5201, 02, 04, 10, 20, 21, 22, 23, 25, 30, 35, 40, 41, 42, 43, 45, 48, 53, 60             |
| 128 MB DIMM, 100 MHz | 381320-101 | 387073-001 | 5206, 42, 50, 70, 80, 82, 83                                                             |

# Presario 5200

| Microprocessor | Assembly   | Spare Part | System                                   |
|----------------|------------|------------|------------------------------------------|
| K6II, 333      | 320471-003 | 337364-001 | 5201                                     |
| K6II, 350      | 320471-005 | 328966-001 | 5202, 04, 40                             |
| K6II, 380      | 330631-003 | 400446-001 | 5220, 21, 22, 23, 25                     |
| K6II, 400/70   | 330631-001 | 320668-001 | 5230, 35, 40, 41, 42, 43, 45, 48, 50, 53 |
| K6II, 400/60   | 387488-001 | 480076-001 | 5230, 35, 40, 42, 43, 45, 50, 53         |
| K6II, 450      | 329074-003 | 400432-001 | 5280, 82, 83                             |
| PII, 400       | 278309-005 | 480076-001 | 5206, 60, 70                             |
| PII, 450       | 278309-003 | 327585-001 | 5270                                     |

| Miscellaneous Internal  | Assembly   | Spare Part | System                                                                                               |
|-------------------------|------------|------------|------------------------------------------------------------------------------------------------------|
| Logo Kit, N. America    |            | 320672-001 | 5202, 04, 20, 22, 24, 25, 26, 40, 42, 45, 48, 50, 70, 80, 82                                         |
| Logo Kit, EMEA          |            | 214338-002 | 5220, 22, 24, 26                                                                                     |
| Logo Kit, APD           |            | 214338-003 | 5220, 22, 24, 26                                                                                     |
| Logo Kit, Latin America |            | 214338-004 | 5220, 22, 24, 26                                                                                     |
| Logo Kit, Japan         |            | 214338-005 | 5220, 22, 24, 26                                                                                     |
| Button Board w/ Bracket | 308882-002 | 320664-001 | 5201, 02, 04, 06, 10, 20, 21, 22, 23, 25, 30, 35, 40, 41, 42, 43, 45, 48, 50, 53, 60, 70, 80, 82, 83 |

| Hard Drives  | Assembly   | Spare Part | System                               |
|--------------|------------|------------|--------------------------------------|
| 4.0 GB, IDE  | 286118-001 | 286248-001 | 5201, 02, 04                         |
| 6.0 GB, IDE  | 352743-001 | 480079-001 | 5210, 21                             |
| 8.0 GB, IDE  | 352744-001 | 400030-001 | 5220, 22, 40                         |
| 8.0 GB, IDE  | 334180-002 | 334719-001 | 5260                                 |
| 10.0 GB, IDE | 356039-001 | 387614-001 | 5223, 25, 30, 40, 41, 42, 53, 60, 70 |
| 12.0 GB, IDE | 352745-001 | 480080-001 | 5225, 35, 43, 45, 48, 50, 80         |
| 13.5 GB, IDE | 178546-001 | 334807-001 | 5206, 70                             |
| 19.2 GB, IDE | 320880-001 | 334788-001 | 5270, 82, 83                         |

| CD-ROM Drives    | Assembly   | Spare Part | System                                   |
|------------------|------------|------------|------------------------------------------|
| CD-ROM, IDE, 32X | 310185-001 | 317212-001 | 5201, 02, 04, 10, 20, 21, 22, 25, 40, 45 |
| CD-ROM, IDE, 40X | 386704-003 | 400028-001 | 5223, 30, 35, 40, 48, 53, 80             |
| DVD4             | 320716-401 | 327446-001 | 5206, 41, 42, 43, 50, 60, 70, 80, 82, 83 |
| DVD5             |            |            | 5282                                     |

| Diskette Drives                | Assembly   | Spare Part | System                                                           |
|--------------------------------|------------|------------|------------------------------------------------------------------|
| 1.44 MB                        |            | 304235-001 | 5201, 02, 04, 20, 21, 23, 40, 42, 43, 45, 48, 50, 53, 80, 82, 83 |
| 1.44 MB                        | 141087-406 | 239612-401 | 5202, 04, 06, 10, 25, 45, 50, 60, 70                             |
| Zip                            | 270928-003 | 328934-001 | 5206, 43, 70, 83                                                 |
| 120 MB/1.44 MB SuperDisk Drive | 184932-402 | 400430-001 | 5220, 22, 30, 35, 40, 41, 42, 48, 80, 82                         |

# Presario 5200

## 56k-bps Modem KAT

| Country                                                                                                                   | Assembly   | Spare Part | System |
|---------------------------------------------------------------------------------------------------------------------------|------------|------------|--------|
| Belgium, Denmark, Finland,<br>France, Germany, Italy,<br>Netherlands, Norway, Portugal,<br>Spain, Sweden, Switzerland, UK | 334790-021 | 334808-021 | 5260   |

## 56k-bps Modem K-PCI

| Country     | Assembly   | Spare Part | System           |
|-------------|------------|------------|------------------|
| Asia        | 352374-001 | 387518-001 | 5270             |
| Australia   | 352374-001 | 387518-001 | 5210, 20, 40, 60 |
| Japan       | 352374-001 | 387518-001 | 5260             |
| New Zealand | 352374-001 | 387518-001 | 5210, 20, 40, 60 |
| PRC         | 352374-001 | 387518-001 | 5204, 70         |
| Taiwan      | 352374-001 | 387518-001 | 5270             |

## Z-56k-bps Modem

| Country        | Assembly   | Spare Part | Cable<br>Spare Part | System                                                        |
|----------------|------------|------------|---------------------|---------------------------------------------------------------|
| Brazil         | 337550-001 | 337559-001 |                     | 5223, 43, 53                                                  |
| Canada         | 337550-001 | 337559-001 |                     | 5204, 20, 30,<br>40, 48, 50, 70                               |
| Caribbean      | 337550-001 | 337559-001 |                     | 5243, 83                                                      |
| Japan          | 337550-001 | 337559-001 |                     | 5201, 04, 40,<br>60, 70                                       |
| Latin America  | 337550-001 | 337559-001 |                     | 5243, 83                                                      |
| LA             | 337550-001 | 337559-001 |                     | 5223, 43, 53                                                  |
| Spanish/Brazil |            |            |                     |                                                               |
| Puerto Rico    | 337550-001 | 337559-001 |                     | 5220, 30, 43                                                  |
| US Retail      | 337550-001 | 337559-001 | 137256-001          | 5202, 04, 20,<br>22, 25, 30, 35,<br>40, 41, 42, 45,<br>80, 82 |

## UDSL/ITU 56K

| Country   | Assembly   | Spare Part | Cable<br>Spare Part | System       |
|-----------|------------|------------|---------------------|--------------|
| US Retail | 339566-001 | 339573-001 | 137256-001          | 5250, 70, 82 |

## Cable Information

|                                     | Spare Part | System                                                                                                                 |
|-------------------------------------|------------|------------------------------------------------------------------------------------------------------------------------|
| Diskette Data/Power Cables          | 177071-001 | 5220, 22, 24, 26                                                                                                       |
| HD/CD ROM Power, Data, Audio Cables | 214335-001 | 5220, 22, 24, 26                                                                                                       |
| Cable Kit                           | 320663-001 | 5201, 02, 04,<br>06, 10, 20, 21,<br>22, 23, 25, 30,<br>35, 40, 41, 42,<br>43, 45, 48, 50,<br>53, 60, 70, 80,<br>82, 83 |

## System ROM

|               | Spare Part | System           |
|---------------|------------|------------------|
| System ROMPaq | 148218-001 | 5220, 22, 24, 26 |

# Presario 5200


| Miscellaneous External | Spare Part | System                                                                               |
|------------------------|------------|--------------------------------------------------------------------------------------|
| Keyboard, US           | 340869-003 | 5202, 04, 06, 20, 22, 25, 30, 35, 40, 41, 42, 45, 50, 70, 80, 82                     |
| Mouse, Ivory           | 196694-301 | 5220, 22, 24, 26                                                                     |
| Mouse, Ivory           | 337416-001 | 5202, 04, 20, 21, 22, 23, 25, 30, 35, 40, 41, 42, 43, 45, 48, 50, 53, 70, 80, 82, 83 |
| Mouse, Scroll/Ivory    | 334689-001 | 5201, 60                                                                             |
| Mouse, Ivory           | 199181-401 | 5206, 10, 60                                                                         |

| Power Supply/Battery                       | Assembly   | Spare Part | System                                                                                               |
|--------------------------------------------|------------|------------|------------------------------------------------------------------------------------------------------|
| 110W                                       | 319239-002 | 317218-001 | 5201, 02, 04, 06, 10, 20, 21, 22, 23, 25, 30, 35, 40, 41, 42, 43, 45, 48, 50, 53, 60, 70, 80, 82, 83 |
| Real-Time Clock Battery, 4.5 Volts, 600 mA |            | 160274-001 | 5220, 22, 24, 26                                                                                     |


# Presario 5200

## Memory Upgrade Chart

PROCESSOR BOARD  
320645-101, 480075-001

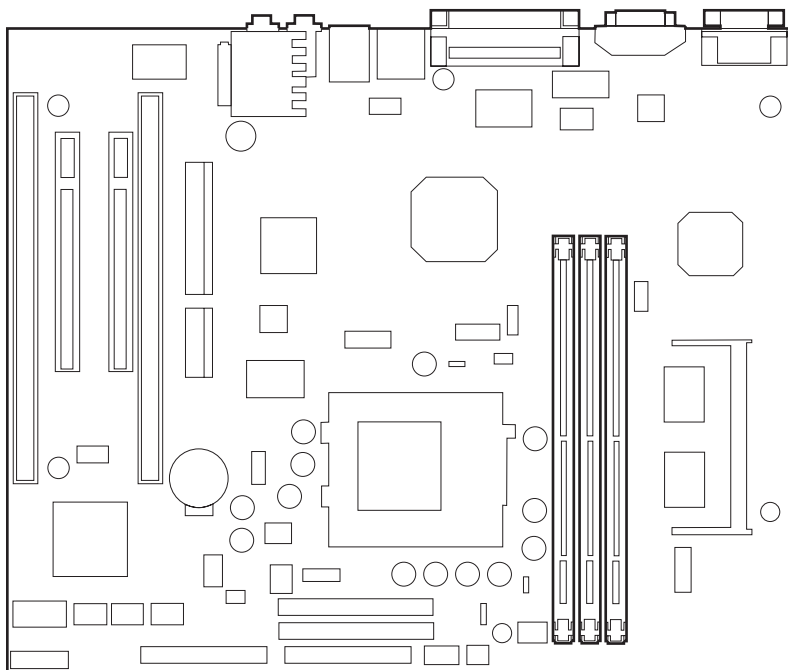

A MAXIMUM OF 384 MB TOTAL MEMORY




- 32-MB 100MHz SDRAM DIMMs - OPTION PN 308875-001
- 64-MB 100MHz SDRAM DIMMs - OPTION PN 308877-001
- 128-MB 100MHz SDRAM DIMMs - OPTION PN 308878-001


# Presario 5200

## Memory Upgrade Chart

PROCESSOR BOARD  
320446--101

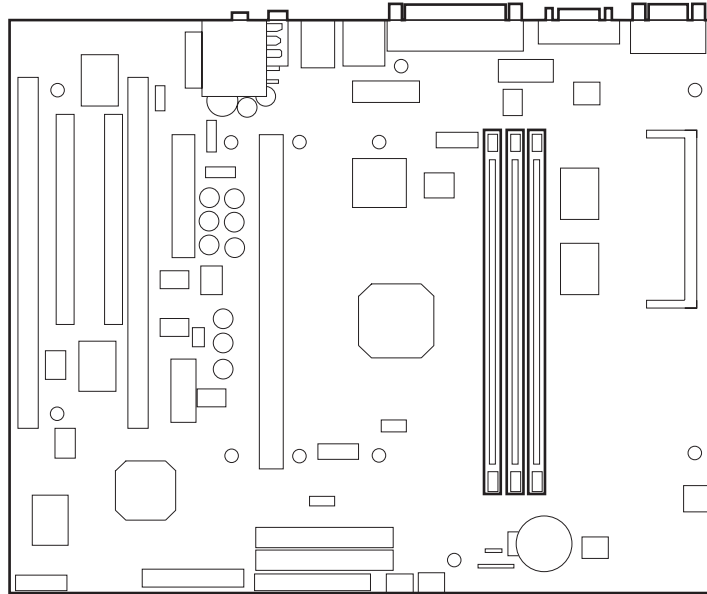

A MAXIMUM OF 384 MB TOTAL MEMORY



MEMORY OPTIONS ARE NOT AVAILABLE