

ProLiant 400

System/Processor Boards	Assembly	Spare Part
System I/O Board	009635-106	388489-001

SW1 Switch Settings (009635)

SW	Default	Description
1	OFF	Embedded video disable
2	OFF	Configuration lock
3	ON	Reserved
4	OFF	Reserved
5	OFF	Reserved
6	OFF	Reserved

Processor Switch Settings

Switch	Switch Position					
Processor	S1	S2	S3	S4	S5	S6
350 MHz	X	OFF	OFF	ON	ON	X
400 MHz	X	ON	ON	OFF	ON	X
450 MHz	X	ON	OFF	OFF	ON	X
500 MHz	X	OFF	ON	OFF	ON	X

ProLiant 400

Model	Processor	Configuration Code
6/350	350/100 MHz	CJS1, CJS2
6/400	400/100 MHz	CJT1, CJT2

Microprocessors	Assembly	Spare Part
350/100 Processor, w/ Heat Sink	278309-001	313623-001
400/100 Processor, w/ Heat Sink	278309-002	313624-001

Memory Boards/Modules	Speed	Assembly	Spare Part
32 MB ECC, SDRAM	100 MHz	323015-001	166968-001
64 MB ECC, SDRAM	100 MHz	323016-001	166967-001
128 MB ECC, SDRAM	100 MHz	323017-001	166965-001

Miscellaneous	Assembly	Spare Part
Drive Adapter, 3.5"	179026-001	166923-001
Power Switch w/ Cable	166784-001	166925-001
Keyboard, Opal	296433-006	386209-001
Server Feature PCI Board	010117-001	388488-001
Fan, 92mm	281811-005	388490-001

Hard Drives	Assembly	Spare Part
4.0 GB, Wide-Ultra SCSI	339512-001	339514-001

CD-ROM Drives	Assembly	Spare Part
32X	179137-701	327659-001

ProLiant 400

Diskette Drives	Assembly	Spare Part
1.44 MB, S-BTN, Opal	141087-702	179161-001


Cables	Spare Part
Miscellaneous Cable Kit	400550-001

Battery/Power Supply	Assembly	Spare Part
Power Supply, 200W	308356-001	166814-001
Battery, Alk, 4.5V	160255-001	160274-001
Battery, Processor Board	298031-001	234556-001


ProLiant 400

Memory Upgrade Chart

SYSTEM BOARD
009635-106
(64MB)

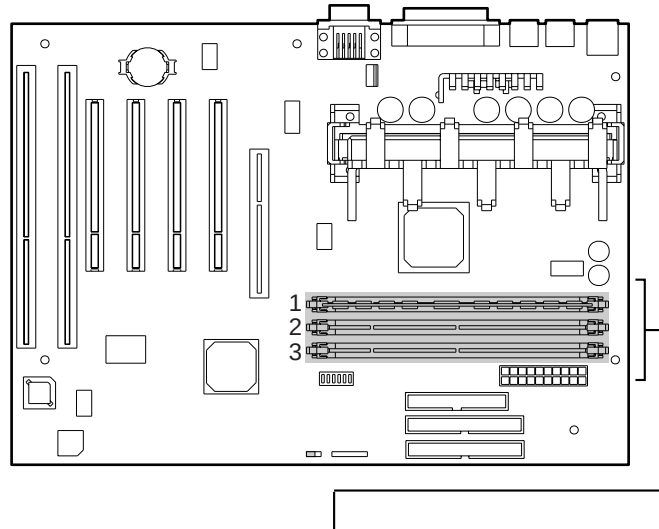

A MAXIMUM OF 384 MB TOTAL MEMORY.
DIMMs MUST BE INSTALLED FIRST IN SOCKET 1,
THEN SOCKET 2, AND THEN SOCKET 3



32-MB 100MHz (ECC) SDRAM DIMMs - OPTION PN 166616-B21

64-MB 100MHz (ECC) SDRAM DIMMs - OPTION PN 166617-B21

128-MB 100MHz (ECC) SDRAM DIMMs - OPTION PN 166618-B21