

ProSignia 200

System/Processor Boards	Assembly	Spare Part
P6, 166/66, w/o Processor	005505-108	273707-001
Processor Board, w/ Tray	007382-101	297040-001

SW1 Bus/Core Frequency Ratio* (005505)

Bus/Core Ratio	Position 1	Position 2	Position 3	Position 4
2/5 (proc speed 166)	OFF	ON	ON	ON

* Incorrect settings can result in permanent processor damage and data loss.

SW2 System Maintenance Switch Settings (005505)

SW	Function	Set to ON	Set to OFF
S1	Diskette Boot Feature Enable	Enables system booting from diskette drive regardless of the configuration setting	Default. System booting from diskette drive is controlled by the config settings
S2	Reserved		Default
S3	Reserved		Default
S4	Configuration Memory Clear	Clears Configuration Memory	Default.

Processor I/O Board Jumper Settings (005505)

Jumper	Function	Settings	Description
E6	Power-on Password	5-6 6-7	Default: Password enabled Password disabled
E9	Battery	9-12	Ext Battery Jumper Connector

ProSignia 200 Configuration Codes

Model	NIC	Processor	Drive	Config. Code
1	Netelligent 10 T PCI UTP	P5/166 MHz	None	BLJ1
1	NIC-PCI 10/100	P5/166 MHz	None	BMW1
1600	Netelligent 10 T PCI UTP	P5/166 MHz	1.6 GB	BLJ2
	NIC-PCI 10/100	P5/166 MHz	1.6 GB	BMW2
2500	Netelligent 10 T PCI UTP	P5/166 MHz	2.5 GB	BLJ3
1600	NIC-PCI 10/100	P5/166 MHz	2.5 GB	BMW3
1, SCSI		PII/300	None	BWP1
4300, SCSI		PII/300	4.3 GB	BWP2

ProSignia 200 Small Business Server Configuration Codes

Model	Description	Processor	Drive	Config. Code
6/300 SMB	Small Business Server	300 MHz PII	4.3 GB Wide-Ultra SCSI-3	BXP2

ProSignia 200

Compaq Remote Access Servers

Model	WAN Connection	Proc.	Drive	Config. Code
RAS 5208	8-port analog 33.6KB/s modem standard. Upgradable to 16 analog ports and ISDN BRI connectivity.	PII 233 MHz	3.2 GB	BTN1
RAS 5218	8-port analog 33.6KB/s modem standard. Upgradable to 16 analog port with additional optional adapter.	PII 300 MHz	4.3 GB	CB53
RAS 5408	8-port ISDN BRI interface. 16-port internal modem that complies with K56flex modem standard. Full modem coverage for both analog and digital calls from remote users.	PII 233 MHz	3.2 GB	BTP1

Microprocessors

Spare Part

P5 166/66 Processor	235229-001
Heat Sink	243128-001
PII/300 w/ Heat Sink	315578-001

Memory Boards/Modules

Speed

Spare Part

8 MB SIMM EDO	60 ns	236513-001
16 MB SIMM EDO	60 ns	243115-001
32 MB SIMM EDO	60 ns	243116-001
32 MB SIMM ECC, Option	60 ns	295805-001
128 MB SIMM, EDO	60 ns	296051-001
512 KB Cache		243117-002

Controller Boards

Assembly

Spare Part

Netelligent 10 T PCI UTP	006064	242501-001
SMART-2/P Wide-Ultra Array Controller *	194799	194751-001
SMART-2/P Array Controller	194770	
Wide-Ultra, PCI, SCSI Controller*	003654-002	272515-001
Dual-Channel Wide-Ultra SCSI-3 Controller	N/A	295626-001
Fast-Wide SCSI-2/P Controller, Option	003654-001	199633-001
Compaq 10 T PCI UTP (Europe only)	004165-003	169811-003
NetFlex-3 100 Base-TX Upgrade Module, Option	004183-001	169805-001
NetFlex-3 VG-AnyLAN Upgrade Module, Option	004189-001	169803-001
10/100 TX PCI UTP, Option	005139-001	169849-001
4/16 TR PCI IBM UTP/STP, Option	199766-001	199764-001
NIC 10/100 Class B	004165-003	169811-003
NIC 100 Base-X	005240	225436-001
PCI Graphics Adapter	296361-001	292994-001

* Ultra speeds not supported externally. Ultra drives will operate at Fast-Wide speeds.

ProSignia 200

Miscellaneous	Assembly	Spare Part
Backplane w/ Brace	247171-004	243190-002
Backplane w/ I/O Brace		297036-001
System Fan		273774-001
Blower Assembly		312371-001
Keyboard, U.S. English		160648-001
Netelligent 56K ISA Fax Modem *		294912-001
8-Port Analog Modem Adapter Board (RAS 5208 only)		295758-001
8-Port ISDN BRI Adapter Board (RAS 5208, 5408)		170212-001
16-Port Digital Modem Adapter Board (RAS 5208, 5408)		323661-001

4. 6/300 Small Business Server only.

Hard Drives	Spare Part
3.8 GB WD IDE	283860-001
2.5 GB WD IDE	273739-001
1.6 GB WD IDE	273738-001
4 GB Wide-Ultra SCSI-3, 1"	269272-001

Non Hot-Pluggable SCSI Hard Drives	Spare Part
9.1 GB Wide-Ultra SCSI 1.6"	199886-001
9.1 GB Fast-SCSI-2 1.6" ¹	199885-001
4.3 GB Wide-Ultra SCSI 1"	242606-001
4.3 GB Fast-Wide SCSI-2 1.6"	199599-001
4.3 GB Fast-SCSI-2 1.6" ¹	199585-001
2.1 GB Wide-Ultra SCSI 1"	242604-001
2.1GB Fast-Wide SCSI-2 1.6"	199644-001
2.1 GB Fast-SCSI-2 1.6" ¹	142272-001

4. Requires Option Fast-SCSI-2 Controller or adapter, and cabling.

CD-ROM Drives	Spare Part
8X, IDE	295934-001
16X	278791-001

Diskette Drives	Spare Part
3.5", 3-Mode	160788-201
1.44 MB Diskette Drive	147243-001

Tape Drives	Spare Part	Tape Cartridge	Spare Part
525-MB ACA	142073-001	525 MB QIC Cart.	119504-001
1.2 GB Tape Drive	199615-001	1.2 GB QIC Cart.	199625-001
2/8-GB DAT Clam Gray	142074-001	1.3 GB 60 M DDS1	131167-001
		2.0 GB 90 M DDS1	131148-001
		DAT Cleaning Cart.	131194-001
2/8-GB DAT Beach Gray	142074-201	1.3 GB 60 M DDS1	131167-001
		2.0 GB 90 M DDS1	131148-001
		DDS1 Cleaning Cart.	131194-001
2/4-GB DAT	142074-201	1.3 GB 60 M DDS1	131167-001
		2.0 GB 90 M DDS1	131148-001
		DDS1 Cleaning Cart.	131194-001
4/16-GB TurboDAT Clam Gray	199464-001	4.0 GB 120M DDS2	199496-001
		DDS2 Cleaning Cart.	242618-001

Continued

ProSignia 200

Tape Drives	Spare Part	Tape Cartridge	Spare Part
4/16-GB TurboDAT Beach Gray	199464-201	4.0 GB 120M DDS2 DDS2 Cleaning Cart.	199496-001 242618-001
4/8-GB DAT	295163-001	4.0 GB 120M DDS2 DDS2 Cleaning Cart.	199496-001 242618-001
4/8-GB SLR *	340591-001		
TurboDAT Autoloader (internal) Clam Gray	199466-001	4 Cartridge Magazine 12 Cartridge Magazine	199467-001 199468-001
TurboDAT Autoloader (internal) Beach Gray	199466-201	4 Cartridge Magazine 12 Cartridge Magazine	199467-001 199468-001
10/20 Table Top DLT	199676-001	10/20 GB Data Cart.	199703-001
10/20 Internal DLT	199746-001	DLT Cleaning Cart.	199705-001
15/30 Table Top DLT	242469-001	15/30 GB Data Cart.	242467-001
15/30 Internal DLT	242468-001	DLT Cleaning Cart.	199705-001
35/70 Table Top DLT	242854-B21	35/70 GB Data Cart.	295394-001
35/70 Internal DLT	242853-B21	DLT Cleaning Cart.	199705-001

* 6/300 Small Business Server only.

Upgrade Path for Remote Access Server 5208*		
Remote Access Server 5208	Slot 1	Slot 2
Base Configuration	8-Port Analog Modem	--
Upgrade (1)	8-Port Analog Modem	8-Port Analog Modem
Upgrade (2)	8-Port Analog Modem	8-Port ISDN BRI
Upgrade (3)	8-Port ISDN BRI	16-Port Digital Modem
(1) The server is expanded to 16 analog ports total. (2) The server is expanded to support digital calls (up to 16) in addition to the original 8 analog calls. (3) The server is configured to a RAS 5408 (the original 8-port analog modem adapter is removed).		

* There is no upgrade path for RAS 5408.

Cables	Spare Part
Diskette/Fixed Disk Drive Cable	247487-001
50-Pin to 68-Pin Adapter, Standard-to-Wide	189638-001
68-Pin to 50-Pin Adapter, Wide-to-Standard	189631-001
SCSI Cable w/ Terminator	273716-001
IDE, 3-pos, 18"	247568-001
Diskette Drive Cable	166506-001


ROM Information	Spare Part
System ROMPaq	

Power Supply	Spare Part
Battery Alk, 4.5v, 600ma, RTC	160274-001
Power Supply, 200 W	247134-002
Power Supply, 280 W	269195-001

ProSignia 200

Memory Upgrade Chart

PROCESSOR I/O BOARD
005505
(16 MB)

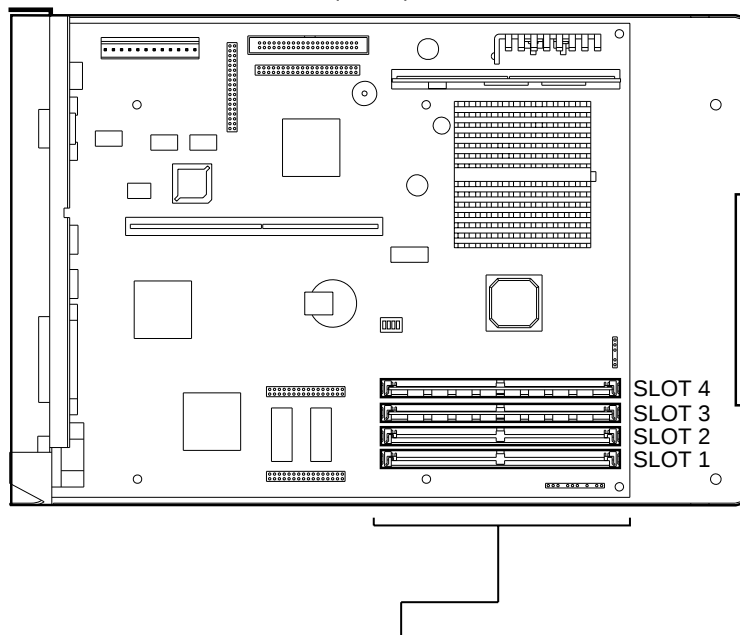

A MAXIMUM OF 128-MB TOTAL MEMORY



16-MB EDO 60ns SIMMS (2 x 8MB)
OPTION PN 243012-002

32-MB EDO 60ns SIMMS (2 x 16MB)
OPTION PN 243013-002

64-MB EDO 60ns SIMMS (2 x 32MB)
OPTION PN 243014-002

32-MB ECC 60ns SIMMS (2 x 16MB)
OPTION PN 186794-B21

64-MB ECC 60ns SIMMS (2 x 32MB)
OPTION PN 186795-B21

128-MB ECC 60ns SIMMS (2 x 32MB)
OPTION PN 296050-B21

NOTES: DO NOT MIX ECC AND EDO SIMMS.
128 MB MEMORY UPGRADES CANNOT BE MIXED WITH OTHER CAPACITY SIMMS