

ProSignia PII 233/266/300

System/Processor Boards	Assembly	Spare Part
Processor Board w/ Tray	007382-101	297040-001

SW1 System Maintenance Switch Settings (007382)

SW	Function	Set to ON	Set to OFF
S1	Password Defeat	Clears Password	Default
S2	Memory Clear	Clears Memory	Default
S3	Diskette Boot Override	System can be booted from diskette drive regardless of System Configuration settings.	Default

SW2 100TX NIC Upgrade Switch Settings (007382)

Switch Settings	Function
All ON	10 MB/s Mode
All OFF	100 MB/s Mode

SW3 Host Bus Speed Switch Settings (007382)

Host Bus Frequency	S1	S2	S3	S4
50 MHz	ON	ON	ON	ON
60 MHz	ON	OFF	ON	OFF
66.6 MHz	OFF	ON	OFF	ON

SW3 Speed-to-Host Bus Ratio Switch Settings (007382)

Processor/Bus	S5	S6	S7	S8
4/2	ON	ON	ON	ON
5/2	ON	ON	ON	OFF
6/2	ON	ON	OFF	ON
7/2	ON	ON	OFF	OFF

ProSignia 200 Configuration Codes

Model	Processor	Drive	Config. Code
1-EIDE	P2/233 MHz	None	BPZ1
3200-EIDE	P2/233 MHz	3.2 GB	BPZ2
SCSI	P2/233 MHz	None	BP21

Microprocessors

Microprocessors	Spare Part
P233 w/ Heat Sink	297030-001
P266 w/ Heat Sink	298773-001
P300 w/ Heat Sink	315578-001

Memory Boards/Modules

Memory Boards/Modules	Speed	Spare Part
8 MB SIMM EDO	60 ns	236513-001
16 MB SIMM EDO	60 ns	243115-001
32 MB SIMM EDO	60 ns	243116-001
64 MB SIMM FPM	60 ns	295804-001
128 MB SIMM FPM	60 ns	296051-001

Continued

ProSignia PII 233/266/300

Memory Boards/Modules	Speed	Option Kit
16 MB SIMM EDO (2 x 8)	60 ns	243012-002
32 MB SIMM EDO (2 x 16)	60 ns	243013-002
64 MB SIMM EDO (2 x 32)	60 ns	243014-002
32 MB SIMM ECC FPM (2 x 16)	60 ns	186794-B21
64 MB SIMM ECC FPM (2 x 32)	60 ns	186795-B21
128 MB SIMM ECC FPM (2 x 64)	60 ns	296050-B21

Controller Boards	Assembly	Spare Part
Netelligent 10 T PCI UTP	006064-001	242501-001
SMART-2/P Wide-Ultra Array Controller *	194799-001	194754-001
SMART-2/P Array Controller	194770-001	
Wide-Ultra Controller*	003654-002	272515-001
Fast-Wide SCSI-2/P Controller, Option	003654-001	199633-001
PCI Graphics	296361-001	292994-001
Compaq 10 T PCI UTP (Europe only)	004165-003	169811-003
NetFlex-3 100 Base-TX Upgrade Module, Option	004183-001	169805-001
NetFlex-3 VG-AnyLAN Upgrade Module, Option	004189-001	169803-001
10/100 TX PCI UTP, Option	005139-001	169849-001
4/16 TR PCI IBM UTP/STP, Option	199766-001	199764-001
NIC 10/100 Class B	219240-001	219414-001
NIC 100 Base-X	005240	225436-001

* Ultra speeds not supported externally. Ultra drives will operate at Fast-Wide speeds.

Miscellaneous	Assembly	Spare Part
Backplane Board w/ Brace	007385-001	297036-001
System Fan	292958-001	312371-001
Power Supply	269194-001	269195-001
Front Bezel	273735-001	273757-001
5.25" Hard Drive Mounting Bracket		243231-001
Misc. Hardware Kit		297037-001
Misc. Plastics Kit		297039-001
Keyboard, U.S. English	160650-101	160648-101

Hard Drive	Assembly	Spare Part
3.2 GB EIDE	270829-002	312369-001
5.1 GB EIDE	270948-002	312376-001

Non Hot-Pluggable SCSI Hard Drives	Spare Part
9.1 GB Fast-SCSI-2 3.5" ¹	199885-001
9.1 GB Wide-Ultra SCSI 1.6"	199886-001
4.3 GB Wide-Ultra SCSI 1"	242606-001
4.3 GB Fast-Wide SCSI-2 1.6"	199599-001
4.3 GB Fast-SCSI-2 1.6" ¹	199585-001
2.1 GB Wide-Ultra SCSI 1"	242604-001
2.1 GB Fast-Wide SCSI-2 1.6"	199644-001
2.1 GB Fast-SCSI-2 1.6" ¹	142272-001

¹ Requires Option Fast-SCSI-2 Controller or adapter, and cabling.

CD-ROM Drives	Spare Part
16X, IDE, Slot	286037-001

ProSignia PII 233/266/300

Diskette Drives	Spare Part
3.5", 3-Mode	147243-001

Tape Drives	Spare Part	Tape Cartridge	Spare Part
525-MB ACA	142073-001	525 MB QIC Cart.	119504-001
1.2 GB Tape Drive	199615-001	1.2 GB QIC Cart.	199625-001
2/8-GB DAT Clam Gray	142074-001	1.3 GB 60 M DDS1	131167-001
		2.0 GB 90 M DDS1	131148-001
		DAT Cleaning Cart.	131194-001
2/8-GB DAT Beach Gray	142074-201	1.3 GB 60 M DDS1	131167-001
		2.0 GB 90 M DDS1	131148-001
		DDS1 Cleaning Cart.	131194-001
2/4-GB DAT	142074-201	1.3 GB 60 M DDS1	131167-001
		2.0 GB 90 M DDS1	131148-001
		DDS1 Cleaning Cart.	131194-001
4/16-GB TurboDAT Clam Gray	199464-001	4.0 GB 120M DDS2	199496-001
		DDS2 Cleaning Cart.	242618-001
4/16-GB TurboDAT Beach Gray	199464-201	4.0 GB 120M DDS2	199496-001
		DDS2 Cleaning Cart.	242618-001
4/8-GB DAT	295163-001	4.0 GB 120M DDS2	199496-001
		DDS2 Cleaning Cart.	242618-001
TurboDAT Autoloader (internal) Clam Gray	199466-001	4 Cartridge Magazine	199467-001
		12 Cartridge Magazine	199468-001
TurboDAT Autoloader (internal) Beach Gray	199466-201	4 Cartridge Magazine	199467-001
		12 Cartridge Magazine	199468-001
10/20 Table Top DLT	199676-001	10/20 GB Data Cart.	199703-001
10/20 Internal DLT	199746-001	DLT Cleaning Cart.	199705-001
15/30 Table Top DLT	242469-001	15/30 GB Data Cart.	242467-001
15/30 Internal DLT	242468-001	DLT Cleaning Cart.	199705-001
35/70 Table Top DLT	242854-B21	35/70 GB Data Cart.	295394-001
35/70 Internal DLT	242853-B21	DLT Cleaning Cart.	199705-001

Cables	Spare Part
Diskette Drive Cable	147243-001
CD-ROM/IDE, 2-Cable Kit	247568-001
68-Pin to 50-Pin Adapter, Wide-to-Standard	189631-001
50-Pin to 68-Pin Adapter, Standard-to-Wide	189638-001
SCSI Cable w/ Terminator	273716-001


ROM Information	Spare Part
System ROMPaq	142198-001

Power Supply	Spare Part
Battery	160274-001
Power Supply, 200 W	269195-001

ProSignia PII 233/266/300


Memory Upgrade Chart

I/O BOARD
007382-101
32MB EDO Standard Memory

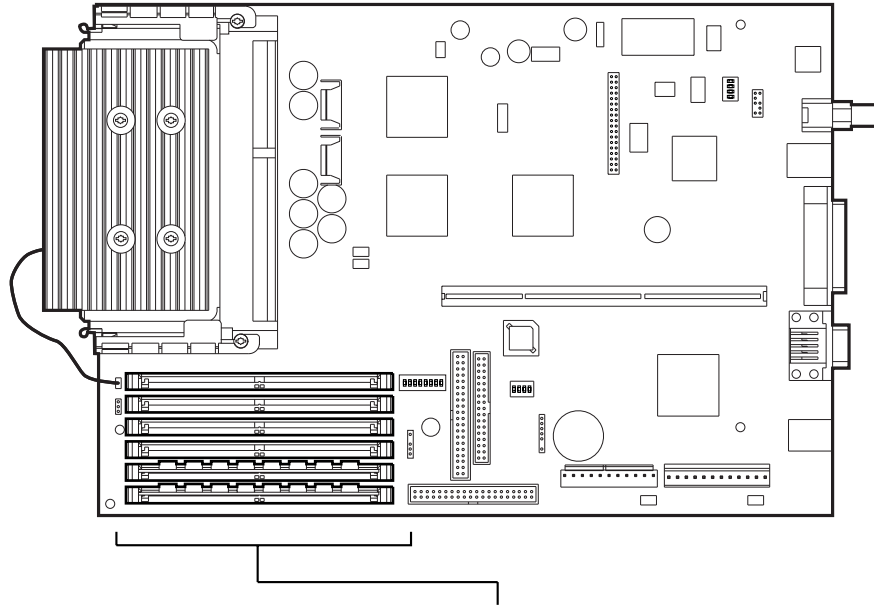

A MINIMUM OF 32 MB MUST BE INSTALLED TO OPERATE.
A MAXIMUM OF 193 MB EDO TOTAL MEMORY
A MAXIMUM OF 384MB FastPage Mode ECC TOTAL MEMORY

NOTE: SIMMS MUST BE ADDED IN MATCHED PAIRS OF
THE SAME SIZE AND SPEED. EDO AND FastPage Mode MEMORY
SHOULD NOT BE MIXED AT THE SAME TIME.



16-MB EDO 60ns (2 x 8) SIMMS, EDO - OPTION PN 243012-002

32-MB EDO 60ns (2 x 16) SIMMS, EDO - OPTION PN 243013-002

64-MB EDO 60ns (2 x 32) SIMMS, EDO - OPTION PN 243014-002

32-MB ECC FastPage 60ns (2 x 16) SIMMS - OPTION PN 186794-B21

64-MB ECC FastPage 60ns (2 x 32) SIMMS - OPTION PN 186795-B21

128-MB ECC FastPage 60ns (2 x 64) SIMMS - OPTION PN 296050-B21