

SYSTEMPRO/LT

System Boards	Assembly	Spare Part
386/25 Processor	002028/ 002292	129157-001
386/33 Processor	002031	129419-001
486SX/25 Processor	002316 /002300	129126-001
486/33 Processor	002319 /002297	129127-001
486DX2/66 Processor	002431	129430-001
486DX2/50 Processor	002025	129128-001
System Board	002268	134875-001

SW500 Switch Settings (System Board 002268)

1	2	3	4	5	6	Function
OFF						Reserved
	OFF *					Unlock EISA configuration
	ON					Lock EISA configuration
		OFF *				Enable diskette write
		ON				Disable diskette write
			OFF *			Diskette drive as boot drive determined by EISA configuration settings
			ON			Enable diskette drive as boot drive regardless of EISA configuration setting
				OFF *		Enable user password protection
				ON		Disable user password protection and remove old password
					OFF *	Enable EISA configuration
					ON	Disable EISA configuration

* Default.

Switch Settings (486SX/25 Processor 002316, 002300)

Switch	Setting	Function
S1	OFF *	Reserved
S2	OFF *	487 coprocessor not installed
S2	ON	487 coprocessor installed
S3	OFF *	487 coprocessor not installed
S3	ON	487 coprocessor installed

* Default.

Switch Settings (486/33 Processor 002319, 002297)

Switch	Setting	Function
S1	ON	Reserved
S2	OFF	Reserved
S3	ON	Reserved

Memory Board/Module	Assembly	Spare Part
Memory Expansion Board	002071	129129-001
1 MB Memory Module	118666	118740-001
2 MB Memory Module	118667	113923-001
4 MB Memory Module	137854/118665	118741-001
8 MB Memory Module	137853	128954-001
	129041	

SYSTEMPRO/LT

Controller Boards	Assembly	Spare Part
SMART Controller	002969	142130-001
	003596	181132-001
Fast SCSI-2 Controller	002682	142040-001
Fast-Wide SCSI-2/E Controller	003529	199634-001
NetFlex Controller	002709	142041-001
NetFlex Controller Token Ring Module	142035	142042-001
NetFlex-2 ENET-TR Controller	003382	142222-001
NetFlex-2 DualPort ENET Controller	003101	142151-001
NetFlex-2 TR Controller	003647	199521-001
NetFlex-2 DualPort TR Controller	003104	142195-001
NetFlex-3/E Controller	004162	169801-001
NetFlex-3/P Controller	004165	169811-001
NetFlex-3 100 Base-TX Upgrade Module	004183	169805-001
NetFlex-3 100 VG-AnyLAN Upgrade Module	004189	169803-001

Video Boards	Assembly	Spare Part
Advanced VGA Board	002340/002220	126656-001
QVision 1024/E Controller *	001924	126654-001

* See Volume 2 Appendix, Multiproduct Boards, for settings.

Miscellaneous Boards	Assembly	Spare Part
Serial/Parallel Interface ⁴	000570	106886-001
	000990	
2400-Baud Internal Modem	001070	Not Available
9600/2400 Fax Modem		197458-001
SpeedPaq 144/I Data and Fax Modem ⁵	003002	147453-001
Server Manager/R ^{1, 2}	001897	125726-001
Server Manager/R ³	001897	125745-001

¹ Sold and serviced only by qualified Authorized Compaq Resellers.

² Available in the US and Canada.

³ Available outside of the US and Canada.

⁴ See Volume 2 Appendix, Multiproduct Boards, for settings.

⁵ See Volume 2 Appendix, Modem Configuration Information.

SYSTEMPRO/LT

Stand Alone Hard Drives

Size	Type	Inter-leave	Integrated	Mini ROM	Spare Part	Controller Assembly
120 MB	50	1:1	Y	081491	116806-001	Not Available
210 MB	51	1:1	Y	081491	124013-001 ² 162096-001 ^{3,4}	Not Available
320 MB	28	1:1	N	081491	115182-001 ² 111918-001 ³	WD1009
340 MB	63	1:1	Y	080291	128141-001	Not Available
510 MB	61	1:1	Y	080291	128142-001	Not Available
650 MB	41 ¹	1:1	N	081491	115181-001 ² 111886-001 ³	001628
1.05 GB SCSI	N/A	1:1	Y	N/A	142039-001	Not Available
Hard Drive Expansion Unit						WD1009/ 001628/ WD1009

¹ Drive Type 49 with MS-DOS, Drive Type 42 with OS/2, Drive Type 41 with operating systems from SCO.

² Except Europe.

³ Europe only.

⁴ IDE.

Hard Drive Array Pairs

Size	Array	Min ROM	Spare Part ^{1, 2}	Controller Assembly
120 MB	240 MB	060591	116806-001	001373/002037
210 MB	420 MB	060591	116805-001 161956-001 ^{3,4}	001373/002037
340 MB	680 MB	060591	139964-001	001373/002037
510 MB ⁵	1.02 GB	060591	139965-001	001373/002037
Intelligent Array Expansion System				001852

¹ Spare part numbers are for individual hard drives used in drive array pairs. Spare kits *do not* contain mounting hardware.

² Hard Drive Array Mounting Bracket spare part number 128180-001.

³ Europe Only.

⁴ IDA, IDA2.

⁵ Thermal upgrade kit 162211-001 must be used if 3 or more 510MB drives are installed.

Tape Drives	Spare Part	Tape Cartridge	Spare Part
80/120 MB *	131337-001	80 MB (DC2080)	116966-001
(1/3 height)		120 MB (DC2120)	116967-001
80/120 MB *	122087-001	80 MB (DC2080)	116966-001
(1/2 height)		120 MB (DC2120)	116967-001
120/250 MB *	197490-001	120 MB (DC2120)	116967-001
(1/2 height)			
150-/250-MB	115220-001	150 MB (DC600XTD)	113234-001
		250 MB (DC6250)	115298-001
320-/525-MB	116804-001	320 MB (DC6320)	119505-001
		525 MB (DC6525)	119504-001
1.3-/2.0-GB	131149-001	1.3 GB	131167-001
DAT		2.0 GB	131148-001
		DAT Cleaning Cartridge	131194-001

* With compression.

SYSTEMPRO/LT

Diskette Drives	Spare Part
360 KB	112567-001
1.2 MB	112566-001
1.44 MB *	112565-001

* Requires MS-DOS Version 3.31 Revisions A (or later) if installed as drive B, and MS-DOS Version 3.31 Revisions B (or later) if installed as drive A.

CD-ROM Drives	Spare Part
Tray Load CD-ROM (internal)	142223-001
Tray Load CD-ROM (external)	199430-001

Cables				
Cable Function	Where Used	Spare Part	Description	
Diskette/Tape Power	Diskette Locations Q1/Q2/ Q3 80/120 MB Tape	116939-001	10-inch	
Diskette/Tape Signal	Diskette Locations Q1/Q2/ Q3 80/120 MB Tape	116940-001	12-inch	
Hard Drive Power	Single Hard Drive	120591-001	15-inch	
Hard Drive Signal	Single Hard Drive	119510-001	15-inch	
Hard Drive Power	Hard Drive Locations L1 & L2 Dual	116936-001		
Hard Drive Signal	Hard Drive Locations L1 & L2 Dual	116942-001	8-inch	
Hard Drive Signal	Hard Drive Locations L3 & L4 Rear Dual	116937-001	11-inch	
Hard Drive Power	Hard Drive Locations L3 & L4 Dual	116935-001		
Hard Drive Signal	Hard Drive Locations L3 & L4 Front Dual	116938-001	10-inch	
Dual AUI Breakout		197134-001		
DualPort ENET Loop		142254-001		
Tape Power	150-/250-MB Tape 320-/525-MB Tape	116932-001	15-inch	
Tape Power	1.3-/2.0-GB Tape	120591-001		
Tape Signal	150-/250-MB Tape	116931-001	24-inch	
Tape Signal	320-/525-MB Tape 1.3-/2.0-GB Tape	116933-001	24-inch	

Processor/Coprocessor Locations		
Processor Board	Processor Location	Coprocessor Location
386/25 (002028, 002292)	U8	U22
486SX/25 (002316, 002300)	U7	N/A
486/33 (002319, 002297)	U7	N/A
486DX2/50 (002025)	U1	U2

SYSTEMPRO/LT

System ROM Location (System Board 002268)

U61

System ROM Revisions (Spare Part 137302-001)


Revision	Number on ROM
080291	129186-004
081491	129186-006
092791	129186-007
012392	139773-002
022592	139773-003
052892	139995-001
062692	139995-002
043093	139995-003

Power Supply/Battery	Spare Part
Power Supply	116798-001
Battery/Clock Module	126570-001

SYSTEMPRO/LT


MEMORY UPGRADE CHART

PROCESSOR BOARD
4 OR 8 MEGABYTES

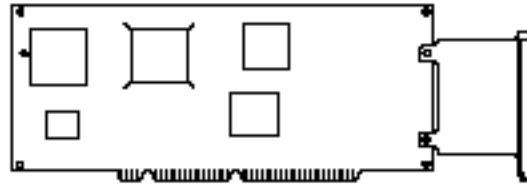


ADD

MEMORY EXPANSION BOARD
OPTION PN 129160-001

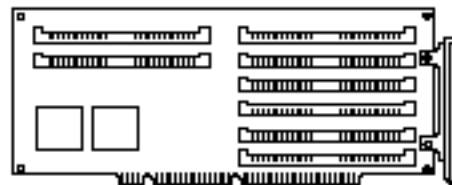


ADD ANY COMBINATION OF THE FOLLOWING MEMORY MODULES:


1-MB MEMORY MODULE - SPARE PN 118740-001




2-MB MEMORY MODULE - OPTION PN 118689-001



4-MB MEMORY MODULE - OPTION PN 118690-001



8-MB MEMORY MODULE - OPTION PN 128877-001



MAXIMUM SYSTEM MEMORY IS 64 MB.