

ProLiant ML370

System Boards	Assembly	Spare Part
System I/O Board	010156-10X	157824-001

SW2 Switch Settings

SW	Function	Set to On*	Rack Default	Tower Default
1	Embedded Video Disable	Disables embedded video.	Off	Off
2	Configuration Lock	Locks the system configuration.	Off	Off
3	Rack Mount	Defaults to rack-mount configuration.	On	Off
4	Diskette Drive Override	Overrides configuration and allows booting from diskette.	Off	Off
5	Password Disable	Disable power-on password.	Off	Off
6	Maintenance	Places system in maintenance mode for testing.	Off	Off

*On activates the function.

Configuration Code	Model	System Board Spare Part
FNB1	Tower, 600 MHz	157824-001
FNC1	Rack, 600 MHz	157824-001
DKF1	Tower, 667 MHz	157824-001
DKG1	Rack, 667 MHz	157824-001
DKH1	Tower, 733 MHz	157824-001
DKJ1	Rack, 733 MHz	157824-001
FBHZ	CTO Base Unit	157824-001
FD61	Tower, 800 MHz	157824-001
FD71	Rack, 800 MHz	157824-001
FD81	Tower, 866 MHz	157824-001
FD91	Rack, 866 MHz	157824-001
FKZ1	Tower, 933 MHz	157824-001
FLB1	Rack, 933 MHz	157824-001
FRY1	Tower, 1000 MHz	157824-001
FRZ1	Rack, 1000 MHz	157824-001

Microprocessors	Assembly	Spare Part
600/133 MHz, w/ Heat Sink	137365-008	166146-001
667/133 MHz, w/ Heat Sink	137365-002	166109-001
733/133 MHz, w/ Heat Sink	137365-004	166108-001
800/133 MHz, w/ Heat Sink	137365-011	187781-001
866/133 MHz, w/ Heat Sink	137365-006	187782-001
933/133 MHz, w/ Heat Sink	137365-012	196628-001
1000/133 MHz, w/ Heat Sink	137365-307	216472-001

Memory Boards/Modules	Assembly	Spare Part
64 MB DIMM, SDRAM	127004-021	159225-001
128 MB DIMM, SDRAM	127007-021	159226-001
128 MB Module, SDRAM	127007-031	164278-001

Continued

ProLiant ML370

Memory Boards/Modules	Assembly	Spare Part
256 MB DIMM, SDRAM	127005-021	159304-001
256 MB DIMM, SDRAM	127005-031	159377-001
512 MB, DIMM, SDRAM	127006-031	159227-001
512 MB, DIMM, SDRAM, 256	127006-041	177628-001
1 GB, SDRAM	127008-041	163902-001

Miscellaneous	Assembly	Spare Part
Baffle	161486-001	163364-001
Bezel, Front		217492-001
Bezel, Rack	185765-003	163489-001
Bezel, Tower	250997-005	217492-001
Board, Backplane, SCSI	010063-001	163903-001
Board, Riser, PCI, 6 Slots	010162-001	157925-001
Board, ROC Raid, 16 MB	010284-001	158855-001
Caster, Feet	292936-001	333575-001
Chassis	103975-001	157986-001
Conversion Kit, Rack		163490-001
Display, Integrated Management	127409-B21	122223-001
Drive Cage, LVD, 6 Drive Capability, PCA w/ Cage	382163-001	387089-001
Fan Assembly, 92mm, I/O Fan	327412-003	173907-001
Fan Assembly, 120mm, Rear Fan	298240-004	212944-001
Feet, Opal	292396-002	387759-001
Hardware Kit, Miscellaneous	163737-009	281847-001
Keyboard, Opal (EURPs)	296433-006	386209-001
PCI Card Guide	203287-001	196627-001
Panel Kit, Miscellaneous	264316-003	387762-001
Plastics Kit, Miscellaneous	327324-002	140479-001
Power Switch w/ LED and Cable	333347-004	157928-001
Spacer, Autoloader		215843-001
Voltage Regulator Board	155681-001	157825-001

*Only end-user replaceable parts (notated EURPs) are orderable by Tech Support.

Hard Drives	Assembly	Spare Part
Blank Tray	349448-001	122759-001

CD-ROMs	Assembly	Spare Part
32X	179137-701	327659-001
40X	177992-001	179963-001

Diskette Drives	Assembly	Spare Part
1.44 MB, Opal	141087-705	179161-001


Cables	Assembly	Spare Part
Cable Kit, Miscellaneous Data	270267-002	386559-001
Cable Kit, Miscellaneous Power	157818-001	158529-001
Cable Kit, Miscellaneous Signal	242947-015	158530-001

Battery/Power Supply	Assembly	Spare Part
Battery, 3V, 540m, Ah, Lithium, CR2450N	334149-001	179322-001
Power Supply, 325W	480082-001	402151-001


ProLiant ML370

Memory Upgrade Chart

SYSTEM BOARD
157824-001
(128 MB)

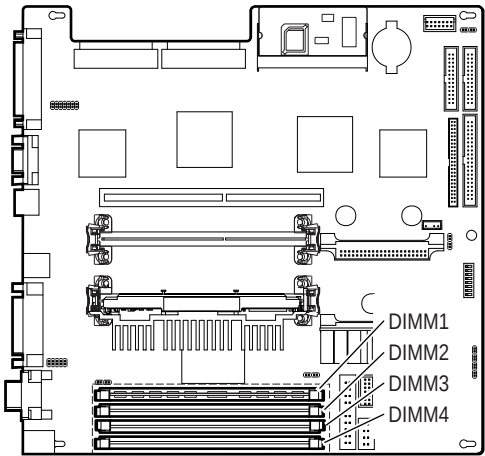

A MAXIMUM OF 4 GB TOTAL MEMORY



64-MB 133 MHz SDRAM DIMMs	OPTION PN 128276-B21
128-MB 133 MHz SDRAM DIMMs	OPTION PN 128277-B21
256-MB 133 MHz SDRAM DIMMs	OPTION PN 128278-B21
512-MB 133 MHz SDRAM DIMMs	OPTION PN 128279-B21
1-GB 133 MHz SDRAM DIMMs	OPTION PN 128280-B21

NOTE: The ProLiant ML370 will support 1-GB DIMMs when available