

ProSignia VS

System Boards	Assembly	Spare Part
486DX/33 SCSI, ENET	003513	199124-001 DISCONTINUED
486DX2/66 SCSI, ENET	003537	199125-001 DISCONTINUED
486SX/33 SCSI, ENET	003535	199126-001 DISCONTINUED
486DX/33 SCSI, TR	003742	199172-001 DISCONTINUED
486DX2/66 SCSI, TR	003694	199120-001 DISCONTINUED
256K Cache Board w/o Bracket	003560	194380-001

System Board (003513, 003537, 003535, 003742, 003694)

SW2	System Board SW2 Maintenance Settings	Position	Status
S1	VIDEO DISABLE: This switch is ignored and the integrated video is disabled if ROM detects an installed optional video board.	OFF*	ENABLED
		ON	DISABLED
S2	CONFIGURATION LOCK: System configuration cannot be changed when this switch is enabled	OFF*	DISABLED
		ON	ENABLED
S3	RESERVED	OFF*	
S4	DISKETTE BOOT ENABLE: System can be booted from diskette drive no matter what configuration reads when this S4 is enabled (on)	OFF*	DISABLED
		ON	ENABLED
S5	POWER-ON PASSWORD DEFEAT: Password is set during configuration.	OFF*	DISABLED
		ON	ENABLED
S6	NV RAM: Invalidates nonvolatile RAM and configuration is cleared when S6 is on.	OFF*	DISABLED
		ON	ENABLED

* Default.

System Board (003513, 003537, 003535, 003742, 003694)

SW1 Settings, Processor Select	S1	S2	S3
486SX/33	OFF	OFF	OFF
486DX/33 or 486DX2/66	ON	OFF	ON
OverDrive Processor*	OFF	ON	ON

* When available.

Microprocessors	Spare Part
486DX/33 processor	194495-001
486SX/33 processor	197489-001 DISCONTINUED
486DX2/66 processor	197422-001 DISCONTINUED

Memory Modules	Speed	Spare Part
4 MB Memory Module	80 ns	118741-001
8 MB Memory Module	80 ns	128954-001
16 MB Memory Module	80 ns	139143-001
32 MB Memory Module	80 ns	139949-001
4 MB Memory Module	70 ns	141754-001
8 MB Memory Module	70 ns	141755-001
16 MB Memory Module	70 ns	149947-001
32 MB Memory Module	70 ns	149948-001

Continued

ProSignia VS

Cache Bracket	Spare Part
Cache Bracket	199135-001

Controller Boards	Assembly	Spare Part
SMART Controller	002969	142130-001
	003596	181132-001
Fast SCSI-2 Controller	002682	142040-001
Fast-Wide SCSI-2/E Controller	003529	199634-001
NetFlex Controller	002709	142041-001
NetFlex Controller Token Ring Module	142035	142042-001
NetFlex-2 ENET-TR Controller	003382	142222-001
NetFlex-2 DualPort ENET Controller	003101	142151-001
NetFlex-2 TR Controller	003647	199521-001
NetFlex-2 DualPort TR Controller	003104	142195-001
NetFlex-3/E Controller	004162	169801-001
NetFlex-3/P Controller	004165	169811-001
NetFlex-3 100 Base-TX Upgrade Module	004183	169805-001
NetFlex-3 100 VG-AnyLAN Upgrade Module	004189	169803-001

Miscellaneous	Assembly	Spare Part
Serial/Parallel Interface Board *	000990	106886-001
SpeedPac 144/I Data and Fax Modem **	003002	147453-001

* See Multiproduct Boards Appendix, for settings.

** See Modem Configuration Information Appendix, for settings.

Hard Drives	Spare Part
535 MB Fast-SCSI-2	137730-001
1.05 GB Fast-SCSI-2	142039-001
2.1 GB Fast-SCSI-2	142272-001
4.3 GB Fast-SCSI-2	199585-001

Tape Drives	Spare Part	Tape Cartridge	Spare Part
525 MB ACA	142073-001	525 MB QIC Cartridge	119504-001
1.2 GB Tape Drive	199615-001	1.2 GB QIC Cartridge	199625-001
2/8 GB DAT	142074-001	1.3 GB 60M DDS1	131167-001
		2.0 GB 90M DDS1	131148-001
		DAT Cleaning Cartridge	131194-001
4/16 GB TurboDAT	199464-001	4.0 GB 120M DDS2	199496-001
TurboDAT Autoloader	199466-001	4 Cartridge Magazine	199467-001
		12 Cartridge Magazine	199468-001
10/20 Table Top DLT	199676-001	10/20 GB Data Cartridge	199703-001
		DLT Cleaning Cartridge	199705-001
15/30 Table Top DLT	242469-001	15/30 GB Data Cartridge	242467-001
		DLT Cleaning Cartridge	199705-001

Diskette Drives	Spare Part
1.44 MB 3-mode w/bracket	197006-001
	DISCONTINUED
1.44 MB, 2-mode, 3.5", one-third height, w/bracket	112565-001
1.2 MB	112566-001

ProSignia VS

CD-ROM Drives	Spare Part
Tray Load CD-ROM (internal)	142223-001
Tray Load CD-ROM (external)	199430-001

Cables	Spare Part
LED	197832-001
Internal SCSI Hard Drive	194488-001
	DISCONTINUED
Diskette Cable (2-mode)	194489-001
	DISCONTINUED
Diskette Cable (3-mode)	148217-001
External SCSI Signal (6')	146776-001
External 100-pin to 50-pin	142159-001
Loopback Cable (2 ch NIC)	142254-001
Loopback Cable (NetFlex)	142054-001
2-channel Ethernet "Y"	197134-001
DLT, 6', Standard to Centronix	199714-001
DLT, 6', Wide to Centronix	199780-001
DLT, 18", Daisy Chain (Table Top)	199713-001
DLT Active Terminator	199715-001
50-pin to 68-pin Adapter	189638-001

SCSI ID Jumper Settings	Drive Bay	Pin 3 ID2	Pin 2 ID1	Pin 1 ID0
3	3	OFF	ON	ON
2	2	OFF	ON	OFF
1	1	OFF	OFF	ON
0	0	OFF	OFF	OFF

IMPORTANT: No two drives can have the same SCSI ID.


ROM Information	Spare Part
System ROMPaq	143198-001
Option ROMPaq	142207-001

Power Supply/Battery	Spare Part
Power Supply 200W	197416-001
	DISCONTINUED
Battery	160274-001

ProSignia VS

Memory Upgrade Chart

PROCESSOR BOARD
(8 MB)

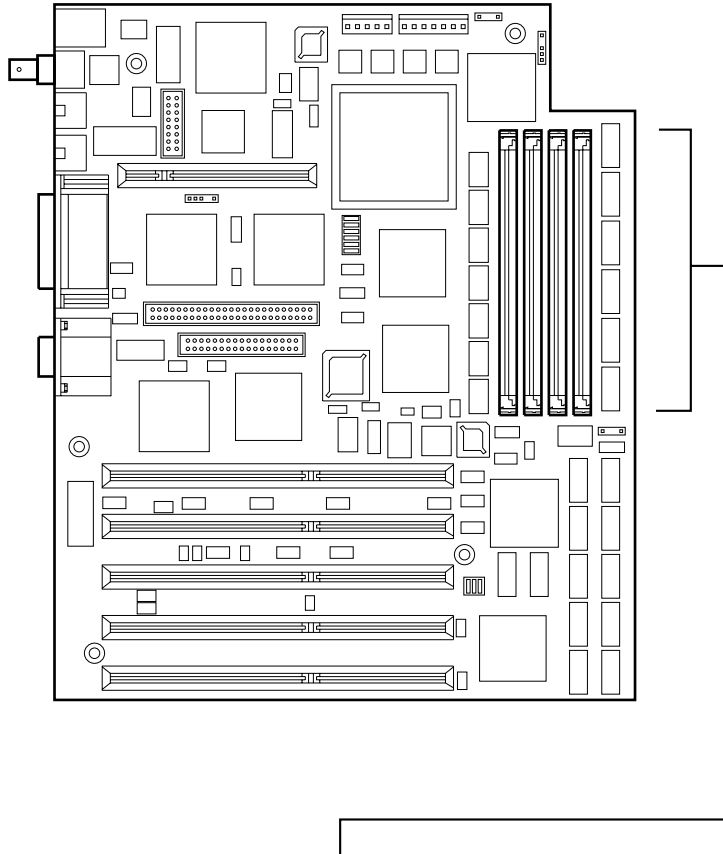

ADD ANY COMBINATION OF THE FOLLOWING MEMORY MODULES,
UP TO 128 MEGABYTES TOTAL SYSTEM MEMORY

4-MB 70ns - OPTION PN 141684-001
4-MB 80ns - OPTION PN 118690-001

8-MB 70ns - OPTION PN 141685-001
8-MB 80ns - OPTION PN 128877-001

16-MB 70ns - OPTION PN 190747-001
16-MB 80ns - OPTION PN 149320-001

32-MB 70ns - OPTION PN 190748-001
32-MB 80ns - OPTION PN 149147-001