

DESKPRO 386/33

System Boards	Assembly	Spare Part
386 System	001184-001*	115190-001
386 System	001184-002* **	115477-001

* Discontinued effective February 28, 1996

** Includes integrated diskette controller on system board socket U50.

SW1 Settings (System Board 001184)

1	2	Function
ON *		Enable Integrated VGA
OFF		Disable Integrated VGA
	ON *	Enable Power-On Password
	OFF	Disable Power-On Password

* Default.

Memory Boards/Modules	Assembly	Spare Part
2 MB 32-Bit System Memory	001286*	115187-001
2 MB Single Socket Memory Module	001250	115184-001

* Discontinued effective February 28, 1996

Controller Boards	Assembly	Spare Part
Tape Adapter Board **	000774	113259-001
15 MHz ESDI Controller Board **	001283/001628	121667-001
SCSI Option Adapter Board **	001379	116809-001
ESDI/Diskette Controller Board **	001472	115374-001
Diskette Controller Board	001475*	115373-001
SCSI Compression Adapter Board **	001846	122185-001
Advanced ESDI Controller Board **	WD1009	122370-001

* Discontinued effective February 28, 1996

** See Volume 2 Appendix, Multiproduct Boards, for settings.

Video Boards	Assembly	Spare Part
Advanced Graphics 1024 *	109958	114201-001
Advanced Graphics Memory Board	109959	114202-001
QVision 1024/I Controller *	002163	126655-001

* See Volume 2 Appendix, Multiproduct Boards, for settings.

Miscellaneous	Assembly	Spare Part
Serial/Parallel Interface *	000570	106886-001
	000990	
2400 Baud Internal Modem	001070	Not Available
9600/2400 Fax Modem **		197458-001

* See Volume 2 Appendix, Multiproduct Boards, for settings.

** See Volume 2 Appendix, Modem Configuration Information.

DESKPRO 386/33

Hard Drives

Size	Type	Inter-leave	Integrated	Min ROM	Spare Part	Controller Assembly
84 MB	27	1:1	Y	B.2	Not Available	N/A
100 MB	45	1:1	Y	B.2	142365-001 ⁴	N/A
110 MB	33	1:1	Y	B.2	Not Available	N/A
120 MB	50	1:1	Y	C.2	136918-001 ⁴ 116806-001 ⁵ 111910-001 ⁵	N/A
210 MB	51	1:1	Y	C.2	124013-001 ⁴ 161956-001 ^{5,9} 162096-001 ^{5,10}	N/A
300 MB ¹	38	1:1	N	B.2	Not Available ⁴ 111914-001 ^{5, 6} 111915-001 ^{5, 7}	001283 001472 001628
320 MB	28	1:1	N	B.2	Not Available ⁴ 111918-001 ⁵	001283 001628 WD1009
340 MB ³	28	1:1	Y	B.2	194525-001 ^{4, 8}	001283 001628 WD1009
650 MB ¹	49 ²	1:1	N	B.2	115181-001 ⁴ 111886-001 ⁵	001283 001472 001628 WD1009
Hard Drive Expansion Unit (300-/650-MB)						001472 001628 WD1009

¹ Used internally and in Hard Drive Exp. Unit. Requires MS-DOS Version 3.3 or later.

² Drive Type 49 with MS-DOS, drive type 42 with MS OS/2, and drive type 41 with operating systems from SCO.

³ Formats to 325 MB. ⁴ Except Europe. ⁵ Europe only.

⁶ Black bezel. ⁷ Gray bezel.

⁸ Contains IDE interface hard drive. If system has two ESDI hard drives, is used in an Expansion Unit, or with the Advanced ESDI Controller (WD1009), order 115182-001 hard drive kit.

⁹ IDA, IDA2. ¹⁰ IDE.

DESKPRO 386/33

Tape Drives	Spare Part	Tape Cartridge	Spare Part
40/60 MB *	112524-001	40 MB (DC2000)	108142-001
(1/2 height)		60 MB (DC2060)	122086-001
60 MB *	131338-001	60 MB (DC2060)	122086-001
(1/3 height)			
80/120 MB *	122087-001	80 MB (DC2080)	116966-001
(1/2 Height)		120 MB (DC2120)	116967-001
80/120 MB *	131337-001	80 MB (DC2080)	116966-001
(1/3 height)		120 MB (DC2120)	116967-001
135 MB	113218-001 ¹ 113227-001 ²	135 MB (DC600 XTD)	113234-001
120/250 MB *	197490-001	120 MB (DC2120)	116967-001
(1/2 Height)			
150/250 MB	115220-001	150 MB (DC600 XTD)	113234-001
		250 MB (DC6250)	115298-001
320/525 MB	116804-001	320 MB (DC6320)	119505-001
		525 MB (DC6525)	119504-001
1.3-/2.0-GB DAT	131149-001	1.3 GB	131167-001
		2.0 GB	131148-001
		DAT Cleaning Cartridge	131194-001

¹ Black bezel.

² Gray bezel.

* With compression.

Diskette Drive	Spare Part
360 KB	112567-001
1.2 MB	112566-001
1.44 MB *	112565-001

* Requires MS-DOS Version 3.31 Revision A if installed as drive B, and MS-DOS Version 3.31 Revision B if installed as drive A.

Cables	Used With	Spare Part	Description
ESDI/Diskette/Tape Signal	All ESDI/Diskette 80/120 and 40/60-MB Tape Drives	115376-001*	28-inch
ESDI/Diskette Signal	ESDI/Diskette	115375-001*	33-inch
Tape Signal	135 and 150/250 MB Tape Drives	115196-001	20-inch
Tape Signal	320/525 MB and 1.3/2.0 GB Tape Drives	116933-001	
Mass Storage Power	Single Hard Drive	115215-001	
Mass Storage Power	Diskette, Tape Drive	120591-001	Single
		120592-001	Dual
Mass Storage Power	Dual Hard Drive	112669-005	
Hard Drive Signal	Dual Hard Drive	115195-002	
Hard Drive Signal	300-, 320-, and 650 MB Hard Drives (Single)	100625-006	20 Pin
		115197-001	34 Pin
Hard Drive Signal	300-, 320-, and 650 MB Hard Drives (Dual)	100625-006	20 Pin
		115811-001	34 Pin
Hard Drive Signal	84-, 110-, 120 and 210 MB Hard Drives	115195-001	
External I/O	Expansion Unit	115810-001	
VGA Pass-Through	Advanced Graphics	114229-001	

* Discontinued effective February 28, 1996

DESKPRO 386/33

Processor/Coprocessor Locations

Part	Location
Processor (386-33)	U7
Coprocessor (387-33)	U39
Weitek 3167-33 Coprocessor	U8

System ROM Information

U5 ODD	U16 EVEN
--------	----------

System ROM Revisions (Spare Part 115290-001)

Revision	Number on ODD ROM	Number on EVEN ROM
B.2	115305-003	115306-003
C.0	115305-004	115306-004
C.2	115305-005*	115306-005*

* Discontinued effective February 28, 1996

Power Supply/Battery

Spare Part

Power Supply	115189-001
Battery/Clock Module	107872-001

DESKPRO 386/33

Memory Upgrade Chart

NOTE

ADD 2-MB MEMORY UPGRADE
KITS (115144-001) AS SHOWN
TO OBTAIN DESIRED MEMORY
CONFIGURATION



SYSTEM MEMORY BOARD
TOTAL MEMORY: 2 MB




TOTAL MEMORY: 4 MB




TOTAL MEMORY: 6 MB




TOTAL MEMORY: 8 MB

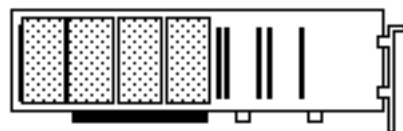


TOTAL MEMORY: 10 MB

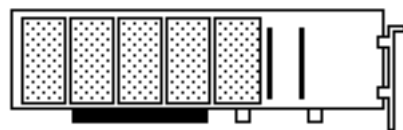

TOTAL MEMORY: 12 MB

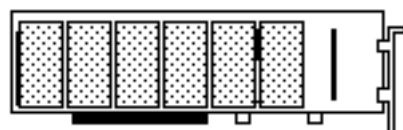

TOTAL MEMORY: 14 MB

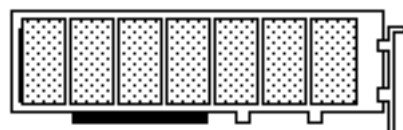

TOTAL MEMORY: 16 MB