

DESKPRO 386N

System Boards	Assembly	Spare Part
386SX System Board	001496	113922-001
386SX System Board *	001933	118796-001

* Includes Advanced VGA capability. Used only in systems with a "256 VGA" label applied to the rear of the unit.

System Board SW1 Switch Settings (001496 and 001933)

Switch	Setting	Function
SW1-1	ON*	Enable Integrated VGA
SW1-1	OFF	Disable Integrated VGA
SW1-2	ON*	Enable SETUP
SW1-2	OFF	Disable SETUP
SW1-3	ON*	Enable external boot
SW1-3	OFF	Disable external boot
SW1-4	ON*	Enable power-on password
SW1-4	OFF	Disable power-on password
SW1-5	ON*	Reserved
SW1-6	ON*	Enable diskette write
SW1-6	OFF	Disable diskette write

* Default.

Fan Jumper

Jumper Setting	Function
E1-1 to E1-2	Full
E1-2 to E1-3	Auto

Memory Boards	Assembly	Spare Part
Memory Expansion Board	001457	118739-001
4 MB Memory Module	137930	137965-001
1 MB Memory Module	118666	113911-001
2 MB Memory Module	118667	113923-001

Video Boards	Assembly	Spare Part
QVision 1024/I Controller Board *	002163	126655-001

* See Volume 2 Appendix, Multiproduct Boards, for settings.

Hard Drives

Size	Type	Inter-leave	Inte-grated	Min ROM	Spare Part
20 MB	2	1:1	Y	032790	Not Available
40 MB	22	1:1	Y	032790	Not Available
40 MB	17	1:1	Y	032790	Not Available
60 MB	55	1:1	Y	032790	Not Available
84 MB	27	1:1	Y	032790	Not Available
120 MB	50	1:1	Y	032790	113962-001 ¹
					111910-001 ²

¹ Except Europe.

² Europe only.

Diskette Drive	Spare Part
1.2 MB	112566-001
1.44 MB	113958-001
Diskette Drive Adapter Kit	118686-001

DESKPRO 386N

Miscellaneous	Assembly	Spare Part
Serial/Parallel Interface Board *	000570	106886-001
Serial/Parallel Interface Board *	000990	106886-001
2400-Baud Internal Modem	001070	Not Available
Backplane Board	001451	118742-001
9600/2400 Fax Modem **		197458-001

* See Volume 2 Appendix, Multiproduct Boards, for settings.

** See Volume 2 Appendix, Modem Configuration Information.

Cables	Used With	Spare Part
Diskette Signal Cable	1.2 MB Diskette	113938-001
Diskette Power Cable	1.2 MB Diskette and Hard Drive	113939-001
Diskette Signal/Power Cable	1.44 MB Diskette	113930-001
Mass Storage Power Cable	All Hard Drives	113927-001
Mass Storage Signal Cable	All Hard Drives	113928-001
Serial Diagnostic Cable	Remote Unit	118773-001

Processor/Coprocessor Locations

Processor (386SX-16)	Coprocessor (387SX-16)
System Board (001496 and 001933)	
Not field replaceable	U58

System ROM Location (System Boards 001496 and 001933)

U13


System ROM Revisions (Spare Part 118775-001)

Revision	Number on ROM
032790	113915-003
040590	113915-004
042590	113915-005
050390	113915-006
080290	113915-007
040891	126713-004
072691	136522-001

Power Supply/Battery	Spare Part
Power Supply	118743-001
Battery/Clock Module	107872-001

DESKPRO 386N

MEMORY UPGRADE CHART

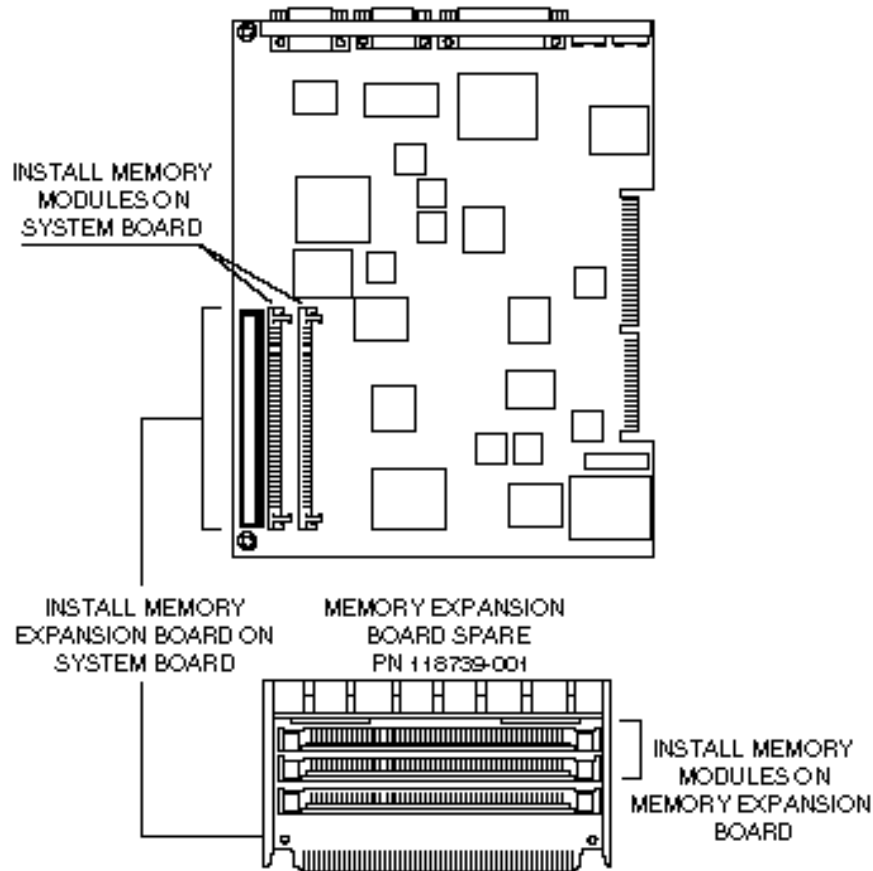

INSTALL MEMORY MODULES IN ANY COMBINATION AND IN ANY ORDER IN THE **TOP TWO SLOTS** ON THE MEMORY EXPANSION BOARD

MAXIMUM MEMORY:
16 MEGABYTES

1-MB MEMORY MODULE
SPARE PN 113911-001



2-MB MEMORY MODULE
OPTION PN 118689-001



4-MB MEMORY MODULE
OPTION PN 137935-001

