

ProLiant 1600

System/Processor Boards	Assembly	Spare Part
System I/O Board, (PCI/ISA), w/ Cage	007735-001	313621-001
Processor Board, Dual SCSI, w/ Cage and Fan	007918-101	313622-001

Core/Bus Frequency Ratio				
Core/Bus Ratio	S1	S2	S3	S4
300	ON	ON	OFF	ON
350	ON	ON	OFF	OFF
400	ON	OFF	ON	ON
450	ON	OFF	ON	OFF
500	ON	OFF	OFF	ON

SW2 Switch Settings (007918)			
SW	Function	Set to ON	Set to OFF
1	Disable On-Board Video	On-Board video is disabled.	Default
2	Lock Configuration Information	You cannot change configuration information.	Default Disabled
3	Tower-to-Rack Indication	Rack model.	Default (Tower model)
4	Disable Diskette Boot	System booting from the diskette drive is disabled.	Default
5	Disable Password	Clears passwords.	Default
6	Invalidates NVRAM	Invalidates NVRAM.	Default

SW2 Settings (007918)	
Function	Switches
Reserved	

Model	Processor	Config. Code
PL 1600/350 Tower	350 MHz/100	BWR1
PL 1600/400 Tower	400 MHz/100	BWT1
PL 1600/400 Rack	400 MHz/100	BWV1
PL 1600/450 Tower	450 MHz/100	CFS1
PL 1600/450 Rack	450 MHz/100	CFX1

Microprocessors	Assembly	Spare Part
Processor, w/ Heat Sink 350/100		313623-001
Processor, w/ Heat Sink 400/100		313624-001
Processor, w/ Heat Sink 450/100	278309-003	179780-001

Memory Boards/Modules	Assembly	Spare Part
32MB DIMM (SDRAM, Reg 100 MHz)	306430-001	317747-001
64 MB DIMM (SDRAM, Reg 100 MHz)	333143-001	317745-001
128 MB DIMM (SDRAM, Reg 100 MHz)	306431-001	317756-001
256 MB DIMM (SDRAM, Reg 100 MHz)	306432-001	317749-001

ProLiant 1600

Miscellaneous Internal	Assembly	Spare Part
Voltage Regulator Board	327563-001	327660-001
Backplane Board, PCI, Dual SCSI		149046-001
Drive Cage, LVD, 6 Drive Compatibility	382163-001	387089-001

Miscellaneous External

See "ProLiant Storage System" section for information on:

- * External hot-pluggable hard drives
- * Stand-By Recovery Server Option and cables
- * On-Line Recovery Server Option and cables

See "SCSI Storage Expander" section for information on:

- * External non-pluggable hard drives
- * External tape drives

Hard Drives	Spare Part
9.1 GB Non Hot-Pluggable Wide Ultra 1.6" ¹	199886-001
9.1 GB Hot-Pluggable Wide SCSI 1.6" ¹	199888-001
9.1 GB Non Hot-Pluggable Fast-SCSI-2	199885-001
4.3 GB Hot-Pluggable Wide Ultra 1" ¹	242622-001
4.3 GB Non Hot-Pluggable Wide Ultra 1" ¹	242606-001
4.3 GB Hot-Pluggable FW SCSI-2	199598-001
4.3 GB Non Hot-Pluggable FW SCSI-2	199599-001
4.3 GB Hot-Pluggable Fast-SCSI-2	199584-001
4.3 GB Non Hot-Pluggable Fast-SCSI-2	199585-001
2.1 GB Hot-Pluggable Wide Ultra 1" ¹	242603-001
2.1 GB Non Hot-Pluggable Wide Ultra 1" ¹	242604-001
2.1 GB Hot-Pluggable FW SCSI-2 1"	199878-001
2.1 GB Hot-Pluggable FW SCSI-2	199643-001
2.1 GB Non Hot-Pluggable FW SCSI-2	199644-001
2.1 GB Hot-Pluggable Fast-SCSI-2	199428-001
2.1 GB Non Hot-Pluggable Fast-SCSI-2	142272-001
1.05 GB Hot-Pluggable Fast SCSI-2	146717-001
1.05 GB Non Hot-Pluggable Fast SCSI-2	146799-001
1" Drive Tray, Fast-Wide Connector*	199880-001
1" Drive Tray, Fast-SCSI-2*	242593-001
1.6" Drive Tray, Fast-Wide Connector	199656-001

¹ Requires Optional Wide-Ultra Controller and/or Cabling to use Wide Ultra Speeds.

*1" Drive Tray Kits contain 1" and 1.6" covers without side-springs.

CD-ROM Drives	Assembly	Spare Part
24X, IDE	278025-201	278026-001

Diskette Drives	Spare Part
1.44 MB	172465-001

Cables	Spare Part
Diskette Cable	271928-001
Point to Point SCSI Cable	149097-001
IDE/CD Cable	271936-002
SCSI DAT/DLT Cable	300926-001
Parallel Cable	271938-001
SCSI Adapter Kit, 50-to-68, Female	189638-001


ProLiant 1600

Power Supply	Spare Part
Power Supply, 325 W	271916-001
4.5 V Battery Replacement	160274-001


ProLiant 1600

Memory Upgrade Chart

PROCESSOR BOARD
007918-001

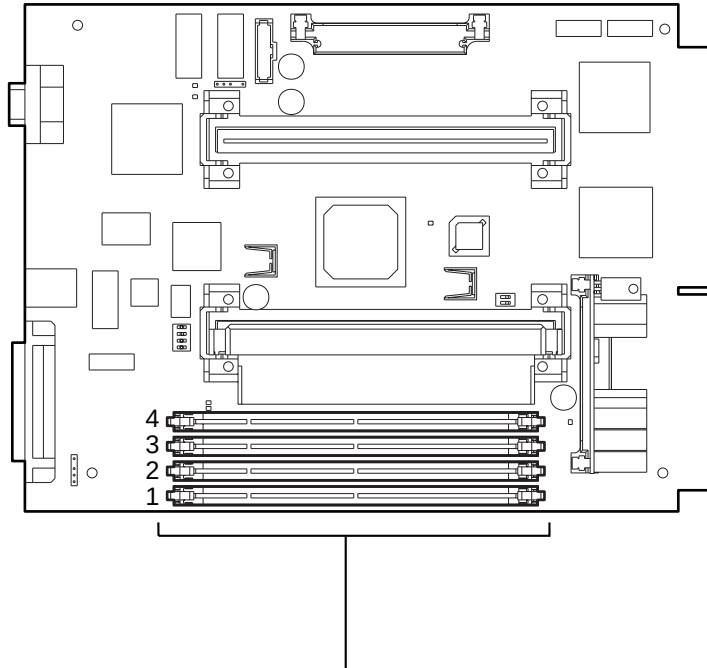

A MAXIMUM OF 1 GB TOTAL MEMORY.



32-MB 100MHz SDRAM DIMMs - OPTION PN 313613-B21

64-MB 100MHz SDRAM DIMMs - OPTION PN 313614-B21

128-MB 100MHz SDRAM DIMMs - OPTION PN 313615-B21

256-MB 100MHz SDRAM DIMMs - OPTION PN 313616-B21