

ProLinea 466

System Boards	Assembly	Spare Part	System
System Board, PCI, 8 MB, w/o Processor	003910-101	172170-001	3x3 ¹ , 4x4 ²
System Board, PCI, 8 MB, w/o Processor	003910-101	172620-001	5x5 ³
System Board, PCI, w/o Processor ⁴	003825-101	172174-001	3x3 ⁴
System Board, PCI, 8 MB, w/o Processor	003822-101	173148-001 173149-001	3x3, 4x4, 5x5

¹ 3x3 = 3 bay, 3 slot form factor.

² 4x4 = 4 bay, 4 slot form factor.

³ 5x5 = 5 bay, 5 slot form factor.

⁴ Board accepts either AMD or Intel processor.

Configuration Jumpers, 486-Based System Boards (003822, 003825, 003910)

Jumper	Function	Setting	Description
E5	Internal/External Battery	1 - 2 2 - 3	Internal (on-board) Battery External Battery. Connect at header P3.
E6	Password Enable/Disable	1 - 2 2 - 3	Password Enabled Password Disabled

SW1, Speed Settings, 486-Based System Boards (003822, 003825, 003910)

CPU Type/Operation	S1	S2	S3	S4
486DX2/50	ON	ON	OFF	OFF
486DX2/66	ON	OFF	OFF	OFF
486DX4/100	ON	OFF	OFF	OFF

Configuration Code *	PCA Part Number	System Board Spare Part	Form Factor
HKZ1**	003910-101	172170-001	3x3
HKZ1**	003822-101	173148-001	3x3
HKZ2**	003910-101	172170-001	3x3
HKZ2**	003822-101	173148-001	3x3
HKZ3**	003910-101	172170-001	3x3
HKZ3**	003822-101	173148-001	3x3
HKZ4	003822-101	173148-001	3x3
GKZ2**	003910-101	172170-001	3x3
GKZ2**	003822-101	173148-001	3x3
GKZ3**	003910-101	172170-001	3x3
GKZ3**	003822-101	173148-001	3x3
GKZ4**	003822-101	173148-001	3x3
HLB1**	003910-101	172170-001	4x4
HLB1**	003822-101	173148-001	4x4
HLB2**	003910-101	172170-001	4x4
HLB2**	003822-101	173148-001	4x4
HLB3**	003910-101	172170-001	4x4
HLB3**	003822-101	173148-001	4x4
HLB4**	003910-101	172170-001	4x4
HLB4**	003822-101	173148-001	4x4
HLB5	003822-101	173148-001	4x4
HLB6	003822-101	173148-001	4x4

Continued

ProLinea 466

Configuration Code *	PCA Part Number	System Board Spare Part	Form Factor
GLB2**	003910-101	172170-001	4x4
GLB2**	003822-101	173148-001	4x4
GLB3**	003910-101	172170-001	4x4
GLB3**	003822-101	173148-001	4x4
GLB4**	003910-101	172170-001	4x4
GLB4**	003822-101	173148-001	4x4
GLB5	003822-101	173148-001	4x4
GLB6	003822-101	173148-001	4x4
HLH1**	003910-101	172620-001	5x5
HLH1**	003822-101	173149-001	5x5
HLH2**	003910-101	172620-001	5x5
HLH2**	003822-101	173149-001	5x5
HLH3**	003910-101	172620-001	5x5
HLH3**	003822-101	173149-001	5x5
HLH5**	003910-101	172620-001	5x5
HLH5**	003822-101	173149-001	5x5
HLH6	003822-101	173149-001	5x5
GLH2**	003910-101	172620-001	5x5
GLH2**	003822-101	173149-001	5x5
GLH3**	003910-101	172620-001	5x5
GLH3**	003822-101	173149-001	5x5
GLH5**	003910-101	172620-001	5x5
GLH5**	003822-101	173149-001	5x5
GLH6	003822-101	173149-001	5x5
HTM1	003825-101	172174-001	3x3
HTM2	003825-101	172174-001	3x3

* "G" codes are European models. "H" codes are worldwide.

** Must use assembly number AND configuration code to order spare.

Microprocessors	Spare Part	System
486DX2/50	172937-001	3x3, 4x4
486DX2/66	194395-001	3x3, 4x4, 5x5
P24C-100/33	172673-001	3x3, 4x4, 5x5

Memory	Assembly	Spare Part	System
4 MB SIMM, 70ns	172707-002	172718-001	3x3, 4x4, 5x5
8 MB SIMM, 70ns	172707-003	172719-001	3x3, 4x4, 5x5
16 MB SIMM, 70ns	172707-004	172938-001	3x3, 4x4, 5x5
32 MB SIMM, 70ns	172707-005	172939-001	3x3, 4x4, 5x5
128K Cache Memory	003868-001	172085-001	3x3, 4x4, 5x5
256K Cache Memory	004416-001	172894-001	3x3, 4x4, 5x5
1 MB Video Memory, DRAM ¹	004120-001	171044-001	3x3, 4x4, 5x5
1 MB Video Memory, VRAM ²	003971-001	172467-001	3x3, 4x4, 5x5

¹ Cirrus Logic GD5434.

² QVision 1280P+.

ProLinea 466

Miscellaneous	Assembly	Spare Part	System
Backplane	003730-001	172622-001	3x3
Backplane	003733-001	172623-001	4x4
Backplane	003736-001	172624-001	5x5
Speaker w/o Bracket	141045-001	141336-001	3x3, 4x4
Speaker w/ Bracket	141045-001	172831-001	5x5
WSS Feature Card	004198-001	172078-001	4x4, 5x5

Controller Boards	Assembly	Spare Part	System	Page
IDE Controller	002172-001	171745-001	3x3, 4x4, 5x5	X
6260 SCSI-2 Controller	004004-001	133880-001	3x3, 4x4, 5x5	A-6
Ethernet ISA Controller w/ Slot Bracket	003086-001	147220-001	3x3, 4x4, 5x5	X
SCSI ISA, Plug and Play	184750-001	184751-001	3x3, 4x4, 5x5	X

CD-ROM Drive	Spare Part	System
CD-ROM, Internal, Quad Speed, IDE	172717-001	4x4, 5x5
CD-ROM, 16X, IDE, Slot Load, 5.25", Half Height	278791-001	All

Hard Drives	Type	Spare Part	System
270 MB, IDE	65/66	172778-001	3x3, 4x4, 5x5
420 MB, IDE	65	172780-001	3x3, 4x4, 5x5
535 MB SCSI	N/A	148286-001	3x3, 4x4, 5x5
540 MB	65	188666-001	3x3, 4x4, 5x5
1.08 GB, IDE, DFP	65	172941-001	3x3, 4x4, 5x5
1.05 GB SCSI	N/A	192799-001	3x3, 4x4, 5x5
2.1 GB Fast SCSI-2	N/A	142272-001	3x3, 4x4, 5x5

Tape Drives	Spare Part	System	Tape Cart.	Spare Part
340/680 MB w/ Compression	187658-001	3x3, 4x4, 5x5	340 MB 680 MB	184299-001 184300-001
525 MB ACA	142073-201	3x3, 4x4, 5x5	525 MB	119504-001
4 GB TR4, IDE	294126-001		4 GB TR4	294140-001
5.0 GB DAT	142074-201	3x3, 4x4, 5x5	2.0 GB DAT 5.0 GB DDS2	131148-001 199496-001

Diskette Drives	Spare Part	System
1.44 MB, 3-Mode	160788-201	3x3, 4x4, 5x5

SpeedPaq 144/I Internal FAX/Modem				
Country	Assembly	Spare Part	System	Page
U.S.	003002-001	147453-001	3x3, 4x4, 5x5	E-5

ProLinea 466

28.8k-bps Modem

Country	Assembly	Spare Part	RJ-11 Phone Cable	Option
U.S.	223610-002	259214-002	127949-001	259213-001

Cables	Spare Part	System
Kit: IDE CD-ROM/HD Cable (2); Audio Cables (2)	172478-001	3x3, 4x4
CD-ROM/HD Cable	172481-001	5x5
Diskette Drive Cable (3x3)	172477-001	3x3
Diskette Drive Cable (4x4)	172797-001	4x4
Diskette Drive Cable (5x5)	172480-001	5x5
2-Device SCSI, 3-Connector	146997-001	3x3, 4x4, 5x5
Hard Drive Select Cable	172945-001	Option
LED Assembly	172531-001	3x3, 4x4
LED Assembly	141346-001	5x5
2-Device SCSI, 3-Connector, Plug and Play	184118-001	3x3, 4x4, 5x5


ROM Information	Spare Part	System
System ROMPaq	148218-001	3x3, 4x4, 5x5

Power Supply/Battery	Spare Part	System
Power Supply, 145 W, U.S.	172765-001	3x3, 4x4
Power Supply, 145 W, PFC, Outside U.S.	172766-001	3x3, 4x4
Power Supply, 185 W	172838-001	5x5
Power Supply, 185 W, PFC	172839-001	5x5
Real-Time Clock Battery (4.5 V alkaline)	160274-001	3x3, 4x4, 5x5


ProLinea 466

Memory Upgrade Chart

PROCESSOR BOARD
003822, 003825, 003910, 003922
(4, 8, or 16 MB)

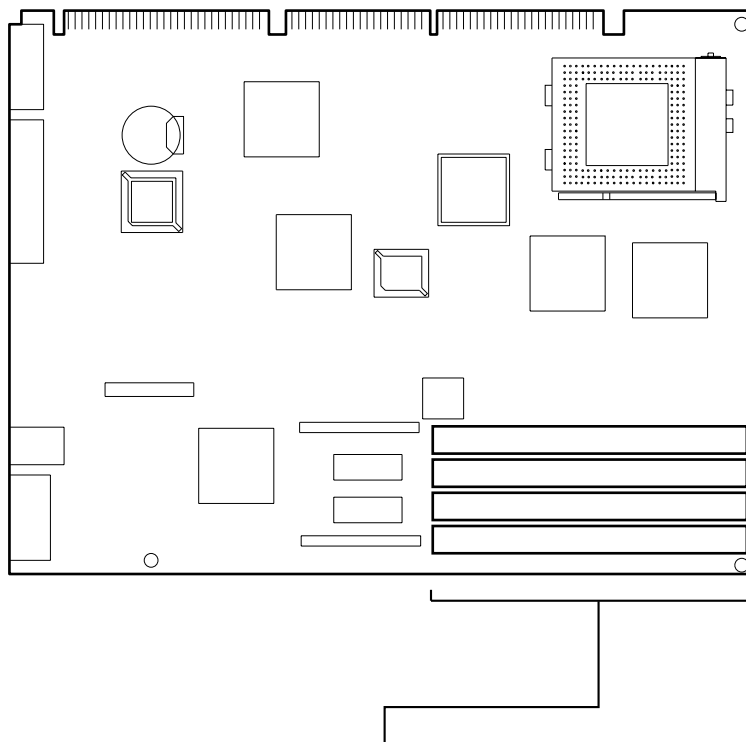

ADD ANY COMBINATION OF THE FOLLOWING MEMORY MODULES,
UP TO 136 MEGABYTES TOTAL SYSTEM MEMORY



4-MB 70ns - OPTION PN 172712-001

8-MB 70ns - OPTION PN 172713-001

16-MB 70ns - OPTION PN 172714-001

32-MB 70ns - OPTION PN 172715-001