

Deskpro 4000S

Processor Boards	Assembly	Spare Part	System
Board w/o Processor	007602-101	306425-001	All
Board w/o Processor, Brazil	007602-201	306425-201	All

Note: To avoid injury from electric shock and/or hot surfaces and to prevent damage to the system board and/or interface boards (such as NICs, video controllers, and memory), unplug the AC power cord from the wall outlet and allow the internal components of the PC to cool before servicing the unit.

Configuration Jumper, System Board (006582-101, 007602-101, 008074-101)

Jumper	Function	Setting	Description
P14	Clear CMOS; Reset Passwords	1 – 2	Remove jumper for 60 seconds

SW1, Speed Settings, System Board (006582-101, 007602-101, 008074-101)

BUS Proc. Speed	S1	S2	S3	S4	S5	S6
166 MHz	*	ON	ON	OFF	ON	**
200 MHz	*	OFF	ON	OFF	ON	**
233 MHz	*	OFF	OFF	OFF	ON	**

* S1 = Power-On Password Feature. ON = Disable: OFF = Enable. Default is OFF/Enabled .

** S6 = A/C ON Feature. ON = Enable: OFF = Disable. Default is OFF.

CONFIGURATION CODE TABLE			
Configuration Code	Assembly	System Bd Spare Part	System
BPC2 – BPC5	007062-101	306425-001	5166MMX
BPD2 – BPD3	007062-101	306425-001	5200MMX
BSL2 – BSL3	007062-101	306425-001	5233MMX

Microprocessors	Spare Part	System
586, 166/66	288460-001	5166MMX
586, 200/66	288459-001	5200MMX
586, 233/66	286258-001	5233MMX
Heat Sink w/ Clip and Pad	288473-001	All

Memory	Spare Part	System
8 MB, SDRAM, Mem Module	288438-001	All
16 MB, DIMM	278066-001	All
16 MB, SDRAM, Mem Module, ECC	278097-001	All
32 MB, DIMM	278067-001	All
32 MB, SDRAM, Mem Module, ECC	288440-001	All
64 MB, SDRAM, Mem Module	278095-001	All
64 MB, SDRAM, Mem Module, ECC	278098-001	All
128 MB, SDRAM, Mem Module	278096-001	All
128 MB, SDRAM, Mem Module, ECC	278099-001	All

Note: To avoid injury from electric shock and/or hot surfaces and to prevent damage to the system board and/or interface boards (such as NICs, video controllers, and memory), unplug the AC power cord from the wall outlet and allow the internal components of the PC to cool before servicing the unit.

Deskpro 4000S

Miscellaneous	Assembly	Spare Part	System
Backplane w/ Bracket	006585-001	288398-001	All
CD Interface Board w/ Cable	007397-001	288427-001	All CD
Keyboard, Spacesaver	166516-001	166514-001	All
Mouse Two-Button	141649-004	141189-401	All
Multimedia Sound System, US (-022 Europe; -011 NZ; -371 AP; -031 UK; -A91 Middle East)		294122-001	All

Controller Boards	Assembly	Spare Part	System
Audio w/ Wavetable	007628-001	166575-001	All
AUI/BNC Adapter	142858-002	192768-001	All
Controller	296628-001	296478-001	All
Feature Card, SM, ESS1868	006047-001	247428-001	All
Lunar Telephony ISA Board		294710-001	All
Modem, 33.6/56U, Data/Fax		294912-001	All
Modem, ISDN, 128 Kb/s	007037-001	273529-001	All
SCSI, P-N-P	184750-001	184751-001	All
USCSI, PCI, Plug and Play	185202-001	247399-001	All

Note: To avoid injury from electric shock and/or hot surfaces and to prevent damage to the system board and/or interface boards (such as NICs, video controllers, and memory), unplug the AC power cord from the wall outlet and allow the internal components of the PC to cool before servicing the unit.

CD-ROM Drive	Spare Part	System
CD-ROM, 20X, IDE	288445-001	All CD

Hard Drives	Spare Part	System
2.1 GB, IDE	288449-001	All
2.1 GB, USCSI, 3.5"	247409-001	All
2.4 GB, IDE, UDMA33	296679-001	All
3.2 GB, IDE	278746-001	All

Diskette Drives	Spare Part	System
Diskette Drive	288456-001	All
Diskette Drive, 120 MB	263709-001	All

33.6 Kb/s Data/Fax Modem (All systems)

Country	Assembly	Spare Part	RJ-11 Phone Cable
U.S.	295106-001	259214-002	127949-001

Cables	Spare Part	System
2-Dev w/ Term, A	184118-001	All
CD, Audio, Int	171109-001	All
CD, Audio, SoundBlaster	294170-001	All
Diskette Drive Cable (no twist)	288444-001	All
HD, C5	200860-001	All
Hard Drive Cable	288442-001	All
IDE, 3-Pos, 18"	247568-001	All
Power Adapter LS120	186423-001	All
RJ 45 Connector	290663-001	All
SCSI, LED, SH	247485-001	All


Deskpro 4000S

ROM Information (All systems)	Spare Part
System ROMPaq	N/A

Battery/Power Supply	Spare Part	System
Battery, Alk, 4.5v, 600ma, RTC	160274-001	All
Power Supply, 76 W	288329-001	All

Deskpro 4000S

Memory Upgrade Chart

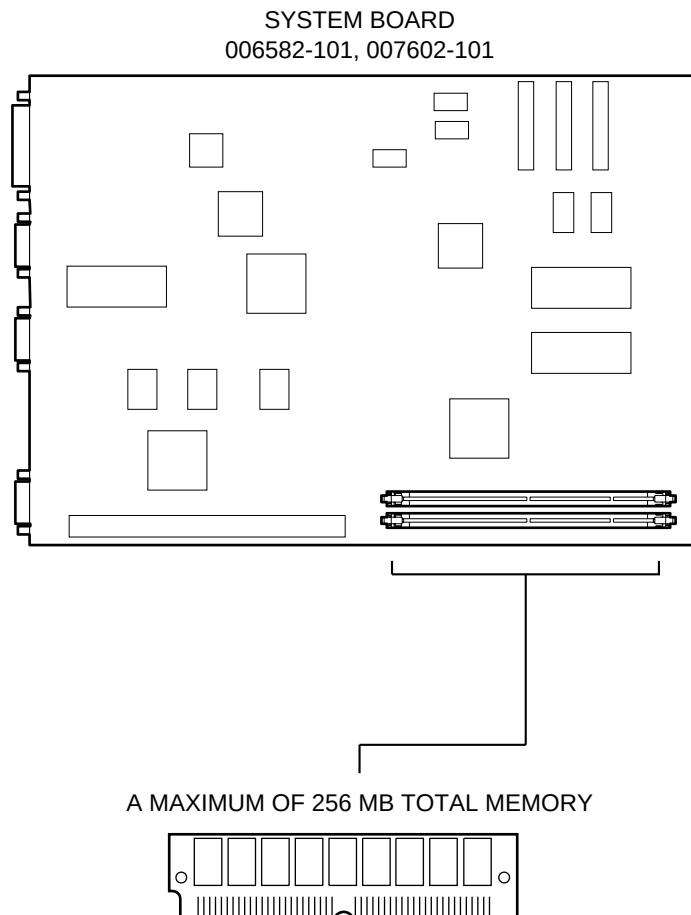

8-MB 66MHz DIMMS, SDRAM - OPTION PN 242802-B21

16-MB 66MHz DIMMS, SDRAM- OPTION PN 242803-B21

32-MB 66MHz DIMMS, SDRAM - OPTION PN 242804-B21

64-MB 66MHz DIMMS, SDRAM - OPTION PN 242805-B21

128-MB 66MHz DIMMS, SDRAM - OPTION PN 270812-B21