

Presario 4600

Processor/System Boards (w/o Processor)	Spare Part	System
Heat Sink/ Clip, PII	317216-001	All
Processor Board, w/o Processor	311009-001	All

Configuration Jumper Settings

Frequency (MHz)	JP1	JP2	JP3
233	OFF	ON	ON
266	ON	OFF	OFF
300	ON	OFF	ON
333	ON	ON	OFF

Pentium II Jumper Table

Function	Jumper	Position	Setting
CMOS	J7	Normal	1-2*
CLEAR CMOS: To clear CMOS, move the jumper from pins 1-2 to pins 2-3 for 10 seconds, then return to pins 1-2.			2-3

* Default

Microprocessors	Spare Part	System
PII/266 w/ 512 Cache	328412-001	4620, 26, 40
PII/300 w/ 512 Cache	328413-001	4665, 60
Heat Sink/Clip Kit, PII Processor	317216-001	4600

Memory	Assembly	Spare Part	System
1 MB Video Memory, EDO	210257-003	271462-001	All
2 MB Video Memory, EDO		170719-001	All
16 MB Synch DRAM, DIMM, 60ns	278030-002	278066-001	4640
32 MB DIMM	286548-001	304287-001	All

Miscellaneous	Assembly	Spare Part	System
Fan		298474-001	All
Hardware Kit		304239-001	All
Keyboard, U.S./Can. English	286220-003	304286-003	All
Mouse, Ivory	149998-006	199181-101	All
Speaker	304257-001	304241-001	All

Hard Drives	Spare Part	System
4.0 GB, IDE	286248-001	4620, 26, 40
8.0 GB, IDE	298464-001	4660
12.0 GB, IDE	298465-001	4665

CD-ROM Drive	Spare Part	System
CD-ROM, IDE, 24-spd	317211-001	4620, 26

DVD-ROM Drive	Spare Part	System
DVD-ROM	170718-001	4640, 60, 65

Diskette Drives	Spare Part	System
1.44 MB, 3.5"	239612-401	All

Presario 4600

56 Kb/s Modem

Country	Assembly	Spare Part	Cable Spare Part
APD	292256-003	317297-373	165224-001
Australia	007201-003	317296-001	304398-011
Belgium	007201-003	317296-001	304398-181
Brazil	292256-003	317297-001	165224-001
Canada	292256-003	317297-001	165224-001
Caribbean	292256-003	317297-001	165224-001
Denmark	007201-003	317296-001	304398-081
Finland	007201-003	317296-001	304398-351
France	007201-003	317296-001	304398-051
Germany	007201-003	317296-001	290663-001
Italy	007201-003	317296-001	165224-062
Japan	292256-003	317297-002	165224-001
Korea	007201-003	317296-001	165224-001
Latin America	292256-003	317297-001	165224-001
Mexico	292256-003	317297-001	165224-001
Netherlands	007201-003	317296-001	304398-331
New Zealand	007201-003	317296-001	165224-033
Norway	007201-003	317296-001	304398-091
Puerto Rico	292256-003	317297-001	165224-001
Singapore	007201-003	317296-001	304398-AF1
Spain	292256-003	317297-001	304398-071
Sweden	007201-003	317296-001	304398-101
Switzerland	007201-003	317296-001	304398-111
Taiwan	292256-003	317297-002	165224-001
Thailand	292256-003	317297-001	165224-001
U Kingdom	007201-003	317296-001	165224-033
US	292256-003	292269-003	165224-001

Cables	Spare Part	System
Cable Kit: HD, Diskette, CD-ROM Data, CD-ROM Audio, Serial Cable	170720-001	All


ROM Information	Spare Part	System
System ROMPaq	148218-001	All

Battery/Power Supply	Spare Part	System
Battery	234556-001	All
Power Supply, 110W	317218-001	All


Presario 4600

Memory Upgrade Chart

I/O BOARD
SPARE PART 311009-001

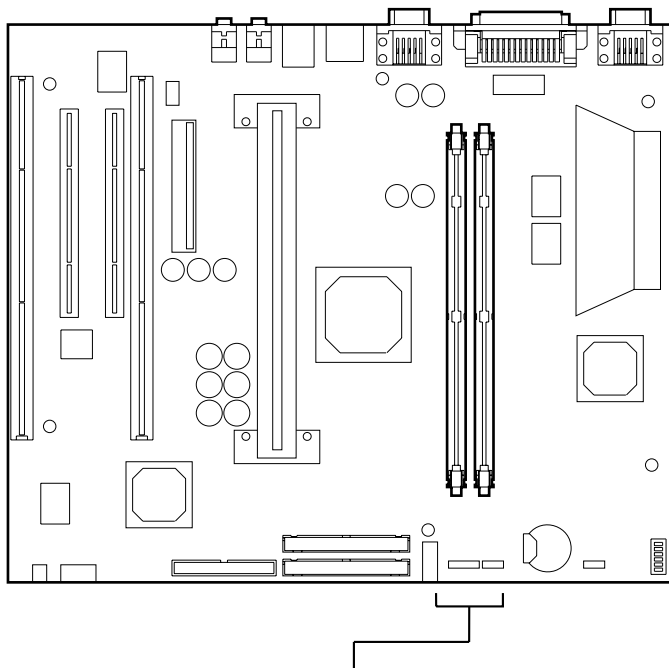

A MAXIMUM OF 256 MB TOTAL MEMORY
SYSTEM IS UPGRADABLE TO 256MB USING 16, 32, 64, and 128MB DIMMS.



16-MB SDRAM, - OPTION PN 271433-001

32-MB SDRAM, - OPTION PN 271343-001