

ProLiant 1600

System/Processor Boards	Assembly	Spare Part
Processor Board, Dual SCSI, w/ Cage and Fan	007918-101	313622-001
System I/O Board (DS1)	007735-005	146057-001
System I/O Board, (PCI/ISA), w/ Cage	007735-001	313621-001
System I/O Board, PCA (DS1)	007735-006	155349-001

Core/Bus Frequency Ratio				
Core/Bus Ratio	S1	S2	S3	S4
300	ON	ON	OFF	ON
350	ON	ON	OFF	OFF
400	ON	OFF	ON	ON
450	ON	OFF	ON	OFF
500	ON	OFF	OFF	ON
550	ON	OFF	OFF	OFF
600	OFF	ON	ON	ON

SW1 Switch Settings (007735)			
SW1	Function	Set to ON	Set to OFF
1	Disable On-Board Video	On-Board video is disabled.	Default
2	Lock Configuration Information	You cannot change configuration information.	Default Disabled
3	Tower-to-Rack Indication	Rack model.	Default (Tower model)
4	Disable Diskette Boot	System booting from the diskette drive is disabled.	Default
5	Disable Password	Clears passwords.	Default
6	Invalidates NVRAM	Invalidates NVRAM.	Default

SW2 Settings (007918)	
Function	Switches
Reserved	

Model	Processor	Config. Code
PL 1600/350 Tower	350 MHz/100	BWR1
PL 1600/400 Tower	400 MHz/100	BWT1
PL 1600/400 Rack	400 MHz/100	BWV1
PL 1600/450 Tower	450 MHz/100	CFS1
PL 1600/450 Rack	450 MHz/100	CFX1
PL 1600/500 Tower	500 MHz/100	CNJ1
PL 1600/500 Rack	500 MHz/100	CNK1
PL 1600/550 512K Tower	550 MHz/100	CSD1
PL 1600/550 512K Rack	550 MHz/100	CSF1
PL 1600/600 512K Tower	600 MHz/100	DDJ1
PL 1600/600 512K Rack	600 MHz/100	DDH1

Microprocessors	Assembly	Spare Part
Processor, w/ Heat Sink 350/100		313623-001
Processor, w/ Heat Sink 400/100		313624-001
Processor, w/ Heat Sink 450/100	278309-003	179780-001
Processor, w/ Heat Sink 500/100		114525-001
Processor, w/ Heat Sink 550/100		144573-001
Processor, w/ Heat Sink 600/100		155592-001

ProLiant 1600

Memory Boards/Modules	Assembly	Spare Part
32 MB DIMM (SDRAM, Reg 100 MHz)	306430-001	317747-001
64 MB DIMM (SDRAM, Reg 100 MHz)	333143-001	317745-001
128 MB DIMM (SDRAM, Reg 100 MHz)	306431-001	317756-001
256 MB DIMM (SDRAM, Reg 100 MHz)	306432-001	317749-001

Miscellaneous Internal	Assembly	Spare Part
Backplane Board, PCI, Dual SCSI		149046-001
Drive Cage, LVD, 6 Drive Compatibility	382163-001	387089-001
Fan, 130 CFM	387469-001	122633-001
Voltage Regulator Board	327563-001	327660-001

Miscellaneous External

See "ProLiant Storage System" section for information on:

- * External hot-pluggable hard drives
- * Stand-By Recovery Server Option and cables
- * On-Line Recovery Server Option and cables

See "SCSI Storage Expander" section for information on:

- * External non-pluggable hard drives
- * External tape drives

Hard Drives	Spare Part
1.05 GB Hot-Pluggable Fast-SCSI-2	146717-001
1.05 GB Non Hot-Pluggable Fast-SCSI-2	146799-001
1.6" Drive Tray, Fast-Wide Connector	199656-001
1" Drive Tray, Fast-SCSI-2*	242593-001
1" Drive Tray, Fast-Wide Connector*	199880-001
2.1 GB Hot-Pluggable Fast-SCSI-2	199428-001
2.1 GB Hot-Pluggable Fast-Wide SCSI-2	199643-001
2.1 GB Hot-Pluggable Fast-Wide SCSI-2 1"	199878-001
2.1 GB Hot-Pluggable Wide-Ultra 1" ¹	242603-001
2.1 GB Non Hot-Pluggable Fast-SCSI-2	142272-001
2.1 GB Non Hot-Pluggable Fast-Wide SCSI-2	199644-001
2.1 GB Non Hot-Pluggable Wide-Ultra 1" ¹	242604-001
4.3 GB Hot-Pluggable Fast-SCSI-2	199584-001
4.3 GB Hot-Pluggable Fast-Wide SCSI-2	199598-001
4.3 GB Hot-Pluggable Wide-Ultra 1" ¹	242622-001
4.3 GB Non Hot-Pluggable Fast-SCSI-2	199585-001
4.3 GB Non Hot-Pluggable Fast-Wide SCSI-2	199599-001
4.3 GB Non Hot-Pluggable Wide-Ultra 1" ¹	242606-001
9.1 GB Hot-Pluggable Wide SCSI 1.6" ¹	199888-001
9.1 GB Non Hot-Pluggable Fast-SCSI-2	199885-001
9.1 GB Non Hot-Pluggable Wide-Ultra 1.6" ¹	199886-001

¹ Requires Optional Wide-Ultra Controller and/or Cabling to use Wide-Ultra Speeds.

*1" Drive Tray Kits contain 1" and 1.6" covers without side-springs.

CD-ROM Drives	Assembly	Spare Part
24X, IDE	278025-201	278026-001
32X	341219-001	328707-001

Diskette Drives	Spare Part
1.44 MB	172465-001

ProLiant 1600


Cables	Spare Part
Diskette Cable	271928-001
IDE/CD Cable	271936-002
Parallel Cable	271938-001
Point to Point SCSI Cable	149097-001
SCSI Adapter Kit, 50-to-68, Female	189638-001
SCSI DAT/DLT Cable	300926-001

Battery/Power Supply	Spare Part
4.5 V Battery Replacement	160274-001
Power Supply, 325 W	271916-001
Redundant Power Supply	283623-001
Redundant Power Supply 48V DC	333593-001
Redundant Power Supply Cage	283624-001


ProLiant 1600

Memory Upgrade Chart

PROCESSOR BOARD
007918-001, 007735-00X

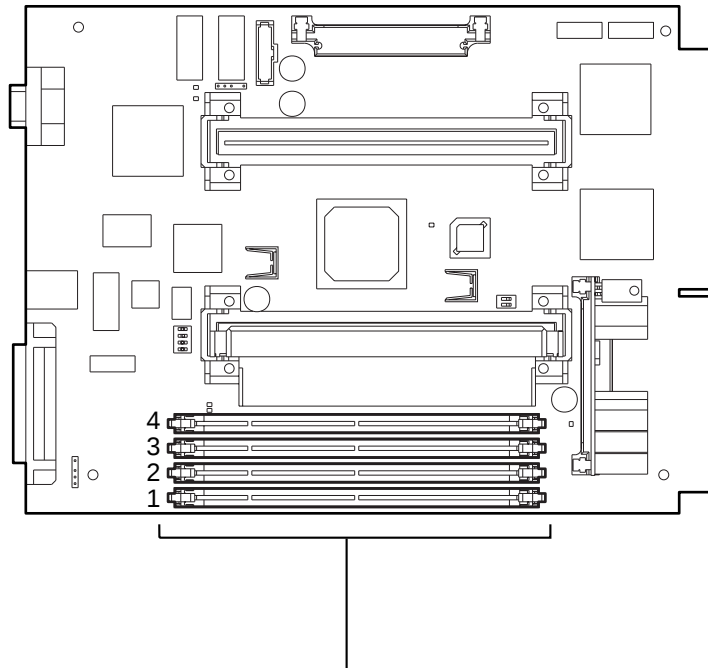

A MAXIMUM OF 1 GB TOTAL MEMORY.



32-MB 100MHz SDRAM DIMMs - OPTION PN 313613-B21

64-MB 100MHz SDRAM DIMMs - OPTION PN 313614-B21

128-MB 100MHz SDRAM DIMMs - OPTION PN 313615-B21

256-MB 100MHz SDRAM DIMMs - OPTION PN 313616-B21