

ProLinea 450

System Boards

(w/o Processor)	Assembly	Spare Part	System
System Board, PCI, 8 MB	003910-101	172170-001	3x3 ¹ , 4x4 ²
System Board, PCI, 4 MB	003922-101	172174-001	3x3
System Board, PCI, 8 MB	003822-101	173148-001	3x3
System Board, PCI, 4 MB	003825-101	173156-001	3x3

¹ 3x3 = 3 bay, 3 slot form factor.

² 4x4 = 4 bay, 4 slot form factor.

Configuration Jumpers, 486-Based System Boards (003822, 003825, 003910, 003922)

Jumper	Function	Setting	Description
E5	Internal/External Battery	1 – 2	Internal (on-board) Battery
		2 - 3	External Battery. Connect at header P3
E6	Password Enable/Disable	1 – 2	Password Enabled
		2 - 3	Password Disabled

SW1, Speed Settings, 486-Based System Boards (003822, 003825, 003910, 003922)

CPU Type/Operation	S1	S2	S3	S4
486DX2/50	ON	ON	OFF	OFF
486DX2/66	ON	OFF	OFF	OFF
486DX4/100	ON	OFF	OFF	OFF
Reserved	OFF	OFF	ON	OFF

Configuration Code *	PCA Part Number	System Board Spare Part	Form Factor
HKY1**	003910-101	172170-001	3x3
HKY1**	003822-101	173148-001	3x3
HKY2**	003910-101	172170-001	3x3
HKY2**	003822-101	173148-001	3x3
HKY3**	003922-101	172174-001	3x3
HKY3**	003825-101	173156-001	3x3
GKY2**	003910-101	172170-001	3x3
GKY2**	003822-101	173148-001	3x3
GKY3**	003922-101	172174-001	3x3
GKY3**	003825-101	173156-001	3x3
HLA1**	003910-101	172170-001	4x4
HLA1**	003822-101	173148-001	4x4
HLA2**	003910-101	172170-001	4x4
HLA2**	003822-101	173148-001	4x4
GLA2**	003910-101	172170-001	4x4
GLA2**	003822-101	173148-001	4x4

* "G" codes are European models. "H" codes are worldwide.

** Must use assembly number AND configuration code to order spare.

Microprocessors

	Spare Part	System
486DX2/50	172937-001	3x3, 4x4

ProLinea 450

Memory	Assembly	Spare Part	System
4 MB SIMM, 70ns	172707-002	172718-001	3x3, 4x4
8 MB SIMM, 70ns	172707-003	172719-001	3x3, 4x4
16 MB SIMM, 70ns	172707-004	172938-001	3x3, 4x4
32 MB SIMM, 70ns	172707-005	172939-001	3x3, 4x4
128K Cache Memory	003868-001	172085-001	3x3, 4x4
256K Cache Memory	004416-001	172894-001	3x3, 4x4
1 MB Video Memory, DRAM ¹	004120-001	171044-001	3x3, 4x4
1 MB Video Memory, VRAM ²	003971-001	172467-001	3x3, 4x4

¹ Cirrus Logic GD5434.

² QVision 1280P+.

Miscellaneous	Assembly	Spare Part	System
Backplane	003730-001	172622-001	3x3
Backplane	003733-001	172623-001	4x4
Speaker w/o Bracket	141045-001	141336-001	3x3, 4x4

Controller Boards	Assembly	Spare Part	System	Page
IDE Controller	002172-001	171745-001	3x3, 4x4	X
6260 SCSI-2 Controller	004004-001	133880-001	3x3, 4x4	A-6
Ethernet ISA Controller w/ Slot Bracket	003086-001	147220-001	3x3, 4x4	X
SCSI ISA, Plug and Play	184750-001	184751-001	3x3, 4x4	X

CD-ROM Drive	Spare Part	System
CD-ROM, Internal, Quad Speed, IDE	172717-001	4x4, 5x5
CD-ROM, 16X, IDE, Slot Load, 5.25", Half Height	278791-001	All

Hard Drives	Type	Spare Part	System
270 MB, IDE	65/66	172778-001	3x3, 4x4
420 MB	65	172780-001	3x3
535 MB SCSI	N/A	148286-001	3x3, 4x4
540 MB SCSI	N/A	188666-001	3x3, 4x4
1.08 GB IDE, DFP	65	172941-001	3x3, 4x4
1.05 GB SCSI	N/A	192799-001	3x3, 4x4
2.1 GB Fast SCSI-2	N/A	142272-001	3x3, 4x4

Tape Drives	Spare Part	System	Tape Cart.	Spare Part
340/680 MB w/ Compression	187658-001	3x3, 4x4	340 MB	184299-001
			680 MB	184300-001
525 MB ACA	142073-201	3x3, 4x4	525 MB	119504-001
4 GB TR4, IDE	294126-001		4 GB TR4	294140-001
5.0 GB DAT	142074-201	3x3, 4x4	2.0 GB DAT	131148-001
			5.0 GB DDS2	199496-001

Diskette Drives	Spare Part	System
1.44 MB, 3-Mode	160788-201	3x3, 4x4

SpeedPaq 144/I Internal FAX/Modem

Country	Assembly	Spare Part	System	Page
U.S.	003002-001	147453-001	3x3, 4x4	E-5

ProLinea 450

28.8k-bps Modem

Country	Assembly	Spare Part	RJ-11 Phone Cable	Option
U.S.	223610-002	259214-002	127949-001	259213-001

Cables	Spare Part	System
Kit: IDE CD-ROM/HD Cable (2); Audio Cables (2)	172478-001	3x3, 4x4
Diskette Drive Cable (3x3)	172477-001	3x3
Diskette Drive Cable (4x4)	172797-001	4x4
2-Device SCSI, 3-Connector	146997-001	3x3, 4x4
LED Cable Assembly	172531-001	3x3, 4x4
Hard Drive Select Cable	172945-001	Option
2-Device SCSI, 3-Connector, Plug and Play	184118-001	3x3, 4x4


ROM Information	Spare Part	System
System ROMPaq	148218-001	3x3, 4x4

Power Supply/Battery	Spare Part	System
Power Supply, 145 W, U.S.	172765-001	3x3, 4x4
Power Supply, 145 W, PFC, Outside U.S.	172766-001	3x3, 4x4
Real-Time Clock Battery (4.5 V alkaline)	160274-001	3x3, 4x4, 5x5


ProLinea 450

Memory Upgrade Chart

PROCESSOR BOARD
003822, 003825, 003910, 003922
(4, 8, or 16 MB)

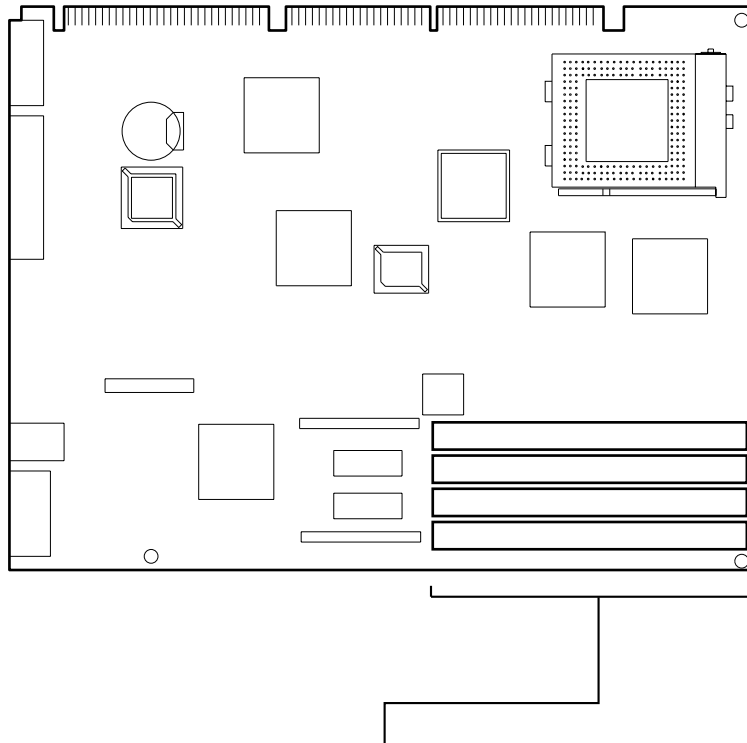

ADD ANY COMBINATION OF THE FOLLOWING MEMORY MODULES,
UP TO 136 MEGABYTES TOTAL SYSTEM MEMORY



4-MB 70ns - OPTION PN 172712-001

8-MB 70ns - OPTION PN 172713-001

16-MB 70ns - OPTION PN 172714-001

32-MB 70ns - OPTION PN 172715-001