

Deskpro 386s/20N

System Boards	Assembly	Spare Part
386SX System	002353	136521-001

SW1 Settings for System Board 002353

Switch	Setting	Function
S1	ON *	Enable integrated VGA
S1	OFF	Disable integrated VGA
S2	ON *	Enable Setup
S2	OFF	Disable Setup
S3	ON *	Enable External Boot
S3	OFF	Disable External Boot
S4	ON *	Enable Power-On Password
S4	OFF	Disable Power-On Password
S5	ON *	Reserved
S6	ON *	Enable Diskette Write
S6	OFF	Disable Diskette Write

* Default.

Fan Jumper

Setting	Function
E1-1 to E1-2	Full
E1-2 to E1-3	Auto

Memory Boards	Assembly	Spare Part
Memory Expansion	001457	118739-001
1 MB Memory	118666	113911-001
2 MB Memory	118667	113923-001
		DISCONTINUED
4 MB Memory	137930	137965-001

Video Board	Assembly	Spare Part
Qvision 1024/I Controller *	002163	126655-001

* See Multiproduct Boards Appendix, for settings.

Hard Drives

Size	Type	Inter-leave	Inte-grated	Min ROM	Spare Part
40 MB	22	1:1	Y	072691	Not Available
40 MB	17	1:1	Y	072691	Not Available
60 MB	55	1:1	Y	072691	Not Available
84 MB	27	1:1	Y	072691	Not Available
120 MB	50	1:1	Y	072691	113962-001 ¹
					111910-001 ²
					116806-001 ²

¹ Except Europe.

² Europe Only.

Diskette Drives

	Spare Part
360 KB	112567-001
1.2 MB	112566-001
1.44 MB *	112565-001

* Requires MS-DOS Version 3.31 Revision A if installed as drive B, and MS-DOS Version 3.31 Revision B if installed as drive A.

Deskpro 386s/20N

Miscellaneous	Assembly	Spare Part
2400-Baud Internal Modem	001070	Not Available
9600/2400 Fax Modem **		197458-001
		DISCONTINUED
Backplane	001451	118742-001
Serial/Parallel Interface *	000570	106886-001
Serial/Parallel Interface *	000990	106886-001

* See Multiproduct Boards Appendix, for settings.

** See Modem Configuration Information Appendix.

Cables	Used With	Spare Part
Diskette Power	1.2MB Diskette & Hard Drive	113939-001
Diskette Signal	1.2MB Diskette	113938-001
Diskette Signal/Power	1.44 MB Diskette	113930-001
Mass Storage Power	All Hard Drives	113927-001
Mass Storage Signal	All Hard Drives	113928-001
Serial Diagnostic Cable	Remote Unit	118773-001

Processor/Coprocessor Locations (System Board 002353)

Processor (386SX-20)	Coprocessor (387SX-20)
U5	U58

System ROM Location (001421, 002040)

U13


System ROM Revisions (Spare Part 118775-001)

Revision	Number on ROM
072691	136522-001

Battery/Power Supply	Spare Part
Battery/Clock Module	107872-001
Power Supply	118743-001

Deskpro 386s/20N

Memory Upgrade Chart

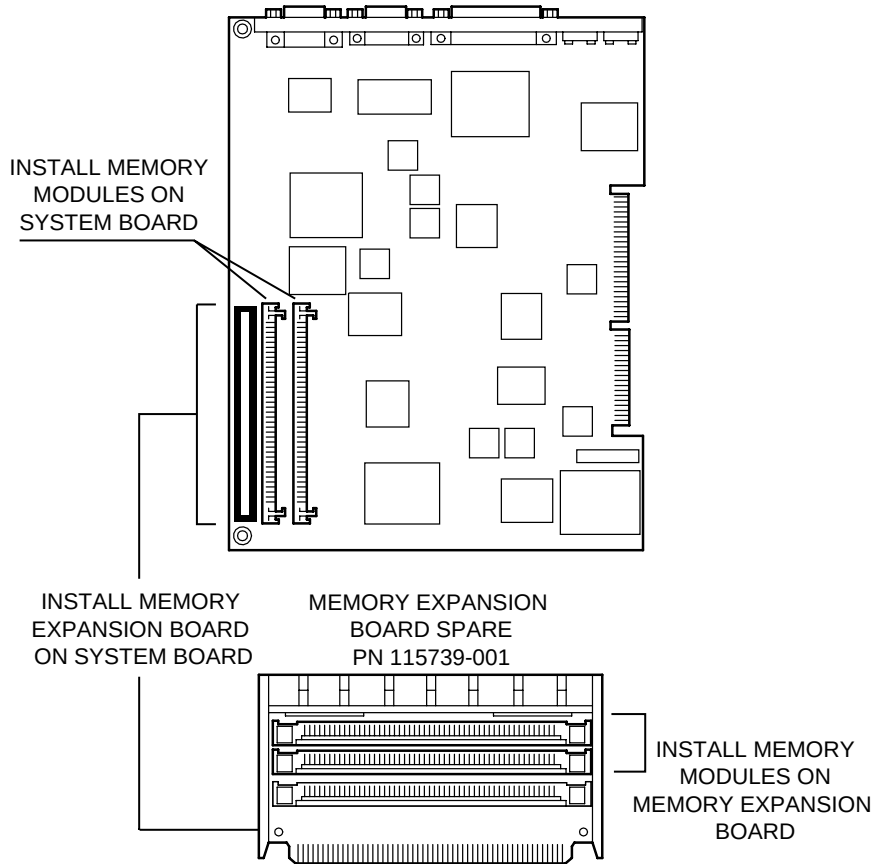


INSTALL MEMORY MODULES IN ANY COMBINATION AND IN ANY ORDER IN THE **TOP TWO SLOTS** ON THE MEMORY EXPANSION BOARD

MAXIMUM MEMORY:
16 MEGABYTES

1-MB MEMORY MODULE
SPARE PN 113911-001



2-MB MEMORY MODULE
OPTION PN 118689-001



4-MB MEMORY MODULE
OPTION PN 137935-001

