

Rack-Mountable ProLiant 6400R

System/Processor Boards	Assembly	Spare Part
Processor Board, w/ Tray	329368-002	123888-001
Processor Terminator Board	179680-001	329271-001

SW1 Switch Settings (329368)

SW	Function	Default Position
S1	VIDEO DISABLE	OFF
S2	CONFIGURATION LOCK	OFF
S3	RACK-MOUNTABLE CHASSIS	ON
S4	DISKETTE BOOT OVERRIDE	OFF
S5	PASSWORD DISABLE	OFF
S6	CLEAR CONFIGURATION CONTENTS	OFF

The "ON" position activates the function.

Processor Core Frequency Switch Settings (SW2 and SW3)

Processor (MHz)	S1	S2	S3	S4
500	ON	ON	OFF	OFF
550	OFF	ON	OFF	OFF

Configuration Code	System Board Spare Part
CJP1	123888-001
CJP2	123888-001
CJP3	123888-001
CJQ1	123888-001
CJQ2	123888-001
CJQ3	123888-001
CJR1	123888-001
CJR2	123888-001
CJR3	123888-001

Microprocessors	System	Spare Part
Processor, 500/100, 512K, w/ Heat Sink	CJP1	116313-001
Processor, 500/100, 1 MB, w/ Heat Sink	CJQ1	122636-001
Processor, 500/100, 2 MB, w/ Heat Sink	CJR1	122637-001
Processor, 550/100, 512K, w/ Heat Sink*	CJP3	122635-001
Processor, 550/100, 1 MB, w/ Heat Sink*	CJQ3	122639-001
Processor, 550/100, 2 MB, w/ Heat Sink*	CJR3	122640-001

*Requires use of a high airflow rack door. Failure to use will void the warranty. See Options section for airflow ordering part numbers.

Memory Boards/Modules	Assembly	Spare Part
64 MB DIMM, ECC, EDO	228469-002	330739-001
128 MB DIMM, ECC, EDO	228470-002	330740-001
256 MB DIMM, ECC, EDO	228471-002	330741-001
Memory Expansion Board	008281-001	328703-001

Controller Boards	Assembly	Spare Part
PCI 64 Board, Dual 10/100 I-Base	009542-001	338478-001

Rack-Mountable ProLiant 6400R

Miscellaneous Internal	Assembly	Spare Part
Pass Through Board, CD-ROM	010243-001	101927-001
Fan, Dual	70G00301	101931-001
Fan, I/O (2 per system)	70G00201	101933-001
Fan, Rear External	70G00401	101947-001
Fan, Redundant Rear	158195-001	158608-001
Power Backplane Board, w/ Tray	70G00501	101973-001
Backplane Board, PCI, Hot-Plug	008303-001	328835-001
Power Switch w/ LED	OSP03631	101976-001
Voltage Regulator Board, Redundant	303990-001	328842-001
Voltage Regulator Board, Non-Redundant	320327-001	328701-001
	320325-001	
Standard Peripheral Board	008284-001	328844-001
SCSI Simplex Board, LVD	010060-001	387090-001
PCI Basket Insulator Assembly	179682-001	387886-001

Miscellaneous External	Spare Part
Rack Mounting Kit	134699-001
Hardware Kit, Miscellaneous	122634-001
Plastic Kit, Miscellaneous	387886-001
See "Rack Mountable ProLiant Storage System" section for information on:	
* External hot-pluggable hard drives	
* Stand-By Recovery Server Option and cables	
* On-Line Recovery Server Option and cables	
See "Rack Mountable SCSI Storage Expander" section for information on:	
* External non-pluggable hard drives	
* External tape drives	

Hard Drives	Spare Part
4.3 GB Wide-Ultra2, 7200 rpm	349530-001
4.3 GB Wide-Ultra2, 10K rpm	386535-001
9.1 GB Wide-Ultra2, 7200 rpm	349531-001
9.1 GB Wide-Ultra2, 10K rpm	386536-001
18.2 GB Wide-Ultra2, 7200 rpm	104663-001

CD-ROM Drives	Assembly	Spare Part
24X, IDE	314933-509	327921-001
24X, IDE Max	314933-589	128400-001


Diskette Drives	Assembly	Spare Part
1.44 MB	141087-105	288456-001

Cables	Assembly	Spare Part
Cable Kit, Power, Misc		101952-001
Cable Kit, Signal, Misc		101953-001
Cable, Diskette Drive Signal, External	166240-001	169034-001


Power Supply/Battery	Assembly	Spare Part
Power Supply, 450W, Hot-Plug, Red, Opal	401401-001	101920-001
Power Supply, Blank Cover	OSA04171	122641-001
Battery, Peripheral Board	334149-001	179322-001

Rack-Mountable ProLiant 6400R

Memory Upgrade Chart

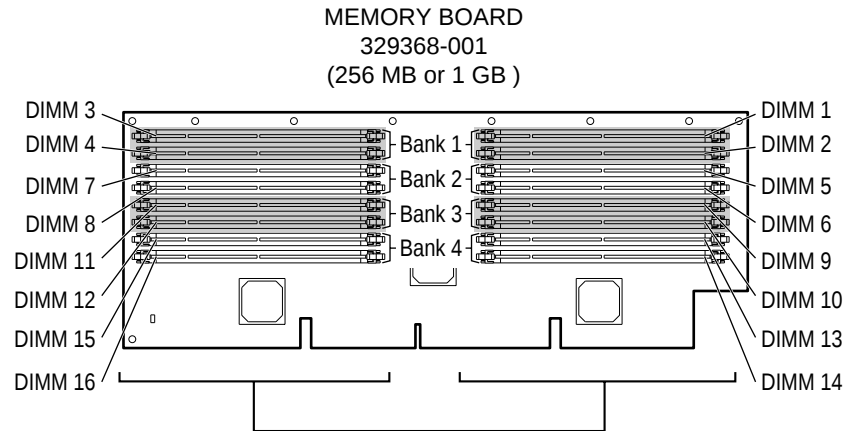

A MAXIMUM OF 4.0 GB TOTAL MEMORY
A GROUP OF FOUR IDENTICAL DIMMs (SAME
SIZE AND SPEED) MUST BE INSTALLED IN EACH BANK



128-MB (4 x 32-MB EDO DIMMs, 50 ns) - OPTION PN 328580-B21
256-MB (4 x 64-MB EDO DIMMs, 50ns) - OPTION PN 328581-B21
512-MB (4 x 128-MB EDO DIMMs, 50ns) - OPTION PN 328582-B21
1024-MB (4 x 256-MB EDO DIMMs, 50 ns) - OPTION PN 328583-B21

128-MB (4 x 32-MB EDO DIMMs, 60 ns) - OPTION PN 328580-B21
256-MB (4 x 64-MB EDO DIMMs, 60ns) - OPTION PN 328581-B21
512-MB (4 x 128-MB EDO DIMMs, 60ns) - OPTION PN 328582-B21
1024-MB (4 x 256-MB EDO DIMMs, 60 ns) - OPTION PN 328583-B21